



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PVM Series

NEW

PVM

High CV
Low ESR



PVH

■ Specification


Item	Performance																	
Category temperature range(°C)	-55°C ~ +105°C																	
Tolerance at rated capacitance(%)	-20% ~ +20% (20°C, 120Hz)																	
Leakage current(μA)	Less than 0.2 CV(2minutes) C:Rated capacitance(μF), V:Rated voltage (V)																	
Tangent of the loss angle (tanδ)	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>2.5</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> </tr> <tr> <td>tanδ (max)</td> <td colspan="5">0.12</td> </tr> </table> <p>(20°C, 120Hz)</p>	Rated voltage (V)	2.5	4	6.3	10	16	tanδ (max)	0.12									
Rated voltage (V)	2.5	4	6.3	10	16													
tanδ (max)	0.12																	
Characteristics at high and low temperature	<table border="1"> <tr> <td>Rated voltage (V)</td> <td>2.5</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> </tr> <tr> <td rowspan="2">Impedance ratio (max)</td> <td>Z-25°C/Z+20°C</td> <td colspan="4">1.15</td> </tr> <tr> <td>Z-55°C/Z+20°C</td> <td colspan="4">1.25</td> </tr> </table> <p>(120Hz)</p>	Rated voltage (V)	2.5	4	6.3	10	16	Impedance ratio (max)	Z-25°C/Z+20°C	1.15				Z-55°C/Z+20°C	1.25			
Rated voltage (V)	2.5	4	6.3	10	16													
Impedance ratio (max)	Z-25°C/Z+20°C	1.15																
	Z-55°C/Z+20°C	1.25																
Endurance 105°C Applied ripple current	<table border="1"> <tr> <td>Test time</td> <td>2000 hours</td> </tr> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within± 20%of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150%or less of the initial specified value</td> </tr> <tr> <td>E.S.R. change</td> <td>150%or less of the initial specified value</td> </tr> </table>	Test time	2000 hours	Leakage current	The initial specified value or less	Percentage of capacitance change	Within± 20%of initial value	Tangent of the loss angle	150%or less of the initial specified value	E.S.R. change	150%or less of the initial specified value							
Test time	2000 hours																	
Leakage current	The initial specified value or less																	
Percentage of capacitance change	Within± 20%of initial value																	
Tangent of the loss angle	150%or less of the initial specified value																	
E.S.R. change	150%or less of the initial specified value																	
Bias Humidity 60°C 90 ~ 95%RH	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 60°C, 90 to 95%RH for 500 hours.</p> <table border="1"> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within± 20%of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150%or less of the initial specified value</td> </tr> <tr> <td>E.S.R. change</td> <td>150%or less of the initial specified value</td> </tr> </table>	Leakage current	The initial specified value or less	Percentage of capacitance change	Within± 20%of initial value	Tangent of the loss angle	150%or less of the initial specified value	E.S.R. change	150%or less of the initial specified value									
Leakage current	The initial specified value or less																	
Percentage of capacitance change	Within± 20%of initial value																	
Tangent of the loss angle	150%or less of the initial specified value																	
E.S.R. change	150%or less of the initial specified value																	
Surge Voltage	<p>The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds.</p> <table border="1"> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within± 20%of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150%or less of the initial specified value</td> </tr> <tr> <td>E.S.R. change</td> <td>150%or less of the initial specified value</td> </tr> </table>	Leakage current	The initial specified value or less	Percentage of capacitance change	Within± 20%of initial value	Tangent of the loss angle	150%or less of the initial specified value	E.S.R. change	150%or less of the initial specified value									
Leakage current	The initial specified value or less																	
Percentage of capacitance change	Within± 20%of initial value																	
Tangent of the loss angle	150%or less of the initial specified value																	
E.S.R. change	150%or less of the initial specified value																	
Failure Rate	Less than 1% 1000 hours (Confidence level 60%at 105°C)																	

Note : If any doubt arises, measure the leakage current after following voltage treatment.

Voltage treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105°C.

Outline Drawing

Unit: mm

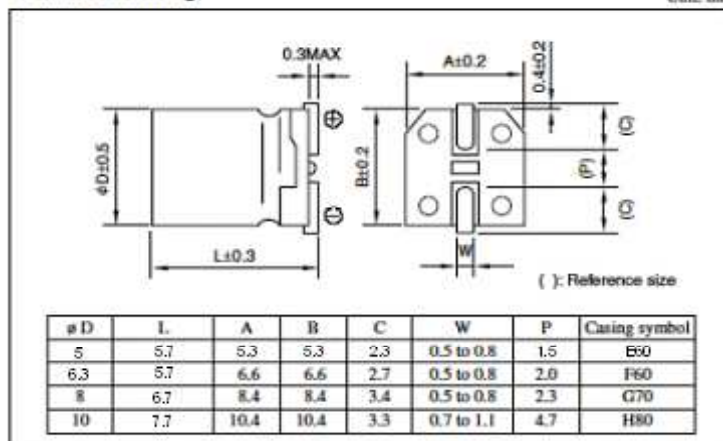

■ Standard Ratings

ELNA
UH-6901

製品記号 Code number	定格電圧 Rated voltage (V)	定格静電容量 Rated capacitance (μ F)	ESR ($m\Omega$) 20°C 100kHz	損失角の正接 Tangent of loss angle ($\tan\delta$)	定格リップル電流 Rated ripple current (mArms) 105°C 100kHz	外形寸法 External dimensions (mm)	
						D	L
PVM- 2R5V181ME60- R2	2.5	180	21	0.12	2,670	5	5.7
PVM- 2R5V391MF60- R2	2.5	390	15	0.12	3,160	6.3	5.7
PVM- 2R5V561MG70- R2	2.5	560	13	0.12	3,600	8	6.7
PVM- 2R5V681MG70- R2	2.5	680	13	0.12	4,100	8	6.7
PVM- 2R5V122MH80- R2	2.5	1,200	13	0.12	4,450	10	7.7
PVM- 4V101ME60- R2	4	100	22	0.12	2,610	5	5.7
PVM- 4V151ME60- R2	4	150	22	0.12	2,610	5	5.7
PVM- 4V271MF60- R2	4	270	15	0.12	3,160	6.3	5.7
PVM- 4V331MF60- R2	4	330	15	0.12	3,160	6.3	5.7
PVM- 4V471MG70- R2	4	470	14	0.12	3,950	8	6.7
PVM- 4V561MG70- R2	4	560	14	0.12	3,950	8	6.7
PVM- 4V102MH80- R2	4	1,000	14	0.12	4,300	10	7.7
PVM- 6V101ME60- R2	6.3	100	24	0.12	2,500	5	5.7
PVM- 6V121ME60- R2	6.3	120	24	0.12	2,500	5	5.7
PVM- 6V221MF60- R2	6.3	220	15	0.12	3,160	6.3	5.7
PVM- 6V331MG70- R2	6.3	330	14	0.12	3,950	8	6.7
PVM- 6V391MG70- R2	6.3	390	14	0.12	3,950	8	6.7
PVM- 6V821MH80- R2	6.3	820	14	0.12	4,300	10	7.7
PVM- 10V470ME60- R2	10	47	28	0.12	2,310	5	5.7
PVM- 10V560ME60- R2	10	56	28	0.12	2,310	5	5.7
PVM- 10V680ME60- R2	10	68	28	0.12	2,310	5	5.7
PVM- 10V121MF60- R2	10	120	25	0.12	2,530	6.3	5.7
PVM- 10V221MG70- R2	10	220	21	0.12	3,220	8	6.7
PVM- 10V271MG70- R2	10	270	21	0.12	3,220	8	6.7
PVM- 10V471MH80- R2	10	470	19	0.12	3,800	10	7.7
PVM- 16V330ME60- R2	16	33	35	0.12	2,070	5	5.7
PVM- 16V390ME60- R2	16	39	35	0.12	2,070	5	5.7
PVM- 16V680MF60- R2	16	68	28	0.12	2,390	6.3	5.7
PVM- 16V101MG70- R2	16	100	24	0.12	3,010	8	6.7
PVM- 16V121MG70- R2	16	120	24	0.12	3,010	8	6.7
PVM- 16V221MH80- R2	16	220	22	0.12	3,450	10	7.7

Recommended soldering conditions

Standard type (Lead free)

(1) Methods

See the following


Methods	Reflow soldering	Soldering iron	Flow soldering
Advisability	○	○	×

(2) Soldering iron conditions

Iron tip temperature shall be $400^{\circ}\text{C} \pm 5^{\circ}\text{C}$ within the duration of 3 ± 1 seconds.

(3) Reflow soldering conditions

Profile

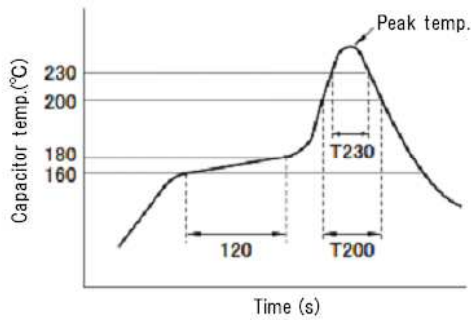


T200: Duration while capacitor head temperature exceeds 200°C (s)

T230: Duration while capacitor head temperature exceeds 230°C (s)

The measurement temperature point is the case top.

Peak temp. matrix

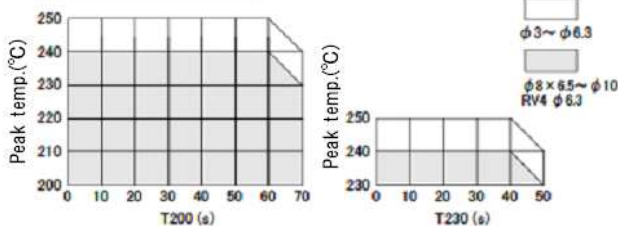


1. Preheating shall be under 180°C within 120 seconds.
2. Peak temperature shall be within the peak temperature matrix.
3. For conditions exceeding the tolerances, consult with us.

推奨ランド寸法


Recommended land pattern.

単位: mm
Unit

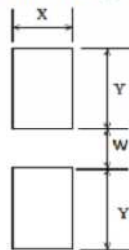

ケースサイズ Case size	X	Y	W
φ5.0×5.7	1.6	3.0	1.4
φ6.3×5.7	1.6	3.6	1.9
φ8.0×6.7	2.5	3.5	3.0
φ10.0×7.7	2.5	4.0	4.0

テーピング
Taping
キャリアテープ
Carrier tape

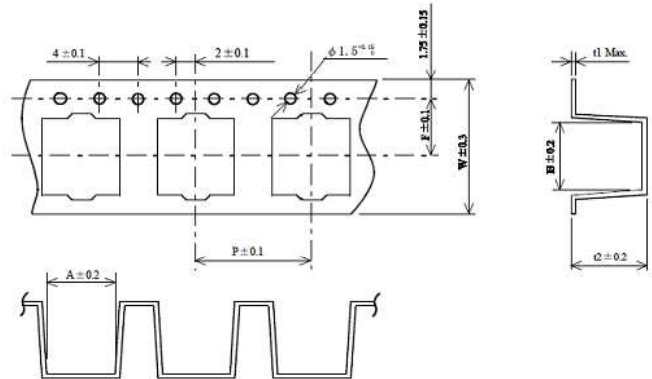

単位: mm
Unit

ケースサイズ Case size	W	A	B	P	t 2	F	t 1
φ 5 X 5.7	12.0	5.7	5.7	12	6.2	5.5	0.4
φ 6.3 X 5.7	16.0	7.0	7.0	12	6.2	7.5	0.4
φ 8 X 6.7	24.0	8.7	8.7	12	7.2	11.5	0.4
φ 10 X 7.7	24.0	10.7	10.7	16	8.2	11.5	0.4

- Design, Specifications are subject to change without notice.
- Ask factory for technical specifications before purchase and/or use.

ELNA Co., LTD.
http://www.elna.co.jp/

エルナー(株) 神奈川県横浜市港北区3-8-11 〒222-0033
営業統括部 TEL: 045-470-7254 FAX: 045-470-7260

ELNA Co., LTD.

3-8-11 Shi nyokohama, kouhoku-ku, yokohama-city, kanagawa, 222-0033, JAPAN
TEL: 045-470-7254 FAX: 045-470-7260

■ Cautions for Using Solid Conductive Polymer Aluminum Electrolytic Capacitors

Please be sure to read this specification before using this product.

Before placing an order, please inquire about the Product Specification to check details.

■ Cautions for Usage

1. Solid conductive polymer aluminum electrolytic capacitors are polarized.

- Using a capacitor with reversed polarity causes abnormal current flow, resulting in a short circuit.

2. Prohibited Circuits

- Since leakage current problem may arise, capacitors cannot be used in the following circuits:

- ① Coupling circuits
- ② Circuits greatly affected by leakage current

3. Use capacitors within the rated voltage.

- The application of voltages exceeding the rated voltage can significantly increase leakage current, resulting in a short failure. Please do not apply a voltage exceeding the rated voltage.

4. Be careful of excessive rush current.

- Using capacitors in the circuit where excessive rush current passes may cause characteristic deterioration or a short. When the rush current exceeds 10 A, we recommend use of protection circuits to ensure high reliability.

5. Use the allowable ripple voltage and the rated ripple current below the specified values.

- When superimposing a ripple voltage on a DC bias voltage, exercise care that the peak voltage value does not exceed the rated voltage.
- The rated ripple current shall be below the specified value.

6. Changes in characteristics due to operating temperature

- The characteristics of solid conductive polymer aluminum electrolytic capacitors vary by temperature as follows. These variations are temporary and recover when the temperature goes back (except for the case of characteristic deterioration because of high temperatures over a long time). Note that using capacitors over the upper category temperature increases leakage current, resulting in a short and destruction.

Be careful of the capacitor temperature considering not only the ambient temperature where the equipment is placed and the temperature inside the equipment but also radiation heat from the heating element inside the equipment, and self-heat generation by ripple current.

- ① Capacitance expressed in the value at 20°C, 120 Hz increases with increased temperature and

decreases with decreasing temperature.

- ② Tangent of loss angle ($\tan \delta$) expressed in the value at 20°C, 120 Hz is temperature-independent.
- ③ Equivalent series resistance (ESR) expressed in the value at 20°C, 100 kHz is temperature-independent.
- ④ Leakage current increases with increased temperature and decreases with decreasing temperature.

7. Changes in characteristics due to frequency

- The characteristics of solid conductive polymer aluminum electrolytic capacitors vary by operating frequency as follows.

- ① Capacitance expressed in the value at 20°C, 120 Hz decreases with increased frequency.
- ② Tangent of loss angle ($\tan \delta$) expressed in the value at 20°C, 120 Hz increases with increased frequency.
- ③ Equivalent series resistance (ESR) expressed in the value at 20°C, 100 kHz increases with decreasing frequency.

8. Failure modes of solid conductive polymer aluminum electrolytic capacitors

- The failure modes of solid conductive polymer aluminum electrolytic capacitors are a wear-out failure by deterioration of electrical performance and a random failure by a short. The failure rate level is 1%/1,000h at the reliability level of 60% with the specified voltage applied at 105°C.
- If a short occurs and continues with the application of a voltage exceeding the rated voltage, increasing the internal temperature, the internal pressure increases by vaporization of the cathode material, which may cause the aluminum case to come off.

9. Operating environments

- Do not store capacitors in an environment directly exposed to water, saltwater spray, oil spill or condensation.
- Do not store capacitors in an environment filled with toxic gas such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.
- Do not store capacitors in a place exposed to ozone, ultraviolet rays, or radiation.

10. Fumigation Process

- Before transportation of electronic equipment to overseas, fumigation process may be subjected to wooden packing material with a halogen

- Design, Specifications are subject to change without notice.

- Ask factory for technical specifications before purchase and/or use.

ELNA Co., LTD.

<http://www.elna.co.jp/>

エルナー(株) 神奈川県横浜市港北区3-8-11 〒222-0033
営業統括部 TEL: 045-470-7254 FAX: 045-470-7260

ELNA Co., LTD.

3-8-11 Shi nyokohana, kouhoku-ku, yokohama-ci ty, kanagawa, 222-0033, JAPAN
TEL: 045-470-7254 FAX: 045-470-7260

(compound) gas such as methyl bromide. Exercise care that this halogen gas may corrode capacitors. Also, be careful of epidemic preventive agent as corrosive component such as halogen may be contained.

11. The case of solid conductive polymer aluminum electrolytic capacitors and the cathode terminal are not insulated.

- The case and the cathode terminal are not insulated as being connected through inconstant resistance.

12. Double-sided PCB's

- When using capacitors on a double-sided PCB, exercise care that the wiring pattern does not touch the area where the capacitors are mounted. Failure to do so may cause a short to occur to the PCB depending on the mounting conditions.

13. Regarding Connection of Solid Conductive Polymer Aluminum Electrolytic Capacitors

- When connecting more than one capacitor in parallel, consider the current balance.

14. Other Notes

- Do not use capacitors on a circuit where rapid charge and discharge are repeated.
- Electrical characteristics of capacitors vary by variations in temperature and frequency. Please consider these variations when designing a circuit.

■Cautions for Mounting

1. Cautions for Mounting

- Do not reuse capacitors that have been assembled in a set and energized. Capacitors cannot be reused except for those which have been measured on electrical performance during periodic inspection.
- Before mounting, confirm the capacitor ratings (rated capacitance and rated voltage).
- Capacitors may generate transient recovery voltage. In this case, discharge through a resistor of about 1 kΩ.
- Before mounting, confirm the polarity of capacitor.
- Do not drop capacitors onto a floor nor use them.
- Do not mount deformed capacitors.
- Do not mount heating parts around capacitors and on the back of the PCB under or back of capacitors).

2. Do not apply excessive pressure to the capacitor or its terminals

- Be careful of the shock force that can be produced by absorbers, product checkers, and centering on automatic inserters and installers.

3. Soldering

- Do not solder capacitor body by dipping into melted solder.
- Soldering conditions (preheating, soldering temperature, terminal dipping time) should be within the ranges specified in the catalog or the delivery specification.
- Flux should not adhere to the parts other than the terminals.
- When using a soldering iron, avoid excessive stress to capacitor body.
- In reflow soldering, the reflow should be conducted once. Please be sure to consult with us if reflow must be conducted twice.
- Although leakage current may increase (from a few μA to hundreds of μA) after soldering, it can be reduced through self-repair by applying voltage. It is advised to operate the set properly after treating with the recommended voltage.
- In case of a long-term use of equipment, control the soldering characteristics so that capacitors and PCB do not fail to connect to avoid abnormal current passage by a failure of soldering to mount.

4. Handling after Soldering

- Do not tilt, fall, raise or twist capacitor body.
- Do not pick up or move PCB by holding a capacitor.
- Do not bump capacitors against objects. When stacking PCB's, make sure that capacitors do not touch the PCB's or other components.
- Do not subject capacitors to excessive stress.

5. Cleaning after Soldering

- Recommended cleaning method

①cleaning solutions:

- (a) CLEANTHROUGH 710M, 750H, 750L
- (b) PINEALPHA ST-100S
- (c) Techno Care FRW-4-17
- (d) Isopropyl alcohol (2-propanol)

②Cleaning conditions:

- (a) The temperature of cleaning solution shall be less than 60°C.
 - (b) Use immersion or ultrasonic waves within two minutes.
 - (c) After cleaning, capacitors and PCB's shall thoroughly be rinsed and dried with hot blast for more than 10 minutes. The temperature of such breeze should be less than the upper category temperature.
 - (d) After cleaning, do not keep capacitors in cleaning solution atmosphere or airtight containers.
- During cleaning, control the cleaning solution against contamination.

●Design, Specifications are subject to change without notice.

●Ask factory for technical specifications before purchase and/or use.

ELNA Co., LTD.

<http://www.elna.co.jp/>

エルナー(株) 神奈川県横浜市港北区3-8-11 〒222-0033
営業統括部 TEL:045-470-7254 FAX:045-470-7260

ELNA Co., LTD.

3-8-11 Shinyokohama, kouhoku-ku, yokohama-city, kanagawa, 222-0033, JAPAN
TEL:045-470-7254 FAX:045-470-7260

6. Fixing adhesives and coating materials

- Do not use halogenated fixatives and coatings.
- Before using a fixative or coating, remove flux residues and contaminants from between the PCB and the sealing section of capacitors.
- Dry the cleaning solution before using the adhesive or coating.
- Do not cover up all the sealing sections (terminal side) of capacitors with the adhesive or coating.
- Heat curing conditions of fixative and coating

■Other Cautions

1. Do not directly touch the terminals of solid conductive polymer aluminum electrolytic capacitors. Failure to do so can cause electric shock or burns. Before use, allow capacitors to discharge through a 1kΩ resistor (with a sufficient margin to the heat generation capacity) as needed.

2. Do not short-circuit between the terminals of the solid conductive polymer aluminum electrolytic capacitors with electric conductor. Do not subject capacitors to conductive solutions such as acid and alkaline water solutions.

3. Periodic inspection should be performed on the capacitors for the industrial equipment application. Check the following checkpoints.

- Visual inspection to check for significant defects.
- Electrical performance: leakage current, rated capacitance, tangent of loss angle, ESR, and items specified in the catalog or delivery specification.

4. Be careful of the following cases of emergency.

- In case of a short during use of capacitors in sets, producing gas, turn off the main power of the set or unplug the power cord from the outlet.
- In case of a short, producing gas, it may take a few seconds to a few minutes depending on the conditions. Therefore, ensure that the protective circuit of the power supply works during this time.
- If the gas gets in your eyes, rinse them immediately. Gargle if the gas is inhaled.
- Do not lick the electrolyte of capacitors. When the electrolyte gets on your skin, wash it off with soap immediately.

5. Storage Conditions

- Do not store at high temperature and high humidity. Store at a temperature of 5 to 35°C and a relative humidity of less than 75%, keeping free from direct sunlight.
- During delivery, capacitors are stored in airtight aluminum moistureproof bags to ensure satisfactory soldering. Once the bag is opened right before

mounting, it is better to use up the capacitors. If some are unavoidably left over, return them to the aluminum moistureproof bag, and seal the opening hermetically.

- Solid conductive polymer aluminum electrolytic capacitors may have increased leakage current when unused or stored for a long time after mounted on equipment. This phenomenon often occurs at high ambient temperatures; however, leakage current will decrease through voltage treatment. If leakage current still increases after a lapse of more than one year at ambient temperature (shorter time at high temperatures), treat with voltage as needed. In design of equipment, consider the effect of increase in initial current, and install protective circuits as needed.

Please check that recommended voltage treatment conditions are provided for each series.

- Do not store capacitors in an environment directly exposed to water, saltwater spray, oil spill or condensation.
- Do not store capacitors in an environment filled with toxic gas such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.
- Do not store capacitors in a place exposed to ozone, ultraviolet rays, or radiation.

6. Please take the following actions when disposing of solid conductive polymer aluminum electrolytic capacitors.

- Entrust to specialists of industrial waste treatment for incineration.

7. Others

- Before using capacitors, check the details of this delivery specification and catalog as well as the following.

Technical Report of Japan Electronics and Information Technology Industries Association

EIAJ RCR-2367B

Guideline of notabilia for fixed aluminum electrolytic capacitors for use in electronic equipment

• Design, Specifications are subject to change without notice.

• Ask factory for technical specifications before purchase and/or use.

ELNA Co., LTD.

<http://www.elna.co.jp/>

エルナー(株) 神奈川県横浜市港北区3-8-11 〒222-0033
営業統括部 TEL: 045-470-7254 FAX: 045-470-7260

ELNA Co., LTD.

3-8-11 Shi nyokohana, kouhoku-ku, yokohama-city, kanagawa, 222-0033, JAPAN
TEL: 045-470-7254 FAX: 045-470-7260