



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PXAC261002FC

Thermally-Enhanced High Power RF LDMOS FET 100 W, 28 V, 2490 – 2690 MHz

Description


The PXAC261002FC is a 100-watt LDMOS FET with an asymmetric design intended for use in multi-standard cellular power amplifier applications in the 2496 to 2690 MHz frequency band. Features include dual-path design, high gain and a thermally-enhanced package with earless flanges. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PXAC261002FC
Package H-37248-4

Features

- Broadband internal input and output matching
- Asymmetric design
 - Main: P1dB = 40 W Typ
 - Peak: P1dB = 70 W Typ
- Typical Pulsed CW performance, 2590 MHz, 26 V, 160 μ s, 10% duty cycle, Doherty Configuration
 - Output power at P1dB = 46.5 dBm
 - Output power at P3dB = 50.1 dBm
- Capable of handling 10:1 VSWR @28 V, 100 W (CW) output power
- Integrated ESD protection : Human Body Model, Class 1C (per JESD22-A114)
- Low thermal resistance
- Pb-free and RoHS compliant

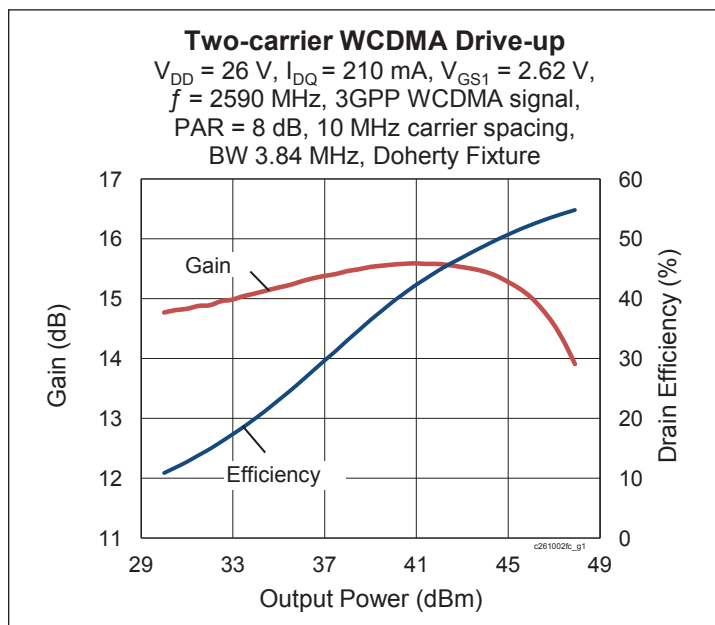

RF Characteristics

Two-carrier WCDMA Specifications (tested in Wolfspeed production Doherty test fixture)

$V_{DD} = 26$ V, $I_{DQ} = 210$ mA, $P_{OUT} = 18$ W avg, $V_{GS2} = 1.4$ V, $f_1 = 2550$ MHz, $f_2 = 2590$ MHz, 3GPP signal, 3.84 MHz channel bandwidth, 8 dB peak/average @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	14.1	15.1	—	dB
Drain Efficiency	η_D	46	49	—	%
Intermodulation Distortion	IMD	—	-22	-21	dBc
Output PAR at 0.01% probability on CCDF (one-carrier WCDMA, 2585 MHz, 10 dB PAR)	OPAR	7.5	—	—	dB

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

DC Characteristics (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1	μA
	$V_{DS} = 63\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10	μA
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1	μA
On-State Resistance	(main) $V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.3	—	Ω
	(peak) $V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.16	—	Ω
Operating Gate Voltage	(main) $V_{DS} = 26\text{ V}$, $I_{DQ} = 210\text{ mA}$	V_{GS}	2.1	2.6	3.1	V
	(peak) $V_{DS} = 26\text{ V}$, $I_{DQ} = 0\text{ mA}$	V_{GS}	0.9	1.4	1.9	V





Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	−6 to +10	V
Operating Voltage	V_{DD}	0 to +32	V
Junction Temperature	T_J	225	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	−65 to +150	$^{\circ}\text{C}$
Thermal Resistance (Doherty, $T_{CASE} = 70^{\circ}\text{C}$, 100 W CW)	$R_{\theta JC}$	0.6	$^{\circ}\text{C/W}$


Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PXAC261002FC V1 R0	PXAC261002FC-V1-R0	H-37248-4, open-cavity, push-pull, earless flange	Tape & Reel, 50 pcs
PXAC261002FC V1 R250	PXAC261002FC-V1-R250	H-37248-4, earless flange push-pull, earless flange	Tape & Reel, 250 pcs

Typical Performance (data taken in a production Doherty test fixture)

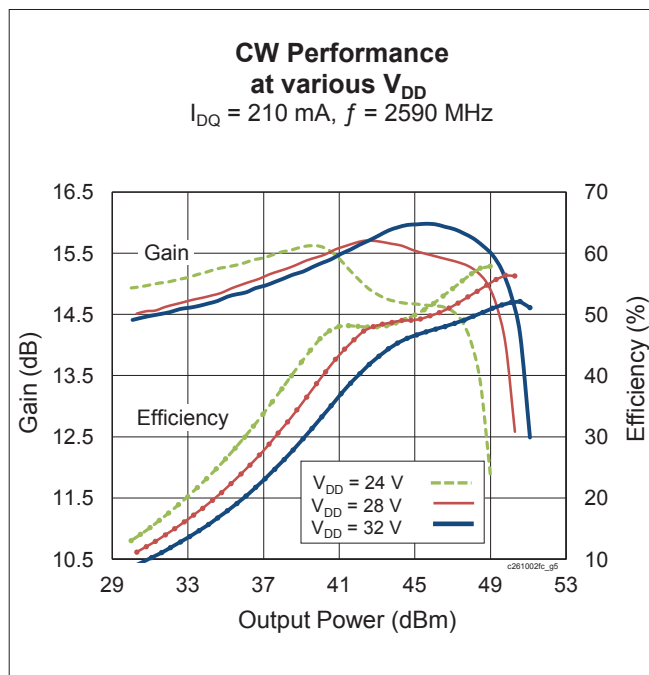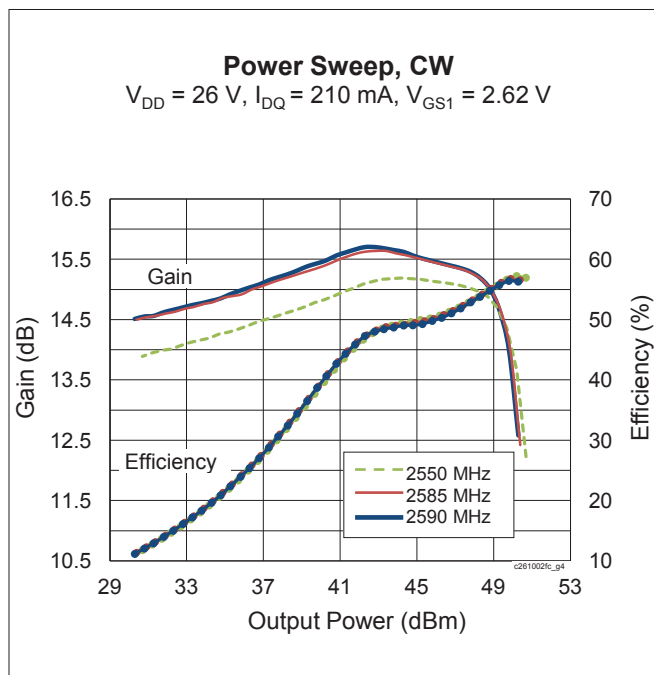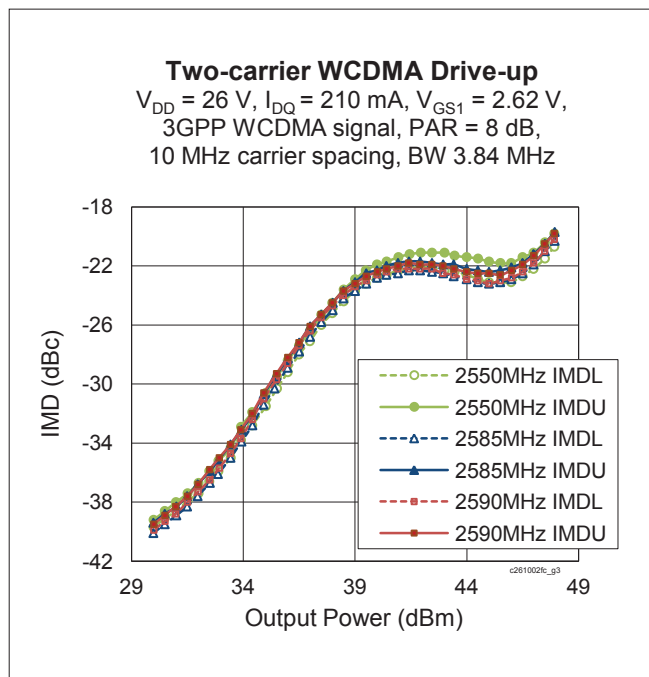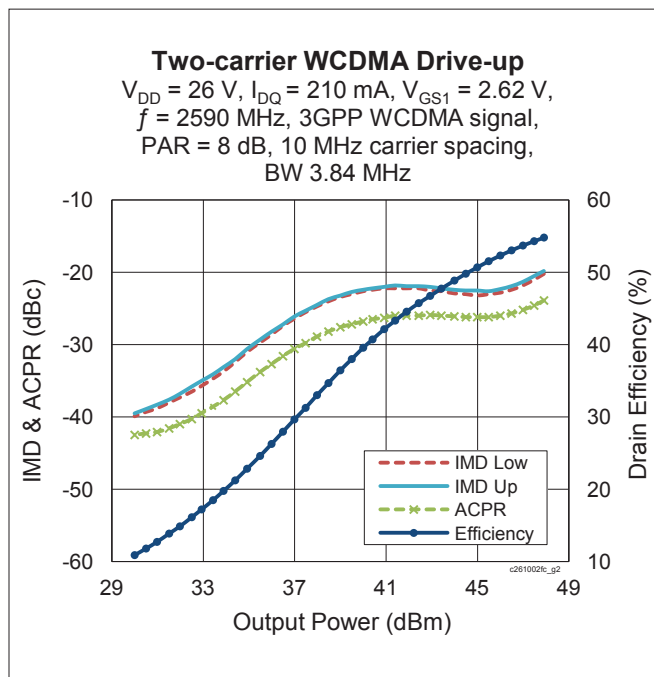

Typical Performance (cont.)

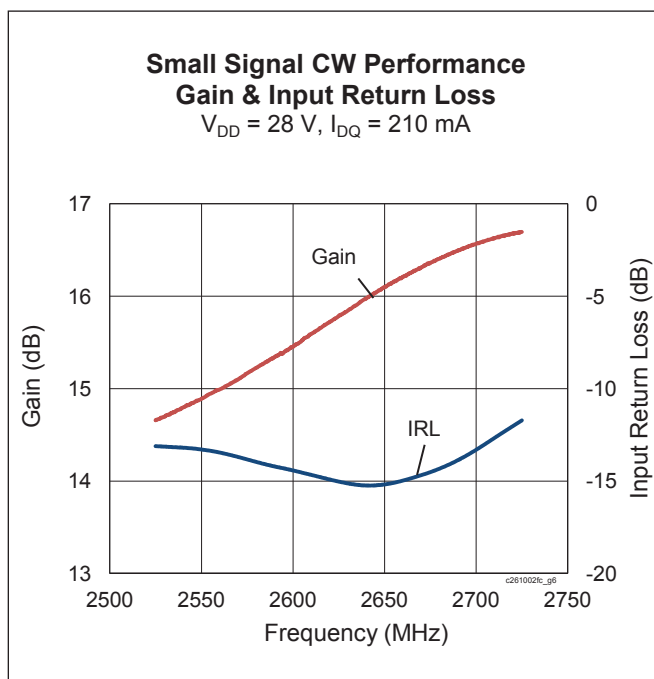


Load Pull Performance

Main Side Load Pull Performance – Pulsed CW signal: 160 μs , 10% duty cycle, $V_{DD} = 28\text{ V}$, $I_{DQ} = 240\text{ mA}$

		P _{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Z _s [Ω]	Z _L [Ω]	Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]	Z _L [Ω]	Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]
2540	13.3 – j23.8	5.7 – j10.9	16.8	46.58	45	50.3	10.9 – j7.1	19.1	45.1	32	59.5
2590	16.5 – j22.0	5.9 – j11.5	16.7	46.44	44	50.3	9.7 – j7.6	18.7	45.3	34	58.5
2640	21 – j24.7	6.4 – j11.5	16.8	46.35	43	50.0	10 – j6.2	19.1	44.9	31	58.0

Peak Side Load Pull Performance – Pulsed CW signal: 160 μs , 10% duty cycle, 28 V, $V_{GS1} = 1.4\text{ V}$

		P _{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Z _s [Ω]	Z _L [Ω]	Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]	Z _L [Ω]	Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]
2540	3.8-j12.1	11.8-j7.3	13.0	50	100	53.5	5.2-j5.3	14.4	48.4	69	63.4
2590	5.2-j12.8	13-j5.4	12.8	50	100	53.4	5.7-j5.6	14.2	48.5	71	62.2
2640	5.8-j13.3	14-j3.9	12.8	49.9	98	52.9	6.6-j6	14.2	48.4	69	61.0

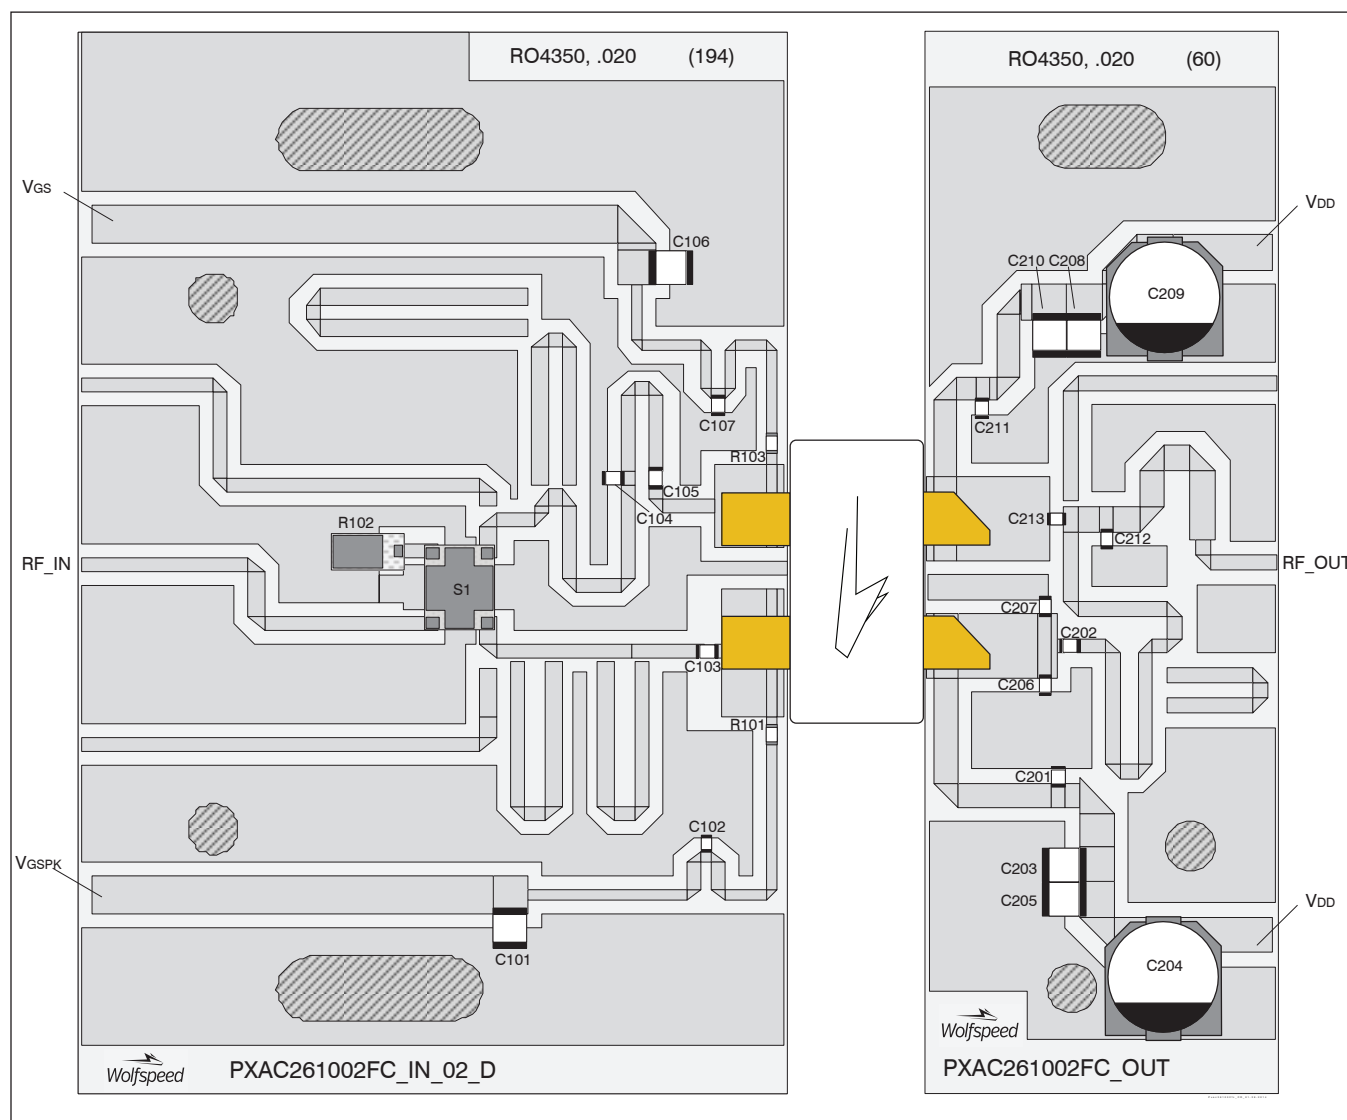
Reference Circuit, 2545 – 2595 MHz*Reference circuit assembly diagram (not to scale)*

Reference Circuit (cont.)**Reference Circuit Assembly**

DUT	PXAC261002FC V1
Test Fixture Part No.	LTA/PXAC261002FC V1
PCB	Rogers 4350, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$, $f = 2545 - 2595$ MHz
Find Gerber files for this test fixture on the Wolfspeed Web site at http://www.wolfspeed.com/RF	

Components Information

Component	Description	Suggested Manufacturer	P/N
Input			
C101, C106	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C102	Capacitor, 18 pF	ATC	ATC800A180JT250T
C103	Capacitor, 1.6 pF	ATC	ATC800A1R6CT250T
C104	Capacitor, 0.6 pF	ATC	ATC800A0R6CT250T
C105, C107	Capacitor, 12 pF	ATC	ATC800A120JT250T
R101, R103	Resistor, 10 ohm	Panasonic Electronic Components	ERJ-3GEYJ100V
R102	Resistor, 50 ohm	Anaren	C16A50Z4
S1	Hybrid coupler	Anaren	X3C26P1-03S
Output			
C201, C202	Capacitor, 12 pF	ATC	ATC800A120KT250T
C203, C205, C208, C210	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C204, C209	Capacitor, 220 μ F	Panasonic Electronic Components	EEE-FP1V221A
C206	Capacitor, 0.5 pF	ATC	ATC800A0R5CT250T
C207	Capacitor, 0.6 pF	ATC	ATC800A0R6CT250T
C211	Capacitor, 12 pF	ATC	ATC800A120JT250T
C212	Capacitor, 0.4 pF	ATC	ATC800A0R4CT250T
C213	Capacitor, 3.9 pF	ATC	ATC800A3R9CT250T

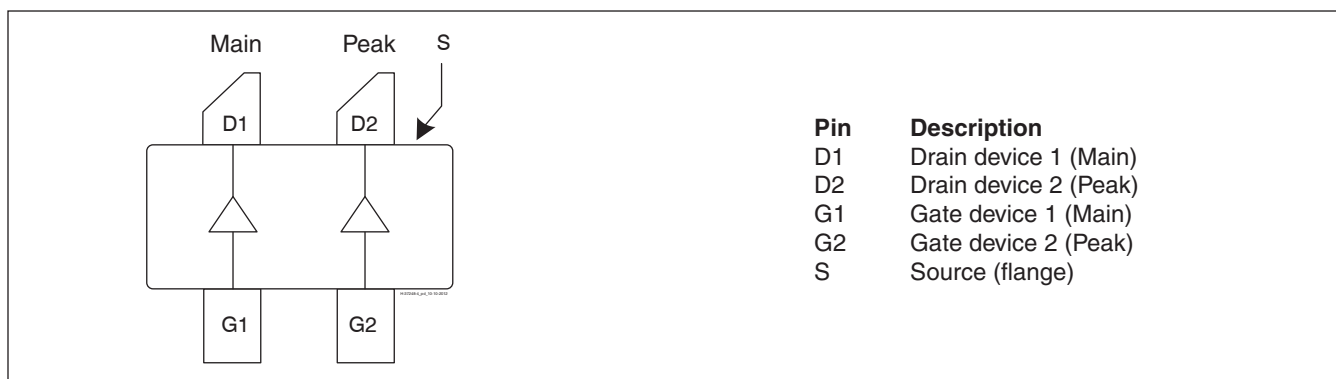Pinout Diagram (top view)

Lead connections for PXAC261002FC

Package Outline Specifications

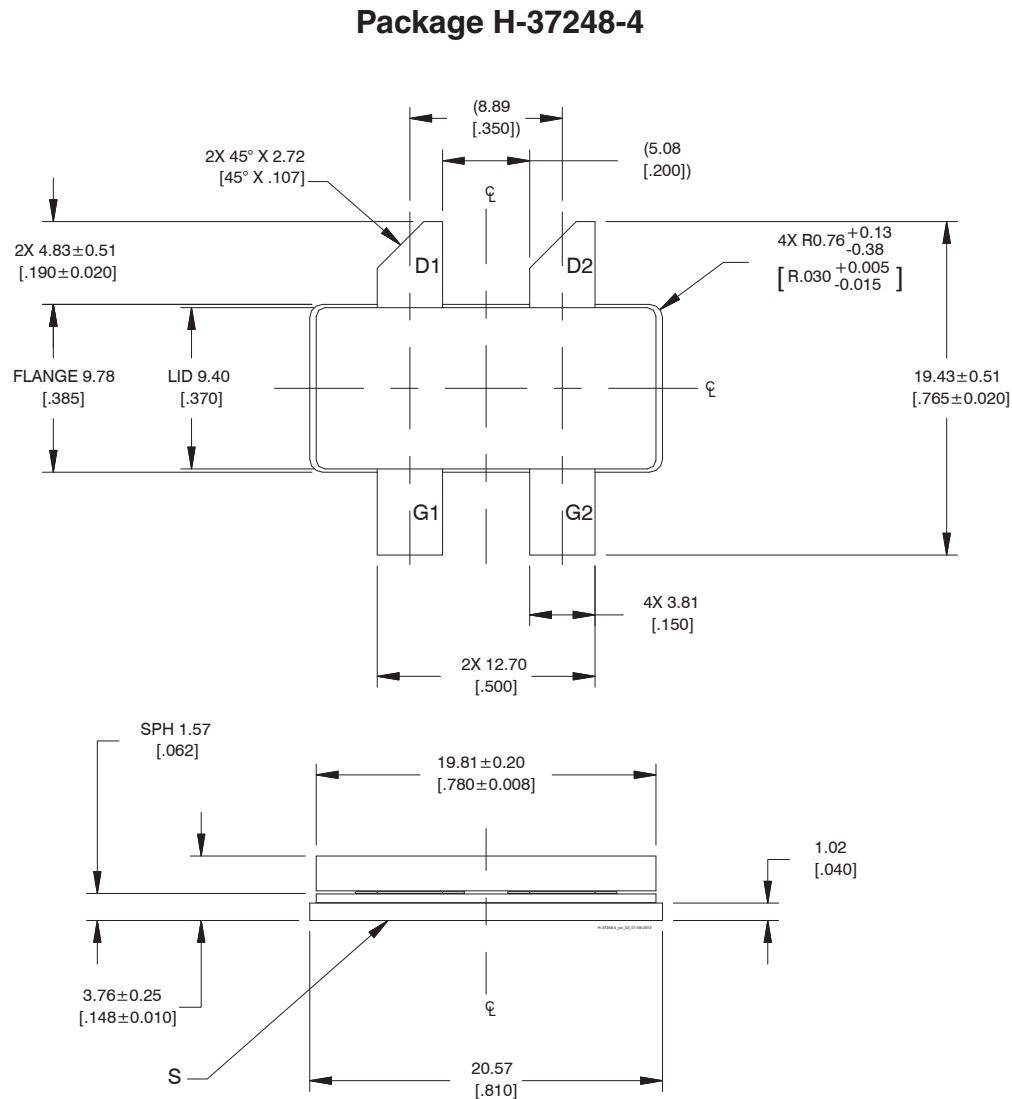


Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. All tolerances ± 0.127 [.005] unless specified otherwise.
4. Pins: D1, D2 – drains; G1, G2 – gates; S – source.
5. Lead thickness: $0.10 + 0.076/-0.025$ mm [$0.004+0.003/-0.001$ inch].
6. Gold plating thickness: 1.14 ± 0.38 micron [45 ± 15 microinch].

Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2013-11-01	Advance	All	Data Sheet reflects advance specification for product development
02	2014-01-28	Production	All	Data Sheet reflects released product specification Revised all data and includes final specs, typical performance graphs, loadpull, reference circuit
03	2014-03-26	Production	1	Corrected frequency range. Removed "doherty" from second feature. Updated feature 2.
03.1	2014-04-04	Production	1	Removed bullet point 4 (extra lines) from Features section.
03.2	2016-06-07	Production	1	Added OPAR to RF table.
03.3	2016-06-15	Production	1	Adjust OPAR information.
04	2018-07-03	Production	All	Converted to Wolfspeed Data Sheet.

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com
919.407.7816

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.