

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


Medical 6W DC-DC Converters

Features

- ◆ Industry Standard DIP-24 Package
- ◆ 9-36V or 18-75VDC Input
- ◆ 5kVAC Isolation (2xMOPPs)
- ◆ 2.5uA Leakage Current
- ◆ Low Off-Load Power Draw



Key Market Segments & Applications



Specifications			
Model		PXC-M06	PXC-M06W
Max Output Power	W		6W
Voltage Accuracy	%		±1%
Voltage Adjustment (T)	%	±10% (-10% +20% on 15V & 24V single output models) (see options table)	
Minimum Load	-		None
Line Regulation	%	Single Output: ±0.2%, Dual Output: ±0.5%	
Load Regulation	%	Single Output: ±0.2%, Dual Output: ±1%	
Cross Regulation	%	±5% (25-100% load)	
Ripple and Noise	-	See table	
Start up time	ms		30ms
Remote on/off	-	See options table	
Temperature Coefficient	%/°C	<±0.02%/°C	
Operating Temperature (1)	°C	-40 to +105°C, derating necessary above 88°C	
Storage Temperature	°C	-55 to 125/°C	
Thermal Shock	-	MIL-STD-810F	
Relative Humidity (non condensing)	%RH	5 to 95%RH	
Transient Response (25% step load change)	µs	< 250µs recovery	
Overvoltage Protection	V	Single Output: 3.3V: 3.7-5V, 5V: 5.6-7V, 12V: 13.5-16V, 15V: 18.3-22V, 24V: 29.1-34.5V Dual Output: 5V: 5.6-7V, 12V: 13.5-18.2V, 15V: 17-22V	
Overcurrent and Short Circuit Protection	%	Typically at 150%, hiccup with self recovery	
Input Surge Voltage (Maximum for 100ms)	V	24V input: 50V, 48V input: 100V	
Isolation Voltage	V	5,000VAC	
Isolation Resistance	Ω	10 ⁹ Ω minimum	
Isolation Capacitance (max)	pF	17pF maximum	
Typical Switching Frequency (Fixed)	kHz	250kHz (±25kHz)	
MTBF (MIL-HDBK-217F)	Hours	4,718,000	
Vibration	-	MIL-STD-810F	
Conducted and Radiated Emissions	-	See Installation Diagrams	
Immunity	-	EN61000-4-2, -3, -4, -5, -6 Pref Criteria A	
Safety Agency Certifications	-	IEC/EN60601-1, ES60601-1, CE Mark	
Size (L x W x H)	mm(″)	31.8 x 20.3 x 10.2mm (1.25 x 0.8 x 0.4″)	
Weight	g	14g	
Warranty	Yrs	Two Years	

Notes:


See installation manual for full specifications and test measurements.

(1) Convection cooling. See installation manual for forced air ratings.

Model Selector

Model	Output Voltage (V)	Output Current (A)	Output Power (W)	Input Voltage (V)	Input Current No Load (mA)	Efficiency (%)	Ripple & Noise (Pk-Pk mV)	Max Load Capacitance (uF)
Single Outputs								
PXC-M06-24WS3P3-A	3.3	1.8	5.9	9 - 36	6	83.0	30	2100
PXC-M06-48WS3P3-A	3.3	1.8	5.9	18 - 75	4	82.5	30	2100
PXC-M06-24WS05-A	5	1.2	6.0	9 - 36	6	86.0	30	1500
PXC-M06-48WS05-A	5	1.2	6.0	18 - 75	4	86.5	30	1500
PXC-M06-24WS12-A	12	0.5	6.0	9 - 36	6	89.0	40	260
PXC-M06-48WS12-A	12	0.5	6.0	18 - 75	4	88.0	40	260
PXC-M06-24WS15-A	15	0.4	6.0	9 - 36	6	89.0	40	210
PXC-M06-48WS15-A	15	0.4	6.0	18 - 75	4	88.5	40	210
PXC-M06-24WS24-A	24	0.25	6.0	9 - 36	6	88.5	50	75
PXC-M06-48WS24-A	24	0.25	6.0	18 - 75	4	88.0	50	75
Dual Outputs								
PXC-M06-24WD05-A	±5	±0.6	6.0	9 - 36	6	85.0	30	±860
PXC-M06-48WD05-A	±5	±0.6	6.0	18 - 75	4	85.0	30	±860
PXC-M06-24WD12-A	±12	±0.25	6.0	9 - 36	6	88.5	40	±150
PXC-M06-48WD12-A	±12	±0.25	6.0	18 - 75	4	88.0	40	±150
PXC-M06-24WD15-A	±15	±0.2	6.0	9 - 36	6	88.5	40	±110
PXC-M06-48WD15-A	±15	±0.2	6.0	18 - 75	4	87.0	40	±110

Outline Drawing, Pinout Style A

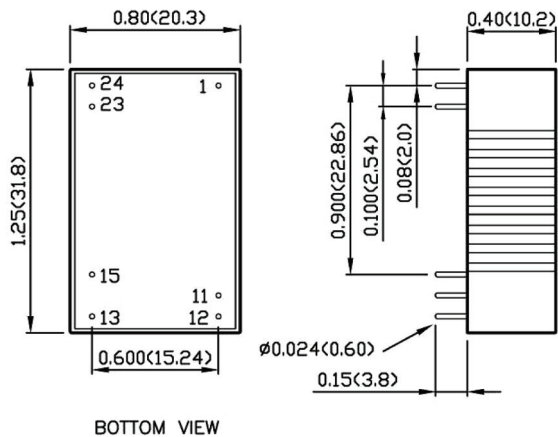

BOTTOM VIEW

Options

-A	Pinout style A (Standard Version)
No suffix	Pinout style B (No remote on/off & no trim pin)
-P	Pinout style B (Positive remote on/off & no trim pin)
-T	Pinout style B (Trim pin & no remote on/off)
-PT	Pinout style B (Positive remote on/off & trim pin)

Other DC-DC Products

PX	10 - 60W, 12V, 24V, 48V input DC-DC
CC-E	1.5 - 25W, 5V, 12V, 24V & 48V input DC-DC
i6A	14A, 9-40V input POL
iA, iB, iC, iJ	3 - 60A, 5V & 12V input POL

For Additional Information, please visit us.tdk-lambda.com/lp/products/pxc-m-series.htm



Pinout (Style A)

PIN #	Single Output	Dual Output
1	+ Input	+ Input
11	No pin	Common
12	- Output	No pin
13	+ Output	- Output
15	No pin	+ Output
23	- Input	- Input
24	- Input	- Input

(See website for Pinout Style B)