mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.


We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



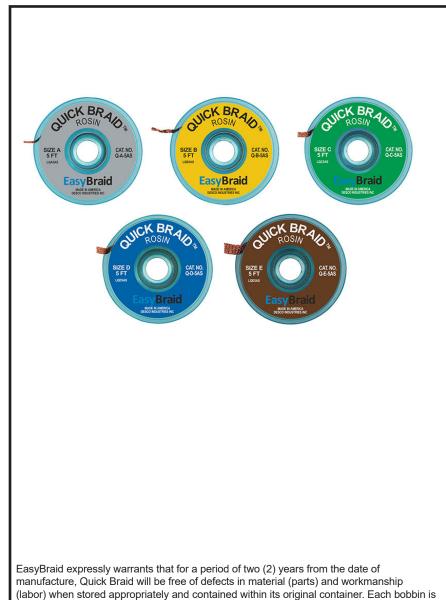

individually stamped with a lot code. A certificate of compliance is available on our website.

Features:

- Used in the rework and repair of printed circuit boards, computers, cell phones, or other electronics
- · Easily removes solder from components or pads on a circuit board
- Concentrated fine copper braiding utilizes less length of wick for each desoldering application
- Made of clean, oxide-free copper wire
- · Tight weave enables quick "on and off" desoldering
- 5' and 10' lengths available on static dissipative bobbins in compliance with ESD Association Standard
- Leaves a residue that is environmentally safe

Wire Specifications:

Wire Type	Width	Configuration
A Wire	0.025" (±0.003") .635mm (±0.8mm)	2 strands of 42awg X 16 (total 32 strands), 31 PPI
B Wire	0.050" (±0.004") 1.27mm (±1.0mm)	4 strands of 42awg X 16 (total 64 strands), 12.5 PPI
C Wire	0.075" (±0.005") 1.90mm (±1.3mm)	6 strands of 42awg X 16 (total 96 strands), 16 PPI
D Wire	0.095" (±0.007") 2.41mm (±1.8mm)	5 strands of 42awg X 24 (120 total strands), 19 PPI
E Wire	0.117" (±0.008") 2.97mm (±2.0mm)	5 strands of 40awg X 24 (120 total strands), 16 PPI

Bobbin Identification:

PHONE: (952) 929-3040

WEBSITE: EASYBRAIDCO.COM

Width	Color Code	Letter Signifier
.025"	Gray	А
.050"	Yellow	В
.075"	Green	С
.100"	Blue	D
.125"	Brown	E

QUICK BRAID DESOLDERING BRAID

11543 K-TEL DRIVE, MINNETONKA, MN 55343



DATE:

August

2018

DRAWING

NUMBER

Quick Braid

Specifications and procedures subject to change without notice.



© 2018 DESCO INDUSTRIES INC Employee Owned