



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**QT-Brightek Lamp Series**

**5mm IR Lamp LED**

**Part No.: QBED8340**

Product: QBED8340	Date: March 27, 2014	Page 1 of 7
	Version# 1.0	

---

**Table of Contents:**

Introduction .....	3
Electrical / Optical Characteristic (Ta=25 °C) .....	4
Absolute Maximum Rating .....	4
Characteristic Curves.....	5
Packing .....	6
Labeling .....	6
Ordering Information .....	6
Revision History .....	7
Disclaimer .....	7

## Introduction

**Feature:**

- Water clear lens
- Package in bulk
- High radiant intensity
- Peak wavelength  $\lambda_p=850\text{nm}$
- 40 degree viewing angle

**Description:**


This device is spectrally match with phototransistor, photodiode, and infrared receiver module

**Application:**

- Free air transmission system
- Optoelectronic switch
- Infrared applied system
- Smoke Detector

**Certification & Compliance:**

- TS16949
- ISO9001
- RoHS Compliant

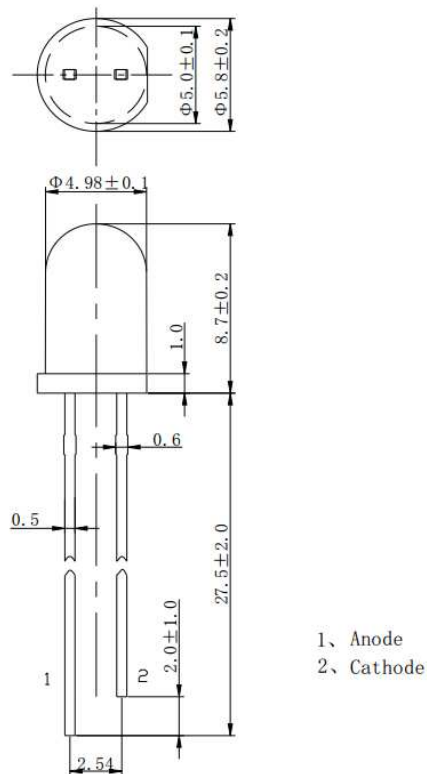**Dimension:**

Units: mm / tolerance = +/-0.2mm


**Electrical / Optical Characteristic (Ta=25 °C)**

Parameter	Symbol	Test Condition	Output			Units
			Min.	Typ.	Max.	
Forward Voltage	$V_F$	$I_F=50\text{mA}$	-	1.4	1.60	V
Pulse Forward Voltage	$V_{FP}$	$I_{FP}=700\text{mA}, t_p=10\mu\text{s}$	-	-	3.50	
Reverse Current	$I_R$	$V_R=5\text{V}$	-	-	10	$\mu\text{A}$
Radiant Intensity	$I_E$	$I_F=50\text{mA}$	30	45	-	mW/sr
		$I_F=100\text{mA}, t=20\text{ms}$	60	80	-	
Peak Radiation Wavelength	$\lambda_P$	$I_F=50\text{mA}$	-	850	-	nm
Half Spectrum Width	$\Delta\lambda$	$I_F=50\text{mA}$	-	40	-	nm
Viewing Angle	$2\Theta_{1/2}$	$I_F=50\text{mA}$	-	40	-	deg
Switch Time	$t_r/t_f$	$I_{FP}=100\text{mA}, f=1\text{KHz}, t_p/T=1\%$	-	25/15	-	ns


**Absolute Maximum Rating**

Parameter	Symbol	Rating	Units
Continuous Forward Current	$I_F$	100	mA
Peak Forward Current	$I_{FP}$	1	A
Reverse Voltage	$V_R$	5	V
Power Dissipation at (or below) 25 °C Free Air Temperature	$P_d$	120	mW
Operating Temperature	$T_{opr}$	-25 ~ +85	°C
Storage Temperature	$T_{stg}$	-40 ~ +100	°C


**Characteristic Curves**

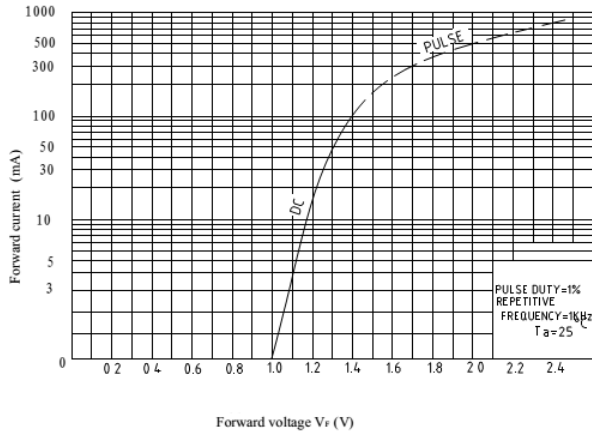


**Fig.1 Forward Current vs. Forward Voltage**

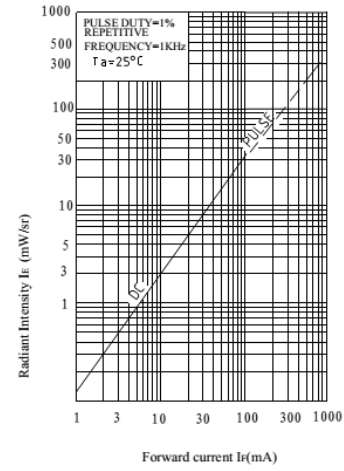


**Fig.2 Radiant Intensity vs. Forward Current**

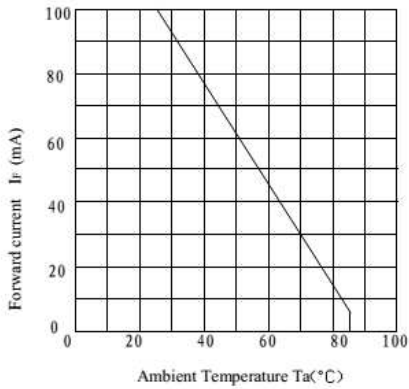


**Fig.3 Forward Current vs. Ambient Temperature**

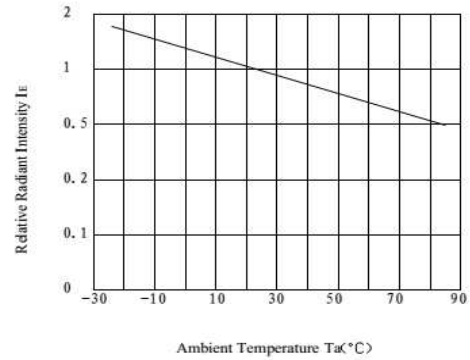

**Fig.4 Relative Radiant Intensity vs. Ambient Temperature**

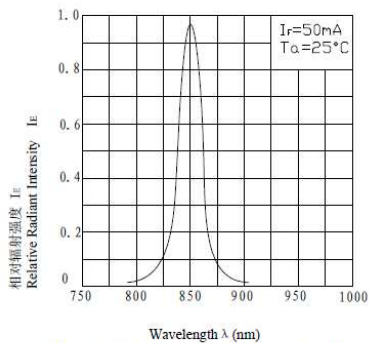

**Fig.5 Relative Radiant Intensity vs. Wavelength**

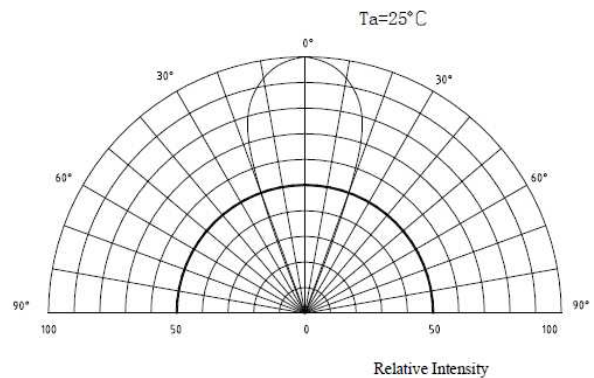

**Fig.6 Relative Radiant Intensity vs. Angular Displacement**

**Packing**

500pcs per bag

**Labeling**

Part No: \_\_\_\_\_

Customer P/N: \_\_\_\_\_

Item: \_\_\_\_\_

Q'ty: \_\_\_\_\_

Vf: \_\_\_\_\_

Iv: \_\_\_\_\_

WI: \_\_\_\_\_

Date: \_\_\_\_\_

**Made in China****Ordering Information**

Part #	Orderable Part #	Spec Range	Quantity per bag
QBED8340	QBED8340	I <sub>e</sub> =80mW mW/sr. @ I <sub>F</sub> =100mA, t=20ms / λ <sub>P</sub> =850nm typ.	500pcs

**Revision History**

Description:	Revision #	Revision Date
New Release of QBED8340	V1.0	03/27/2014

**Disclaimer**

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

**Life Support Policy**

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.