



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



QT-Brightek High Power Series

10W High Power UV LED

Part No.: QBHP6868E-UVXXXK

**XXX: UV Wavelength
K: Single Chip**

Product: QBHP6868E-UVXXXK	Date: March 25, 2016	Page 1 of 9
	Version# 1.1	

Table of Contents:

Introduction	3
Electrical / Optical Characteristic (Ta=25 °C)	4
Absolute Maximum Rating	4
Characteristic Curves.....	5
IR Reflow Soldering Profile	6
Packing	7
Labeling	7
Caution	8
Ordering Information.....	8
Revision History	9
Disclaimer	9

Introduction

Feature:

- 10W High Power UV LED
- Glass lens
- Packed in tape and reel
- ESD rating: 8KV (HBM)
- Viewing Angle: 60° typ.

Description:

This 10W high power UV LED has compact size of 6.8 x 6.8mm. It is ideal for curing or any type of sterilization application.

Application:



- UV curing
- UV marking
- Purification
- Inspection
- Sterilization and Disinfection

Certification & Compliance:

- TS16949
- ISO9001
- RoHS Compliant



Dimensions:

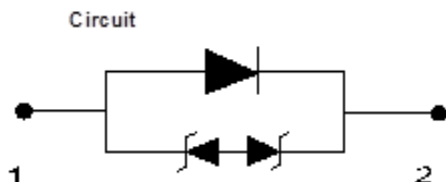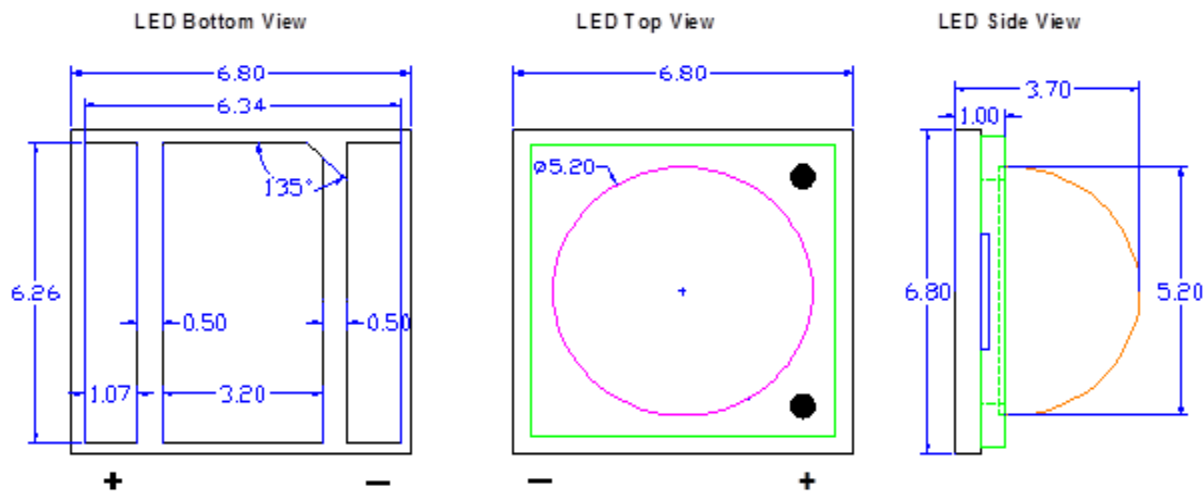

Units: mm / tolerance = +/-0.1mm

Electrical / Optical Characteristic (Ta=25 °C)

Part Number	Color	I _F (mA)	V _F (V)			λ _p (nm)			P _o (mW)		
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
QBHP6868E-UV365K	UV	2000	3.4	3.8	4.2	365	367	370	1000	1200	1400
QBHP6868E-UV385K	UV	2000	3.4	3.8	4.2	380	385	390	1400	1600	1800
QBHP6868E-UV395K	UV	2000	3.4	3.8	4.2	390	395	400	1400	1600	1800

Absolute Maximum Rating

Material	P _d (W)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	T _{SO L} (°C)
InGaN	8.4	2000	2500	5	-40 to +80	-40 to +100	260

*Duty 1/10 @ 10ms Pulse Width

Forward Voltage V_F @ I_F=2000mA

Bin	Min.	Max.	Unit
A1	3.4	3.8	V
A2	3.8	4.2	

Radiometric Power P_O for UV365K @ I_F=2000mA

Bin	Min.	Max.	Unit
P10	1000	1100	mW
P11	1100	1200	
P12	1200	1300	
P13	1300	1400	

Radiometric Power P_O for UV385K & UV395K @ I_F=2000mA

Bin	Min.	Max.	Unit
P15	1400	1500	mW
P16	1500	1600	
P17	1600	1700	
P18	1700	1800	



Tolerance of measurement of forward voltage: ±0.1V

Tolerance of measurement of Radiometric Power: ±15%

Tolerance of measurement of Peak wavelength: ±2nm


Characteristic Curves

Typical Spatial Distribution

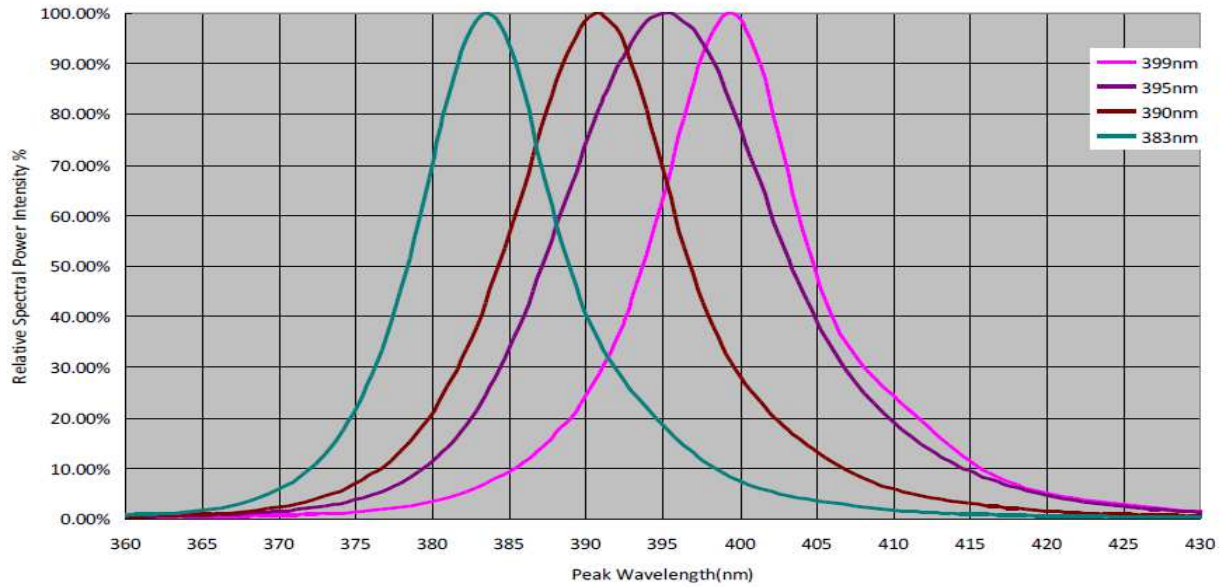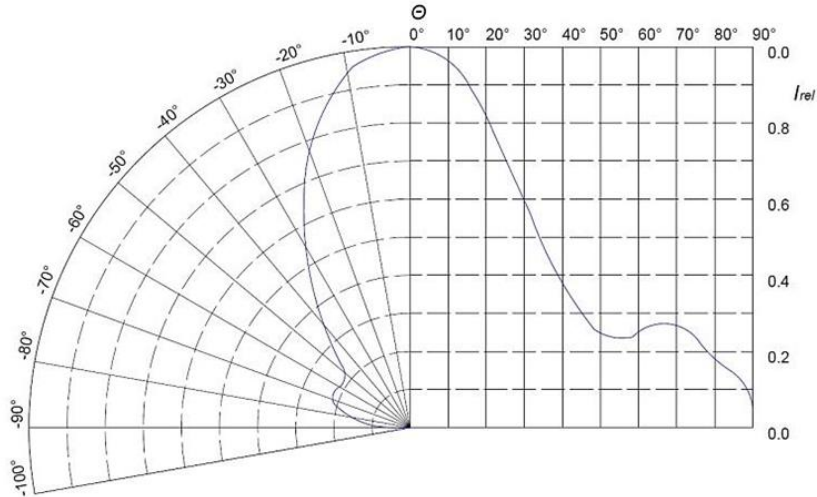

IR Reflow Soldering Profile



Lead Free solder

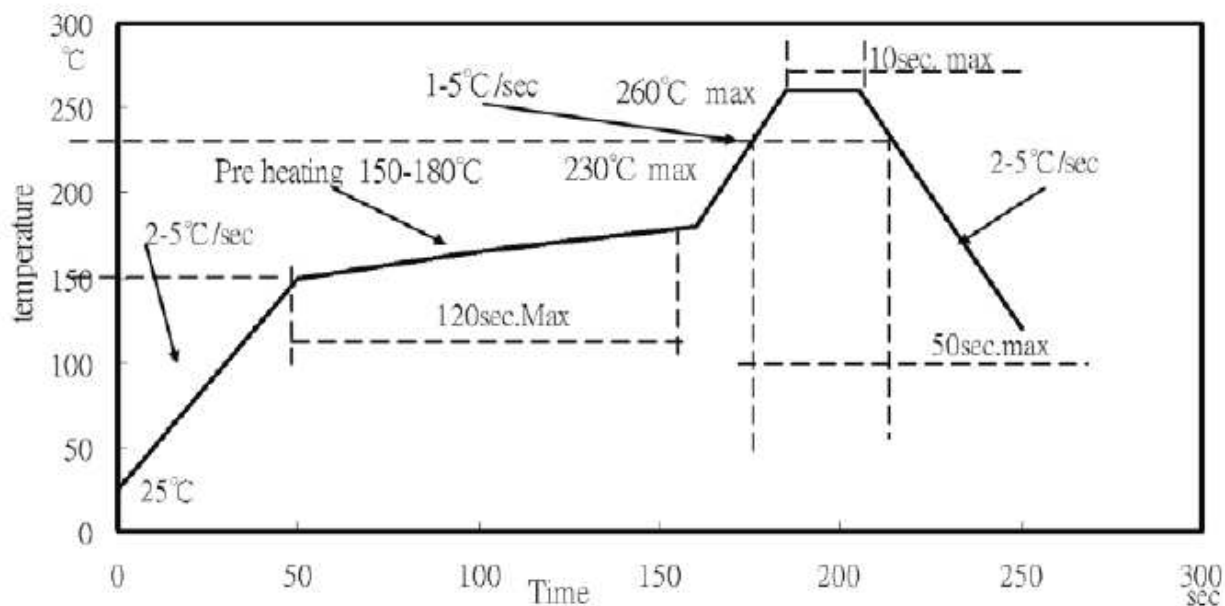

Recommended Soldering Pad:

**RECOMMENDED STENCIL PATTERN
(HATCHED AREA IS OPENING)**



RECOMMENDED PCB SOLDER PAD

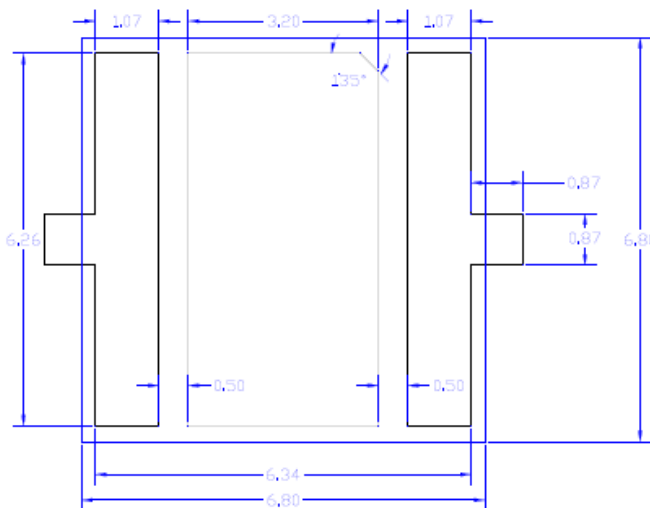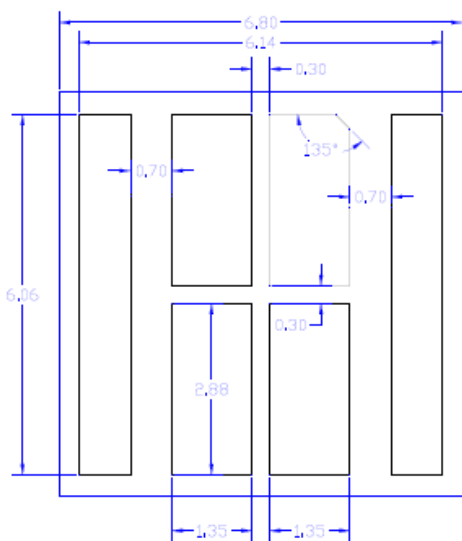

Unit: mm

Packing

Tape and Reel:

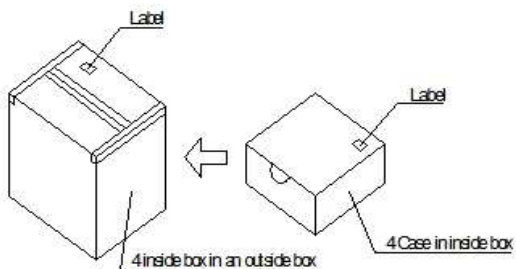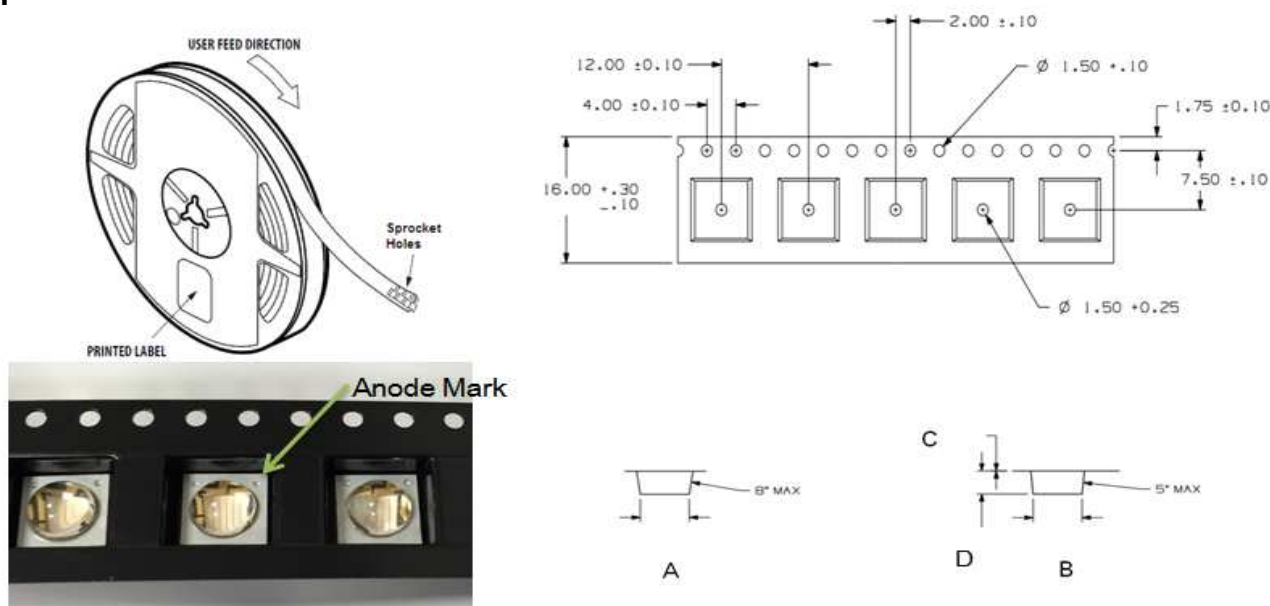

Item	Dimension	Tolerance	Unit
A	7.35	±0.10	mm
B	7.25	±0.10	mm
C	0.33	±0.02	mm
D	4.35	±0.10	mm

Unit: mm

Labeling



Part No: _____

Customer P/N: _____

Item: _____

Q'ty: _____

Vf: _____



Iv: _____

WI: _____

Date: _____

Made in Taiwan

Caution

	 <h1 style="margin: 0;">CAUTION</h1>
	<ul style="list-style-type: none"> • This UV LED during operation radiates intense UV light. • Do not look directly into the UV light during operation of the device. This can be harmful to the eyes even for brief period due to the intense UV light. • If viewing the UV light is necessary, please use UV filtered glasses to avoid damage by the UV light. • If the UV LED in your product might be viewed directly, please affix a caution label to your product to that effect. <p style="text-align: center;"> Avoid direct eye exposure to UV light Keep out of reach of children </p>

Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per reel
QBHP6868E-UV365K	QBHP6868E-UV365K	P _o =1200mW typ. @ I _F =2000mA, λ _p =365nm to 370nm	350 units
QBHP6868E-UV385K	QBHP6868E-UV385K	P _o =1600mW typ. @ I _F =2000mA, λ _p =380nm to 390nm	350 units
QBHP6868E-UV395K	QBHP6868E-UV395K	P _o =1600mW typ. @ I _F =2000mA, λ _p =390nm to 400nm	350 units

Revision History

Description:	Revision #	Revision Date
New Release of QBHP6868E-UVXXXK	V1.0	01/29/2016
Add measurement tolerance info	V1.1	03/25/2016

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.