



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



QT-Brightek Chip LED Series

SMD 0606 RGB LED

Part No.: QBLP600-RIB

Table of Contents:

| | |
|--|----|
| Introduction | 3 |
| Electrical / Optical Characteristic (Ta=25 °C) | 4 |
| Absolute Maximum Rating | 4 |
| Characteristic Curves..... | 6 |
| Solder Profile & Footprint..... | 7 |
| Packing | 8 |
| Labeling | 9 |
| Ordering Information | 9 |
| Revision History | 10 |
| Disclaimer | 10 |

Introduction

Feature:

- Water clear lens
- Package in tape and reel
- Ultra bright 0606 LED package
- AlInGaP technology for R
- InGaN technology for IB

Description:

These ultra bright 0606 RIG LEDs have a height profile of 0.80mm. Combination of high brightness output and small footprint, these LEDs are ideal for keypad backlighting, status indication, and color mixing applications.

Application:



- Status indication
- Back lighting application

Certification & Compliance:

- TS16949
- ISO9001
- RoHS Compliant



Dimension:

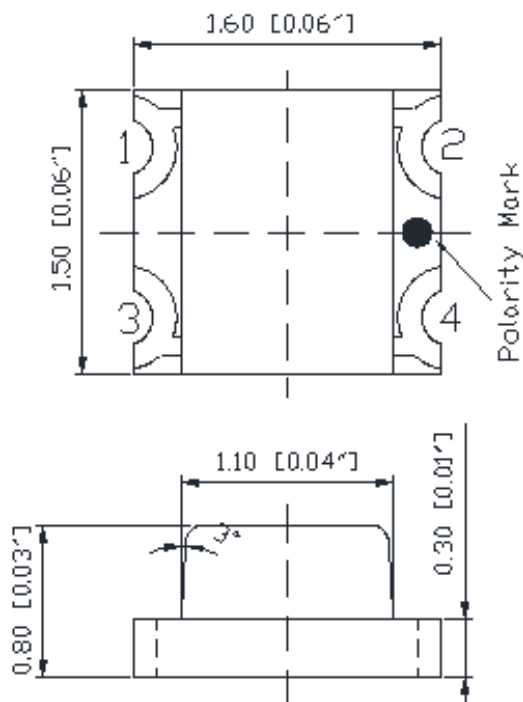

Units: mm / tolerance = +/-0.1mm

Electrical / Optical Characteristic (Ta=25 °C)

| Product | Color | I _F (mA) | V _F (V) | | λ _D (nm) | | | I _V (mcd) | |
|-------------|-------|---------------------|--------------------|-----|---------------------|------|-----|----------------------|------|
| | | | Typ. | Max | Min | Typ. | Max | Min | Typ. |
| QBLP600-RIB | Red | 20 | 2.0 | 2.5 | 630 | 640 | 650 | 40 | 55 |
| | Blue | 20 | 3.1 | 3.7 | 465 | 470 | 475 | 80 | 110 |

Absolute Maximum Rating

| Material | P _d (mW) | I _F (mA) | I _{FP} (mA)* | V _R (V) | T _{OP} (°C) | T _{ST} (°C) | T _{SO L} (°C)** |
|-------------|---------------------|---------------------|-----------------------|--------------------|----------------------|----------------------|--------------------------|
| AlInGaP (R) | 75 | 30 | 125 | 5 | -40 ~ + 80 | -40 ~ +85 | 260 |
| InGaN (IB) | 111 | 30 | 125 | 5 | -40 ~ + 80 | -40 ~ +85 | 260 |

*Duty 1/8 @ 1KHz

**IR Reflow for no more than 10 sec @ 260 °C

Forward Voltage V_F for AlInGaP @ I_F=20mA

| Bin | Min. | Max. | Unit |
|-----|------|------|------|
| □ | 1.7 | 2.5 | V |

Forward Voltage V_F for InGaN @ I_F=20mA

| Bin | Min. | Max. | Unit |
|-----|------|------|------|
| f | 2.8 | 3.1 | V |
| g | 3.1 | 3.4 | |
| h | 3.4 | 3.7 | |

Luminous Intensity I_v @ $I_F=20\text{mA}$

| Bin | Min. | Max. | Unit |
|-----|------|------|------|
| F | 40 | 50 | mcd |
| G | 50 | 63 | |
| H | 63 | 80 | |
| I | 80 | 100 | |
| J | 100 | 125 | |
| K | 125 | 160 | |
| L | 160 | 200 | |







Dominant Wavelength λ_D for Red @ $I_F=20\text{mA}$

| Bin | Min. | Max. | Unit |
|-----|------|------|------|
| v | 630 | 635 | nm |
| w | 635 | 650 | |

Dominant Wavelength λ_D for Blue @ $I_F=20\text{mA}$


| Bin | Min. | Max. | Unit |
|-----|-------|-------|------|
| G | 465 | 467.5 | nm |
| H | 467.5 | 470 | |
| I | 470 | 472.5 | |
| J | 472.5 | 475 | |

Characteristic Curves

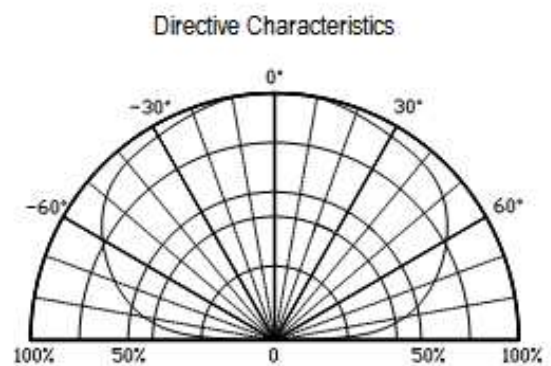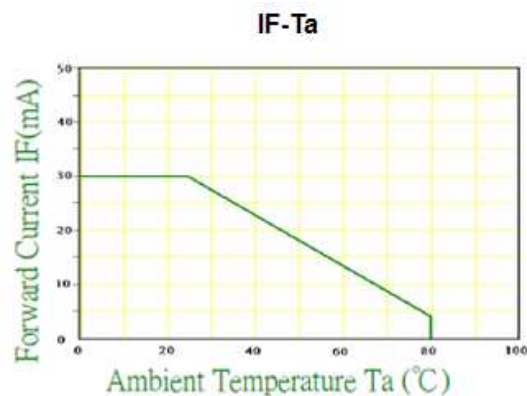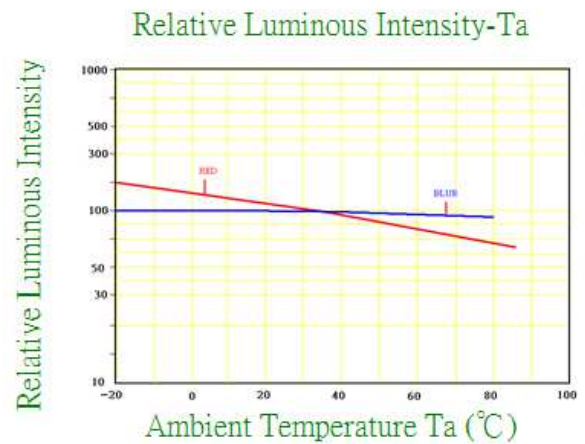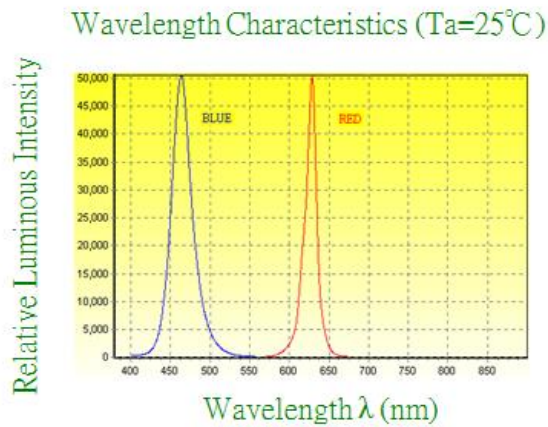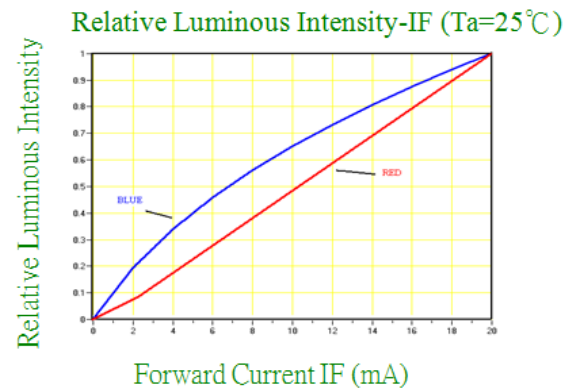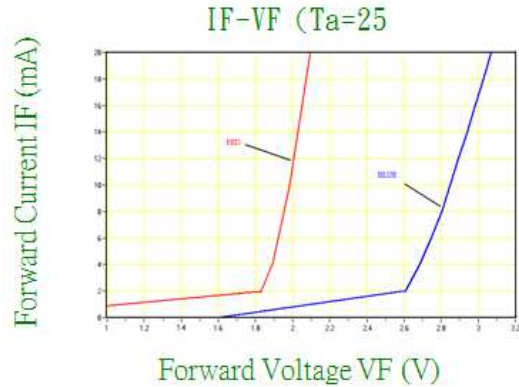


Solder Profile & Footprint

-The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

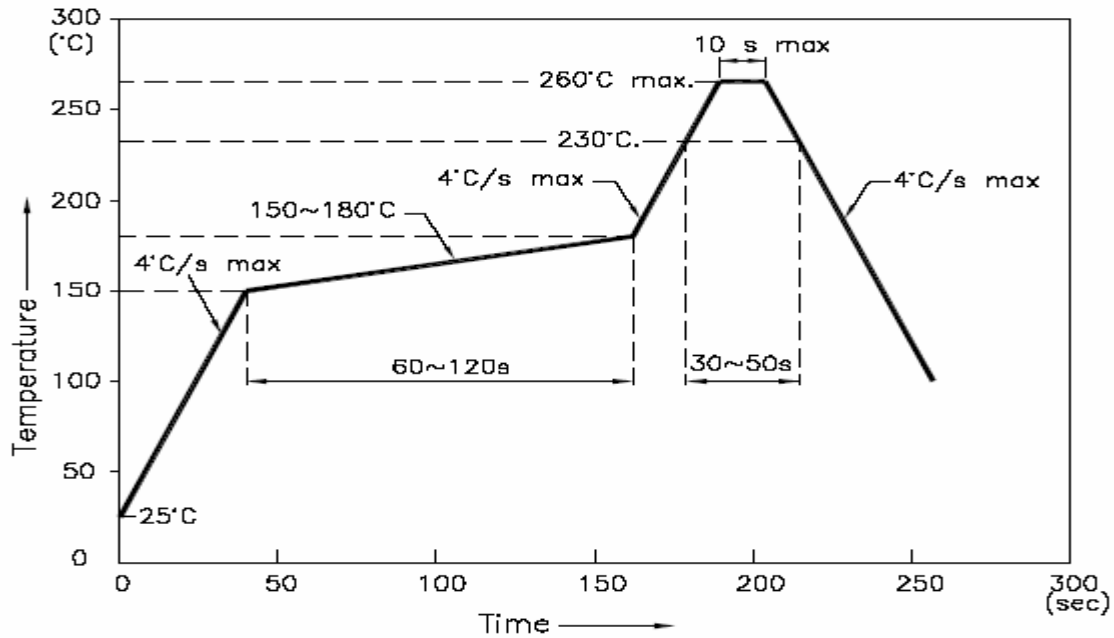

Recommended Pad Layout

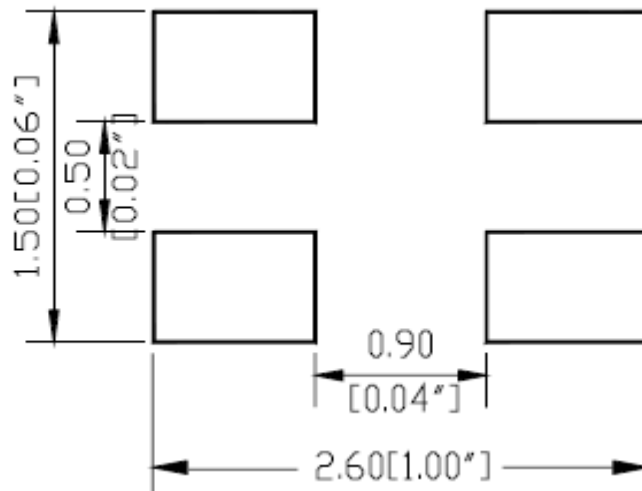


Units: mm

Tolerance: $\pm 0.1\text{mm}$


Packing

Reel Dimension:

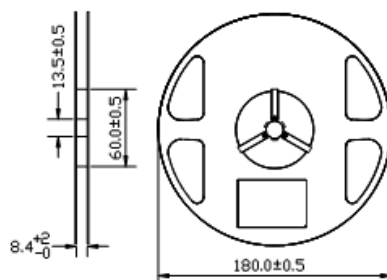


Unit: mm

Tape Dimension:

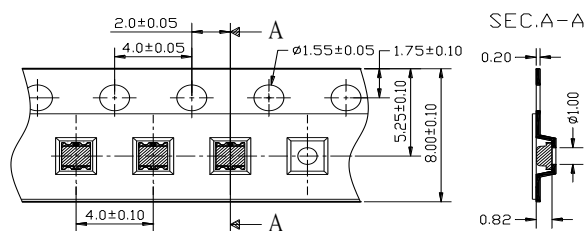


Unit: mm

Arrangement of Tape:

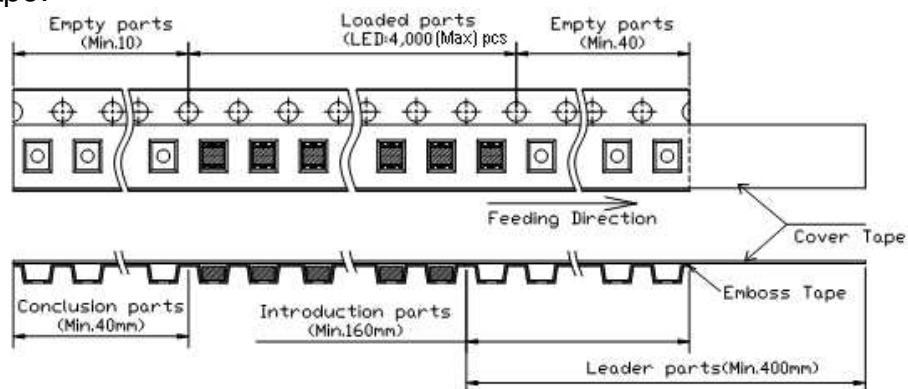

Packaging Specification:

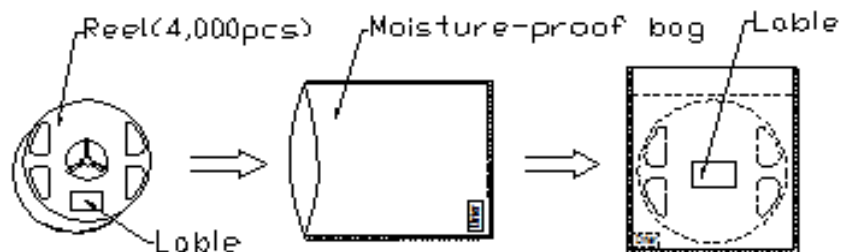

Labeling



Part No: _____

Customer P/N: _____

Item: _____

Q'ty: _____

Vf: _____

Iv: _____

WI: _____

Date: _____

Made in China

Ordering Information

| Part # | Orderable Part # | Spec Range | Quantity per reel |
|-------------|------------------|--|-------------------|
| QBLP600-RIB | QBLP600-RIB | Red: Iv=55mcd typ. @ I _F =20mA, λ _D =630nm to 650nm | 4,000 units |
| | | Blue: Iv=110mcd typ. @ I _F =20mA, λ _D =465nm to 475nm | |

Revision History

| Description: | Revision # | Revision Date |
|---------------------------------------|------------|---------------|
| New Release of QBLP600-RIB | V1.0 | 06/25/2011 |
| Update Spec | V1.1 | 12/09/2011 |
| Update to new format / Update drawing | V2.0 | 06/20/2016 |
| | | |
| | | |
| | | |
| | | |

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.