



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



QT-Brightek PLCC6 Series

PLCC6 RGB LED

Part No.: QBLP679-RGB

Table of Contents:

Introduction3

Electrical / Optical Characteristic (Ta=25 °C)4

Absolute Maximum Rating4

Characteristic Curves.....6

Solder Profile & Footprint.....7

Packing8

Labeling9

Ordering Information9

Revision History10

Disclaimer10

Introduction

Feature:

- Diffused lens
- Package in tape and reel
- Ultra bright PLCC6 RGB LED
- Direct Drive
- InGaN technology for IB/IG
- AlInGaP technology for R
- 120 degree viewing angle
- Black Face

Description:

This ultra bright PLCC6 RGB LED has a height profile of 1.60mm. Combination of high brightness output and direct drive capability, these LEDs are ideal for architecture lighting, status indication, and color mixing applications.

Application:


- Status indication
- Back lighting application
- Architecture lighting

Certification & Compliance:

- TS16949
- ISO9001
- IEC60529
- RoHS Compliant



Dimension:

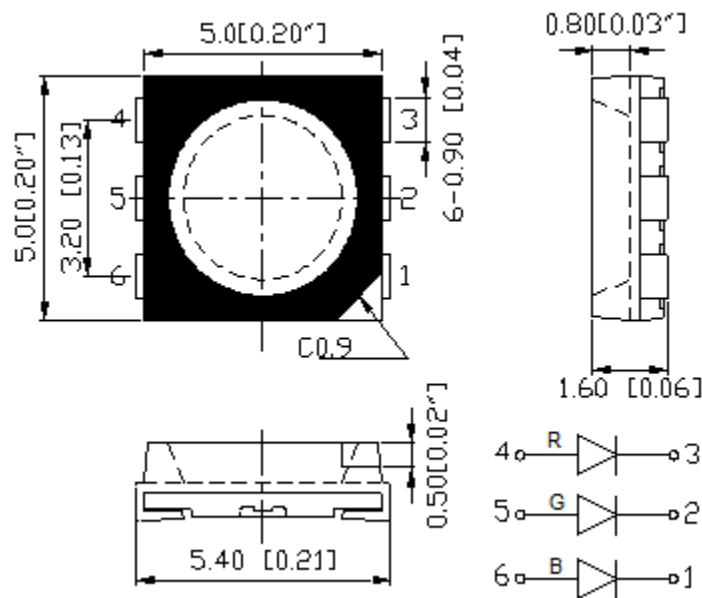

Units: mm / tolerance = +/-0.2mm

Electrical / Optical Characteristic (Ta=25 °C)

Product	Color	I _F (mA)	V _F (V)		λ _D (nm)			I _V (mcd)	
			Typ.	Max.	Min.	Typ.	Max.	Min	Typ.
QBLP679-RGB	Red	20	2.0	2.5	615	620	630	400	630
	True Green	20	3.3	3.7	520	525	530	1000	1500
	Blue	20	3.2	3.7	465	470	475	200	285

Absolute Maximum Rating

Material	P _d (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	T _{SOL} (°C)**	ESD (V)
InGaN (IB/IG)	111	30	125	5	-40 to +80	-40 to +85	260	HBM 2000
AlInGaP (R)	75	30	125	5	-40 to +80	-40 to +85	260	HBM 8000

*Duty 1/8 @ 1KHz

**IR Reflow for no more than 10 sec @ 260 °C

Luminous Intensity I_V for Red @ I_F=20mA

Bin	Min.	Max.	Unit
P	400	500	mcd
Q	500	630	
R	630	800	
S	800	1000	

Luminous Intensity I_V for True Green @ I_F=20mA

Bin	Min.	Max.	Unit
T	1000	1250	mcd
U	1250	1600	
V	1600	2000	
W	2000	2500	

Luminous Intensity I_V for Blue @ I_F=20mA

Bin	Min.	Max.	Unit
M	200	250	mcd
N	250	320	
O	320	400	
P	400	500	

Dominant Wavelength λ_D for Red @ $I_F=20\text{mA}$

Bin	Min.	Max.	Unit
A	615	620	nm
B	620	625	
C	625	630	


Dominant Wavelength λ_D for True Green @ $I_F=20\text{mA}$

Bin	Min.	Max.	Unit
B	520	525	nm
C	525	530	



Dominant Wavelength λ_D for Blue @ $I_F=20\text{mA}$

Bin	Min.	Max.	Unit
B	465	470	nm
C	470	475	


Characteristic Curves

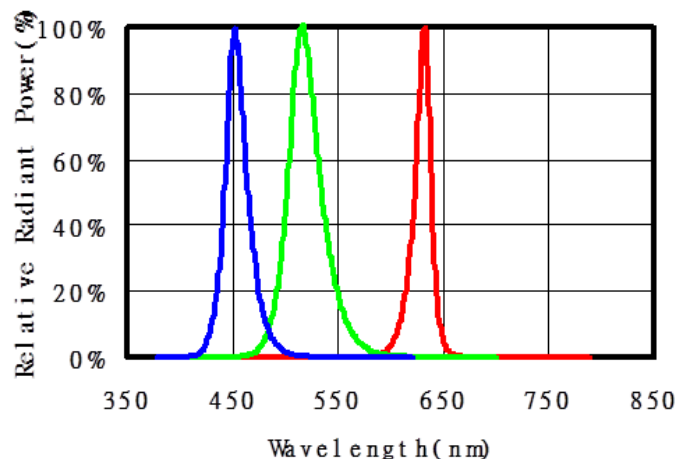 Relative Spectral Power Distribution($T_a=25^{\circ}\text{C}$)


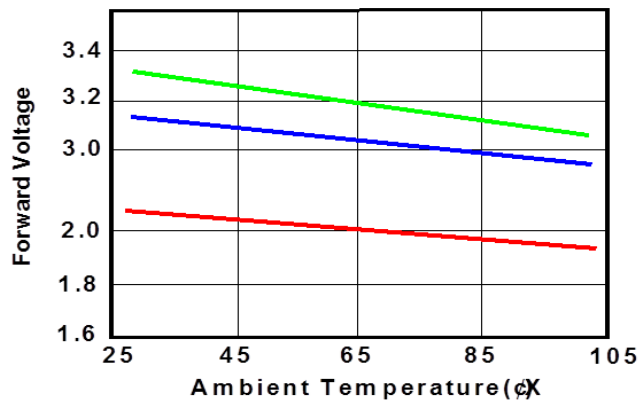
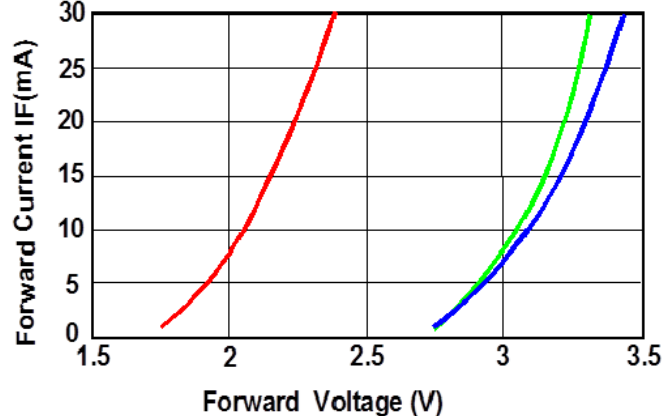
Directive Characteristics

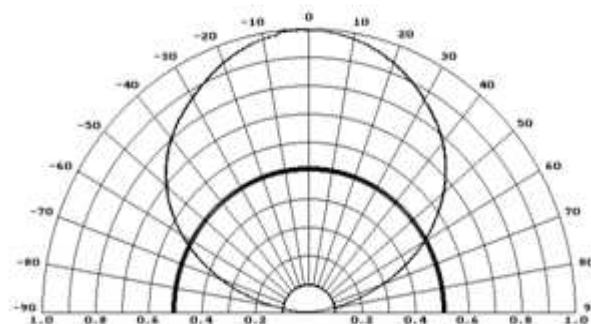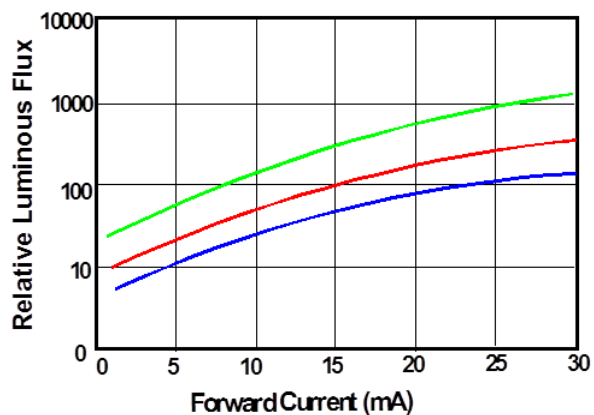
 Relative Flux vs. Current ($T_a=25^{\circ}\text{C}$)


Relative Flux vs. Ambient Temperature

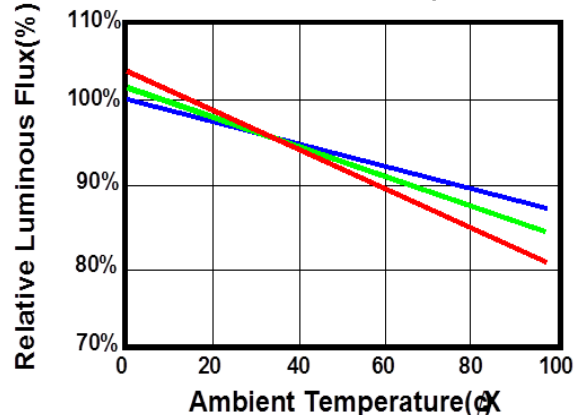


Forward Voltage .Ambient Temperature



 Electrical Characteristics($T_a=25$)


Solder Profile & Footprint

- Recommended tin solder specifications: melting temperature in the range of 178~192 °C
- The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):

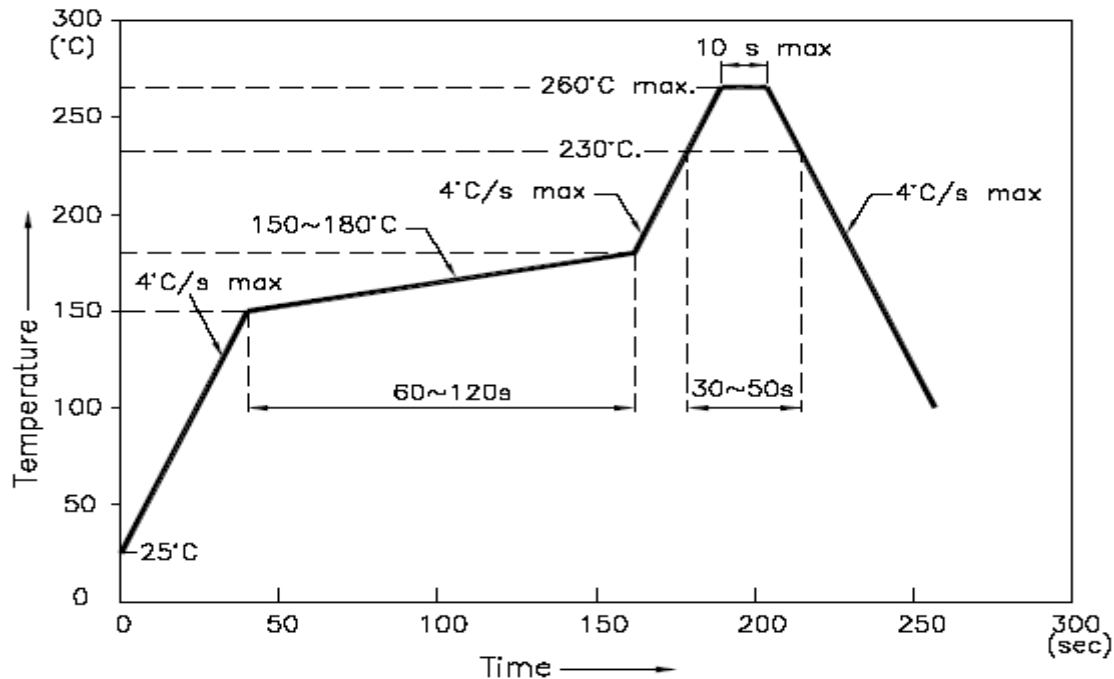

Recommend Pad Layout

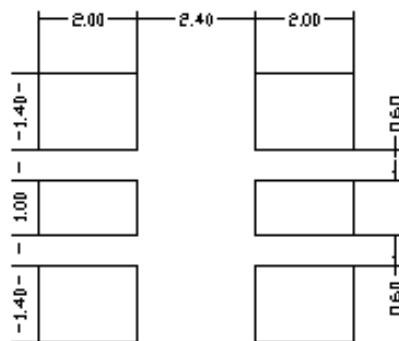


Units: mm

tolerance: +/- 0.2mm


Packing

Reel Dimension:

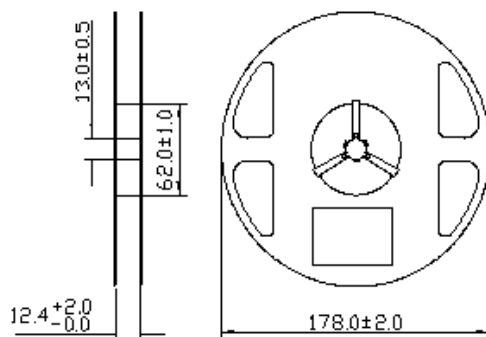


Unit: mm

Tape Dimension:

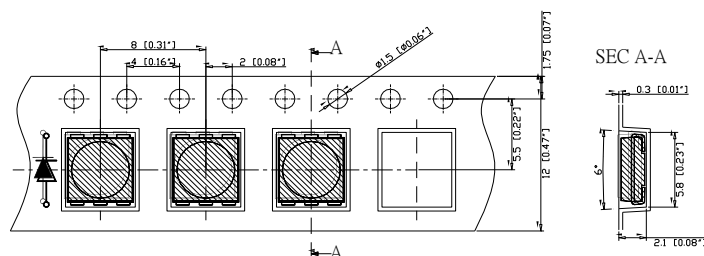


Unit: mm

Arrangement of Tape:

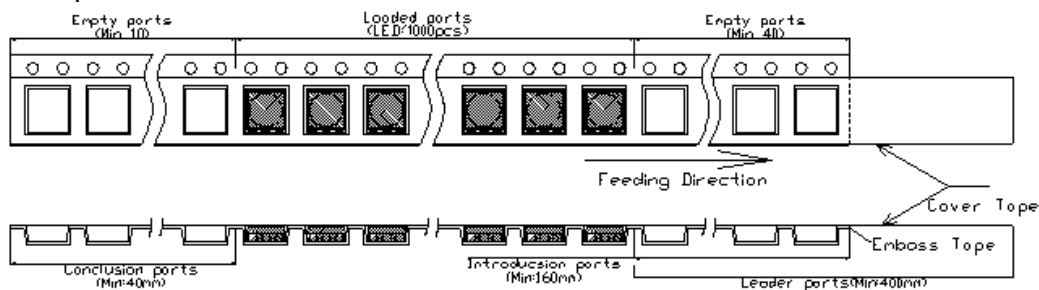

Packaging Specification:

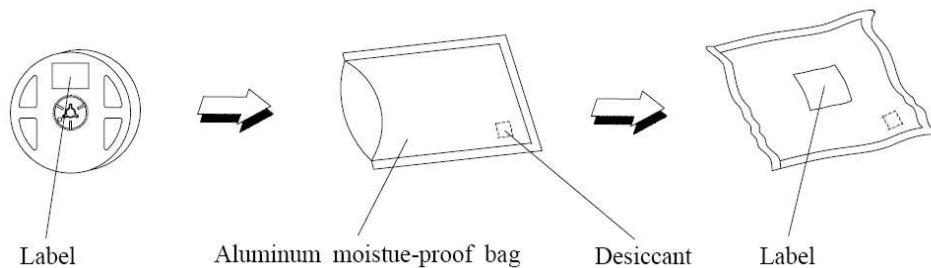

Labeling



Part No: _____

Customer P/N: _____

Item: _____

Q'ty: _____

Vf: _____

Iv: _____

WI: _____

Date: _____

Made in China

Ordering Information

Part #	Orderable Part #	Spec Range	Quantity per reel
QBLP679-RGB	QBLP679-RGB	Red: Iv=630mcd typ. / Color=615nm to 635nm	1000 units
		True Green: Iv=1500mcd typ. / Color=520nm to 530nm	
		Blue: Iv=285mcd typ. / Color=465nm to 475nm	

Revision History

Description:	Revision #	Revision Date
New Release of QBLP678-RGB	V1.0	09/20/2010
Updates –QBLP678-RGB2	V1.1	1/25/2011
Part number Updates – QBLP679 –RGB	V1.2	1/27/2011
Update new format/ amend spec	V1.3	11/13/2013
Update dimension drawing and spec	V2.0	04/23/2014

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.