



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



QT-Brightek Optocoupler Series

4-PIN Long Mini-Flat Phototransistor Optocoupler

Part No.: QT101X-W

Product: QTH217	Date: February 12, 2018	Page 1 of 13
	Version# 1.0	



Table of Contents:


Introduction3
Absolute Maximum Rating4
Electrical Characteristic ($T_A=25\text{ }^\circ\text{C}$).....5
Characteristic Curves.....7
Solder Profile & Footprint.....9
Packing & Labeling11
Device Marking12
Ordering Information12
Revision History13
Disclaimer13

Introduction

Feature:

- High Isolation voltage between input and output (Viso = 5000V rms)
- Extra low coupling capacitance
- Creepage distance > 8mm
- Operating Temperature up to 125 °C
- Long Mini-Flat package.
- -W: White housing package

Schematic:

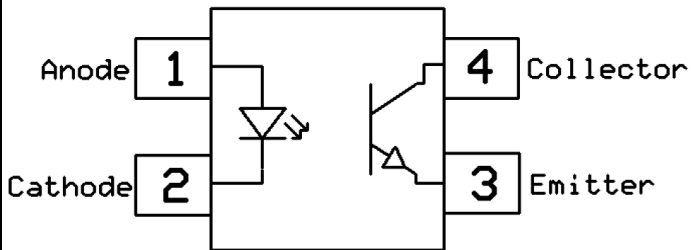


Certification & Compliance:

- Pb free and RoHS Compliant
- UL recognized (File #E338132)
- cUL recognized (File #E338132)
- VDE (Pending Approval)



Dimension: (Dot location indicates pin 1)

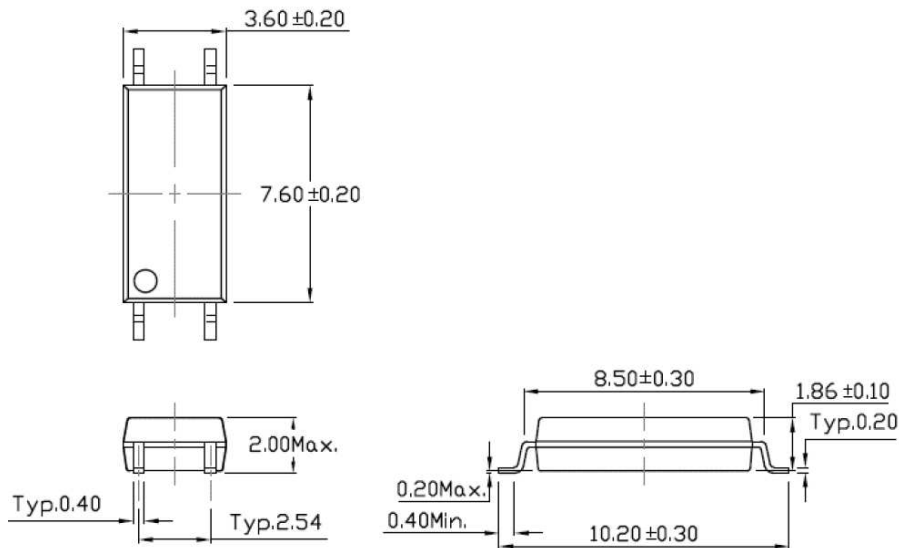

All Dimensions are in mm

Absolute Maximum Rating

Symbol	Parameter	Rating	Units
V _{ISO}	Isolation Voltage	5000	V _{RMS}
T _{STG}	Storage Temperature	-55 ~ +150	°C
T _{OPR}	Operating Temperature	-55 ~ +125	°C
T _{SOL}	Lead Solder Temperature	260 for 10 sec	°C
EMITTER			
I _F	Continuous Forward Current	50	mA
I _{FP}	Peak Forward Current (≤ 1us, 300pps)	1	A
V _R	Reverse Voltage	6	V
P _D	Power Dissipation	85	mW
	Power Dissipation Derated above 100°C	-	mW/°C
DETECTOR			
B _{VCEO}	Collector-Emitter Breakdown Voltage	80	V
B _{VECO}	Emitter-Collector Breakdown Voltage	7	V
I _C	Collector current	50	mA
P _C	Power Dissipation	150	mW

Electrical Characteristic (T_A=25 °C)
Emitter

Symbol	Characteristics	Device	Test Condition	Range			Unit
				Min	Typ	Max	
V _F	Forward Voltage	-	I _F = 10mA	-	1.26	1.4	V
			I _F = 50mA		1.42	1.5	
I _R	Reverse Current		V _R = 6V	-	-	5	uA
C _{IN}	Input Capacitance		f = 1kHz	-	45	-	pF

Detector

Symbol	Characteristic	Device	Test Condition	Range			Unit
				Min	Typ	Max	
B _{VCEO}	Collector-Emitter Breakdown Voltage	-	I _C =0.1mA	80	-	-	V
B _{VECO}	Emitter-Collector Breakdown Voltage	-	I _C =0.1mA	7	-	-	uA
I _{CEO}	Collector-Emitter Dark Current	-	V _{CE} =20V, I _F =0mA	-	-	100	nA


Transfer Characteristics ($T_A=0$ to 70°C unless specified otherwise)


Symbol	Characteristic	Device	Test Condition	Range			Unit
				Min	Typ	Max	
CTR	Current Transfer Ratio	QT1012-W	$I_F = 1\text{mA}, V_{CE}=5\text{V}$	22	-	-	%
		QT1013-W		34	-	-	
		QT1014-W		56	-	-	
		QT1011-W	$I_F = 10\text{mA}, V_{CE}=5\text{V}$	60	-	300	
		QT1012-W		63	-	125	
		QT1013-W		100	-	200	
		QT1014-W		160	-	320	
		QT1010-W	$I_F = 5\text{mA}, V_{CE}=5\text{V}$	50	-	600	
		QT1015-W		50	-	150	
		QT1016-W		100	-	300	
		QT1017-W		80	-	160	
		QT1018-W		130	-	260	
		QT1019-W	200	-	400		
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage		$I_F = 10\text{mA}, I_C=1\text{mA}$	-	-	0.4	V
R_{IO}	Isolation Resistance		$V_{IO}=500\text{V}_{DC}$	5×10^{10}	-	-	Ω
C_{IO}	Isolation Capacitance		$f=1\text{MHz}$	-	1	-	pF

Switching Characteristics ($T_A=25^\circ\text{C}, V_{CC}=5\text{V}$)


Symbol	Characteristic	Device	Test Condition	Range			Unit
				Min	Typ	Max	
T_{ON}	Turn On Time		$I_C=5\text{mA}, V_{CE}=5\text{V}, R_L=100\Omega$	-	4.8	-	us
T_{OFF}	Turn Off Time			-	4.2	-	
t_r	Rise Time			-	2.8	-	
t_f	Fall Time			-	4	-	

Characteristic Curves

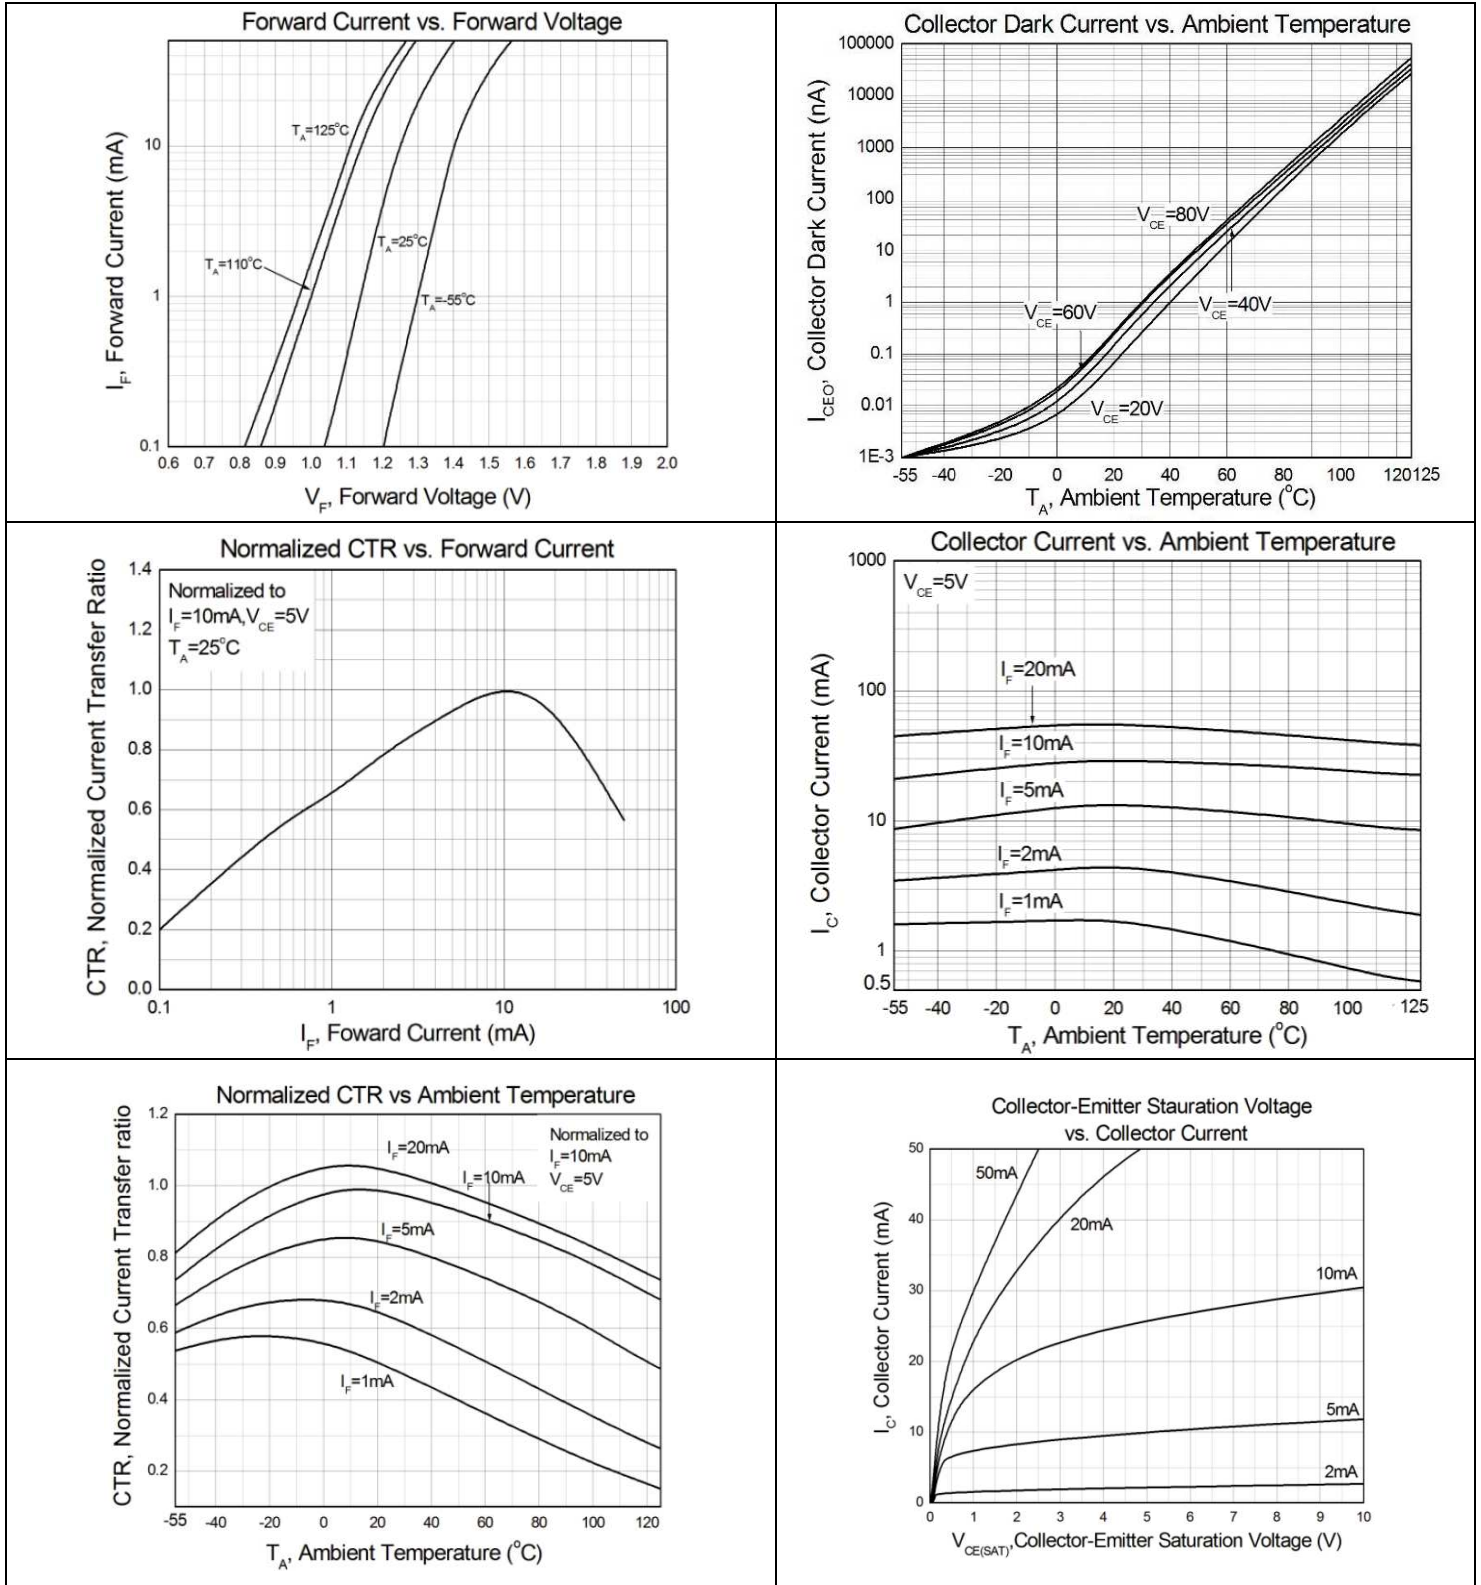

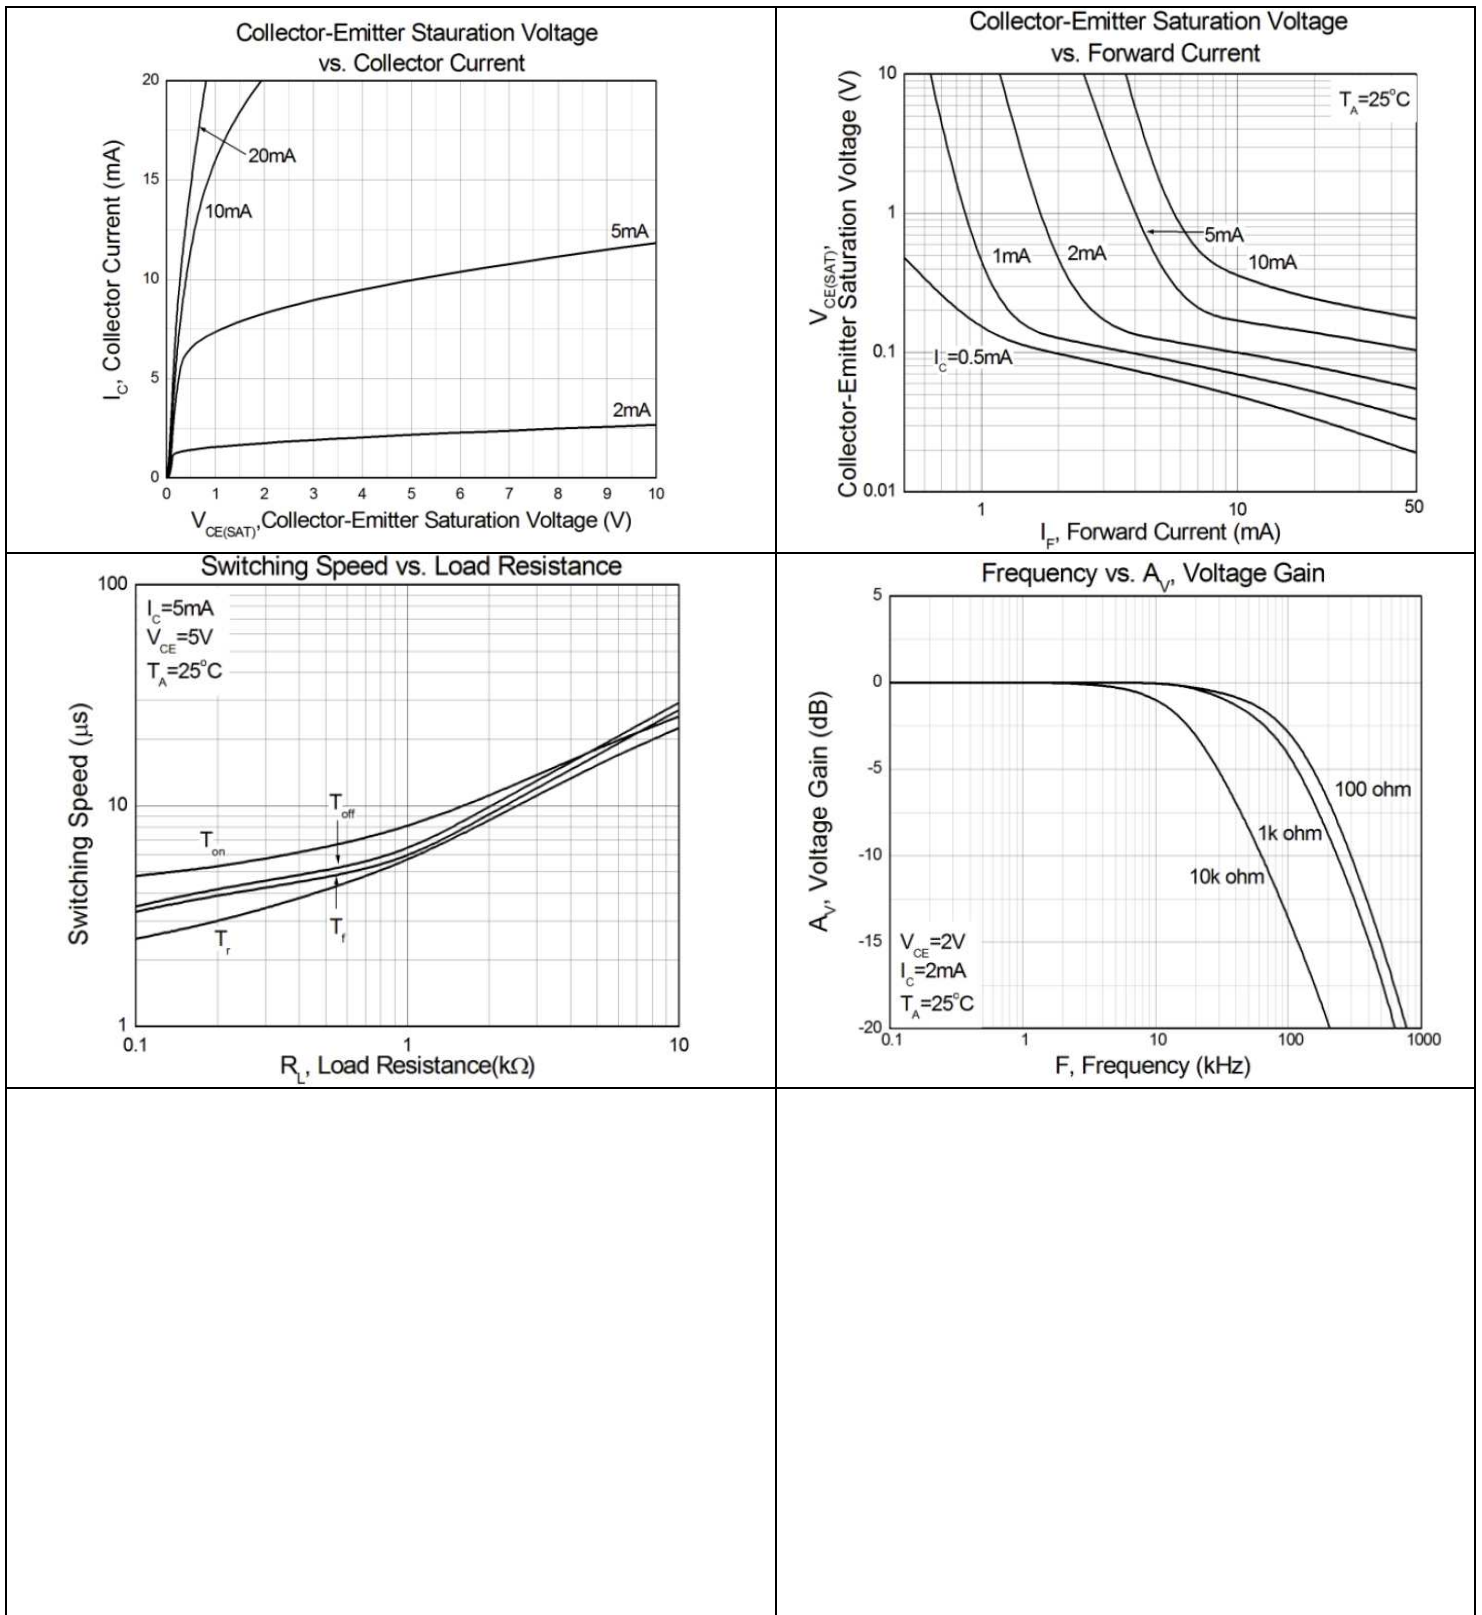

Solder Profile & Footprint

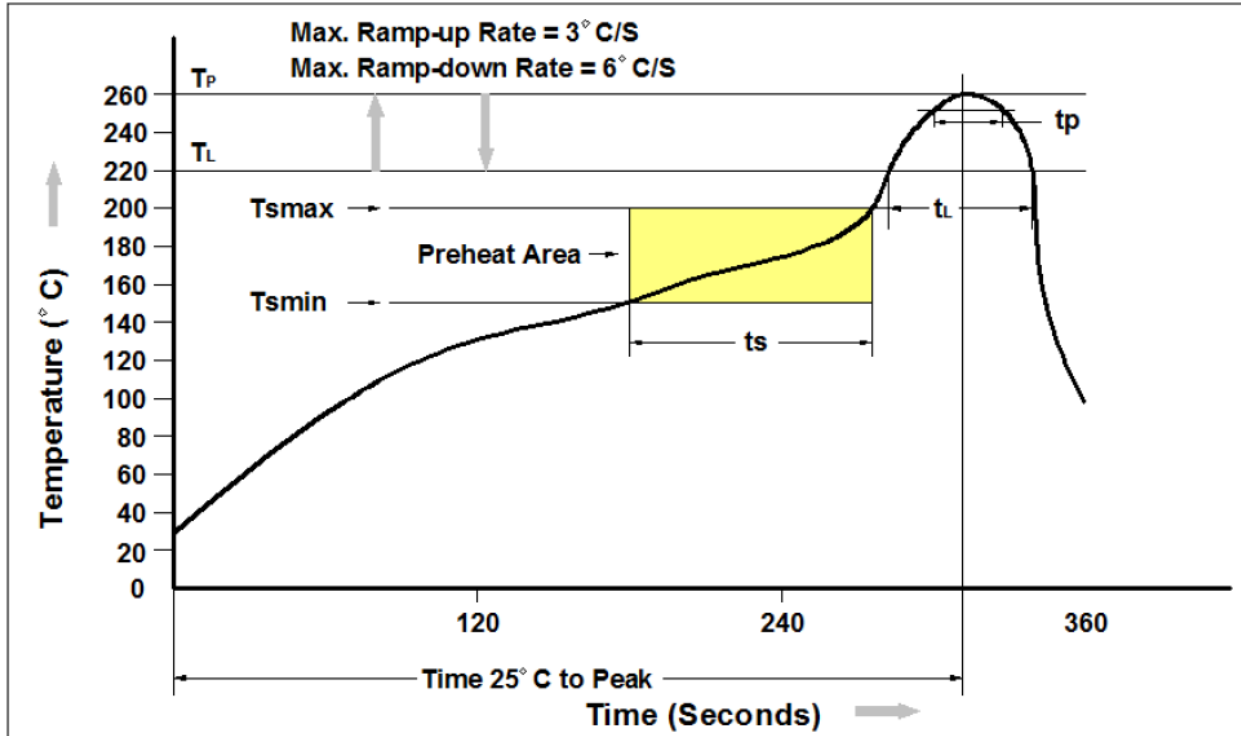


Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	150°C
Temperature Max. (T _{smax})	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds
Ramp-up Rate (t _L to t _p)	3°C/second max.
Liquidous Temperature (T _L)	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t _p) within 5°C of 260°C	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.




Packing & Labeling

Tape Dimension:

Option T1

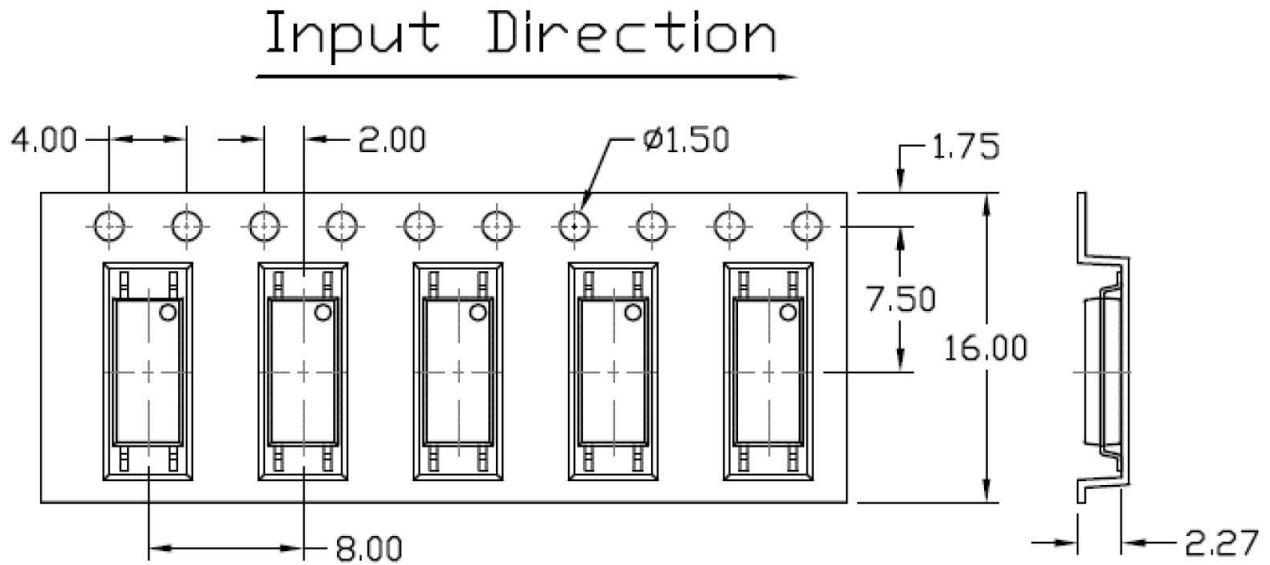

Option T2

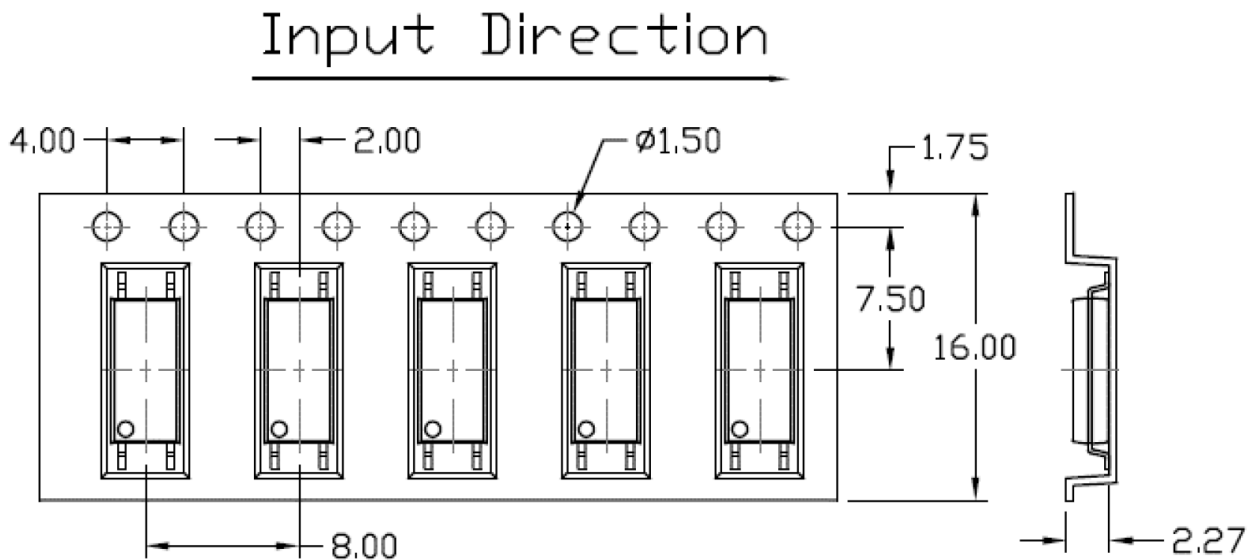

Device Marking

QT = QT-Brightek Corporation
 1019 = part number
 Y = Year
 WW = Week
 V = VDE Option
 K = Manufacturing code

Ordering Information

QT101X(V)(Y)-W
 X = Part number (X=1,2,3,4,5,6,7,8,9)
 V = VDE option (V or None)
 Y = Tape and reel option (T1 or T2)

Option	Description	Quantity
T1	Surface Mount Lead Forming – with Option 1 Taping	3000 pcs/ reel
T2	Surface Mount Lead Forming – with Option 2 Taping	3000 pcs/ reel



Revision History

Description:	Revision #	Revision Date
Initial release of QT101X-W	1.0	02/12/2018

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.