



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



QT-Brightek Optocoupler Series

5-PIN 10 Mbit/s High Speed Logic Gate Optocoupler

Part No.: QTM600, 601, 611



Table of Contents:

Introduction3
Absolute Maximum Rating4
Electrical Characteristic (T_A=25 °C).....5
Characteristic Curves.....7
Test Circuits9
Solder Profile & Footprint11
Packing & Labeling13
Device Marking14
Ordering Information14
Revision History15
Disclaimer15

Introduction


Feature:

- High Speed 10Mbit/s
- High Isolation voltage between input and output (Viso = 3750V rms)
- Guaranteed CTR performance from 0 °C to 70 °C
- Mini-Flat package


Certification & Compliance:

- Pb free and RoHS Compliant
- UL recognized (File #E338132)
- cUL recognized (File #E338132)
- VDE (Pending Approval)

Schematic:

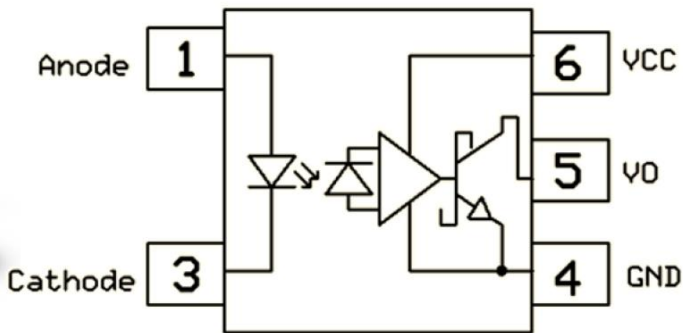

Dimension: (Dot location indicates pin 1)

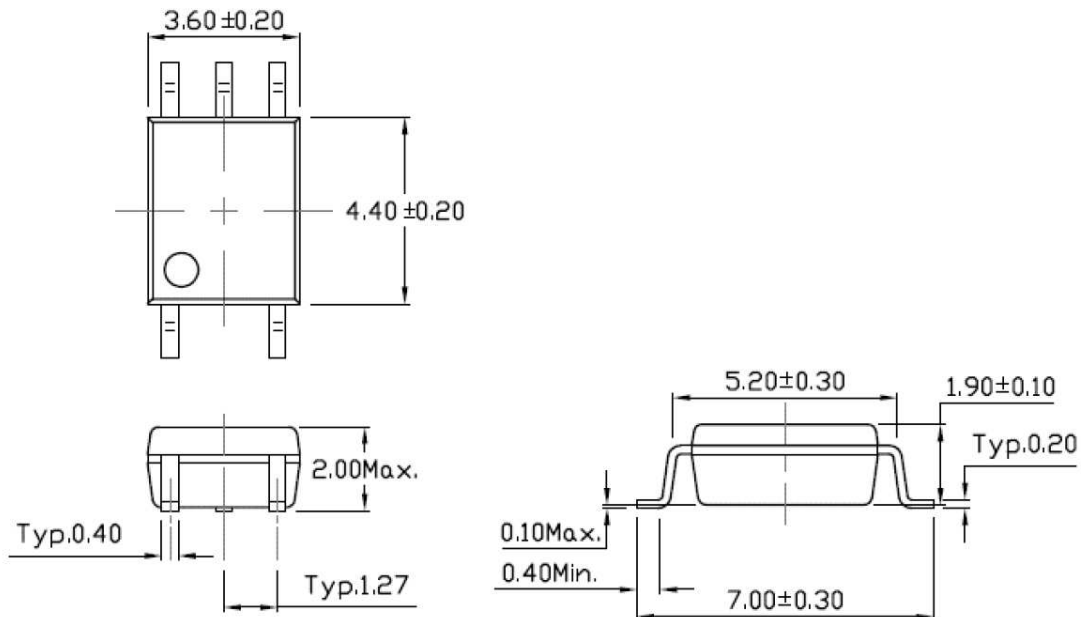

All Dimensions are in mm

Absolute Maximum Rating

Symbol	Parameter	Rating	Units
V _{ISO}	Isolation Voltage*	3750	V _{RMS}
T _{STG}	Storage Temperature	-55 ~ +150	°C
T _{OPR}	Operating Temperature	-55 ~ +85	°C
T _{SOL}	Lead Solder Temperature	260 for 10 sec	°C
EMITTER			
I _F	Forward Current	50	mA
V _R	Reverse Voltage	5	V
P _D	Power Dissipation	100	mW
	Power Dissipation Derated above 100°C	-	mW/°C
DETECTOR			
P _D	Power Dissipation	85	mW
I _{O(AVG)}	Average Output current	50	mA
V _O	Output voltage	7	V
V _{CC}	Supply voltage	7	V

*AC for 1 minute, RH =40~60%

Electrical Characteristic (T_A=25 °C)

(T_A=0 to 70C unless specified otherwise)

Emitter

Symbol	Characteristics	Device	Test Condition	Range			Unit
				Min	Typ	Max	
V _F	Forward Voltage	-	I _F = 10mA	-	1.4	1.6	V
V _R	Reverse Voltage		I _R = 5μA	5	-	-	V
ΔV _F /ΔT _A	Temperature coefficient of forward voltage		I _F = 16mA	-	-1.6	-	mV/°C

Detector

Symbol	Characteristic	Device	Test Condition	Range			Unit
				Min	Typ	Max	
I _{CCL}	Logic Low Supply Current	-	I _F =10mA, V _O =Open, V _{CC} =5V	-	9	13	mA
I _{CCH}	Logic High Supply Current	-	I _F =0mA, V _O =Open, V _{CC} =5V	-	6	9	mA
R _{IO}	Isolation Resistance		V _{IO} =500V _{DC}	5x10 ¹⁰	-	-	Ω
C _{IO}	Isolation Capacitance		f=1MHz	-	0.5	1.2	pF







Transfer Characteristics






Symbol	Characteristic	Device	Test Condition	Range			Unit
				Min	Typ	Max	
I _{OH}	Logic High Output Current		I _F =250μA, V _O =5.5V	-	2	100	μA
I _{FT}	Input Threshold Current		I _F =13mA, V _O =0.6V, V _{CC} =5.5V	-	3.3	5	mA
V _{OL}	Logic Low Output Voltage		I _F =5mA, I _O =13mA, V _{CC} =5.5V	-	0.35	0.6	V

Switching Characteristics (TA=25°C, Vcc=5V)



Symbol	Characteristic	Device	Test Condition	Range			Unit
				Min	Typ	Max	
T _{PHL}	Propagation Delay Time Logic High to Logic Low		C _L =15pF, R _L =350Ω,	-	40	75	ns
T _{PLH}	Propagation Delay Time Logic Low to Logic High			-	35	75	
Tr	Output Rise Time			-	40	-	
Tf	Output Fall Time			-	10	-	
CM _H	Common Mode Transient Immunity at Logic High	QTM600	I _F = 7.5mA, V _{OH} =2.0V, R _L =350Ω, T _A =25°C, V _{CM} =10Vp-p	-	-	-	V/μs
		QTM601	I _F = 7.5mA, V _{OH} =2.0V, R _L =350Ω, T _A =25°C, V _{CM} =50Vp-p	5000	-	-	
		QTM611	I _F = 7.5mA, V _{OH} =2.0V, R _L =350Ω, T _A =25°C, V _{CM} =1000Vp-p	20000	-	-	
CM _L	Common Mode Transient Immunity at Logic Low	QTM600	I _F = 0mA, V _{OL} = 0.8V, R _L =350Ω, T _A =25°C, V _{CM} =10Vp-p	-	-	-	
		QTM601	I _F = 0mA, V _{OL} = 0.8V, R _L =350Ω, T _A =25°C, V _{CM} =50Vp-p	5000	-	-	
		QTM611	I _F = 0mA, V _{OL} = 0.8V, R _L =350Ω, T _A =25°C, V _{CM} =1000Vp-p	20000	-	-	



Characteristic Curves

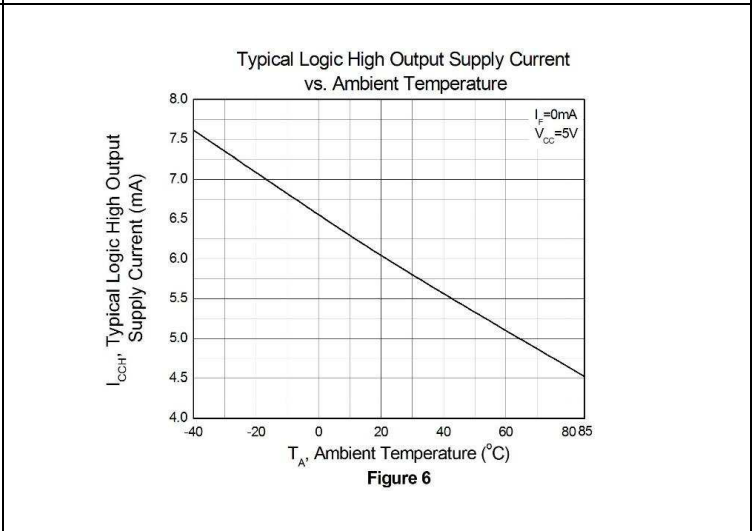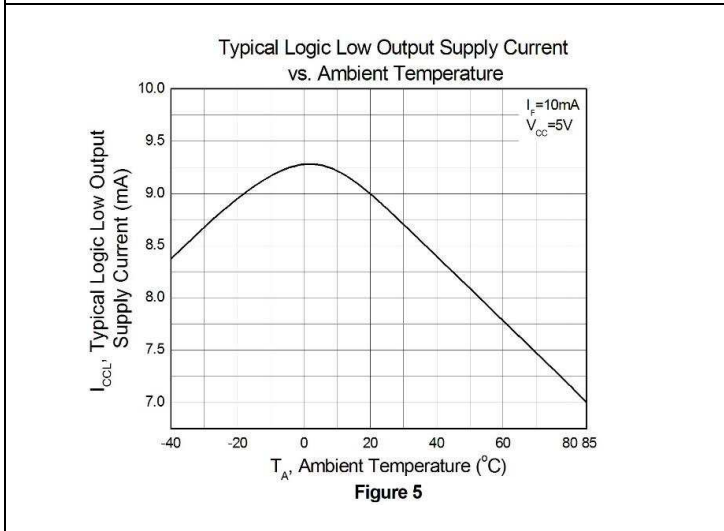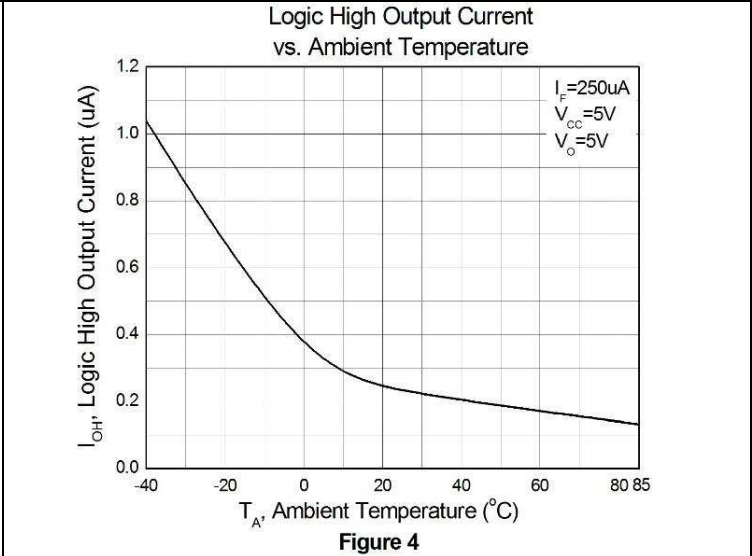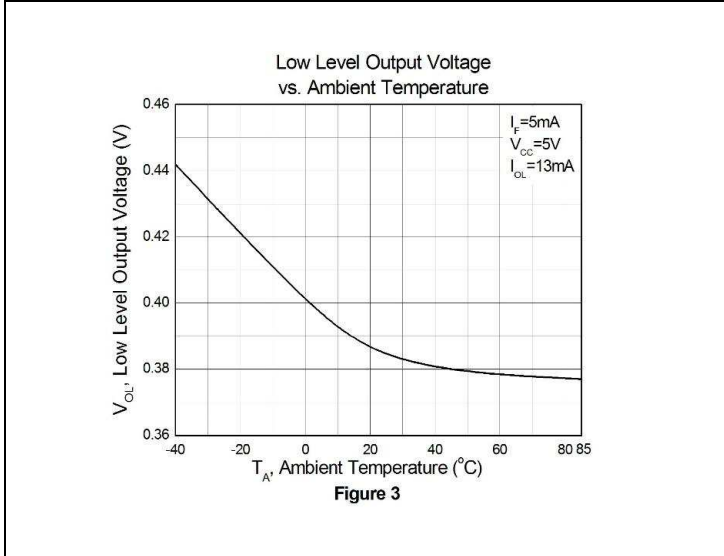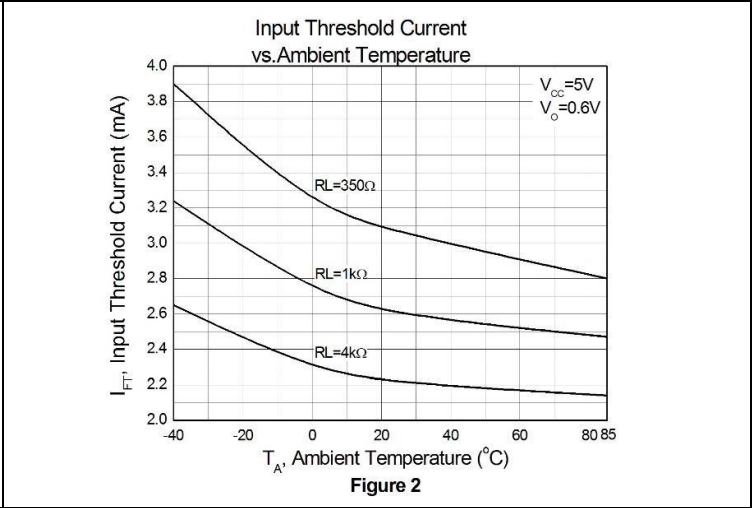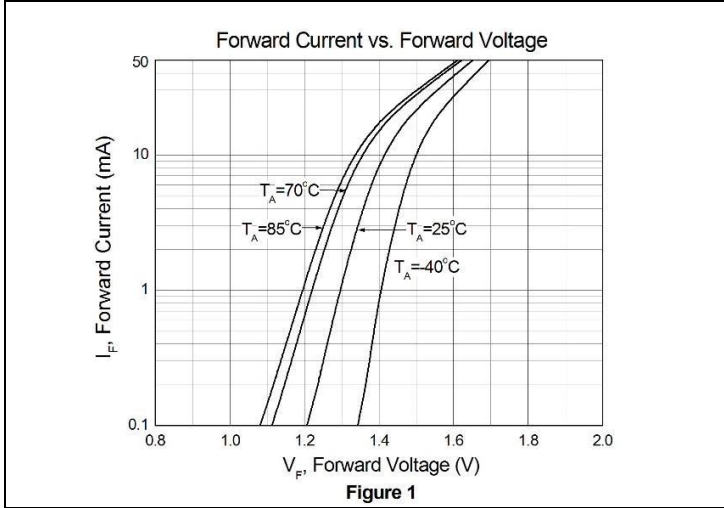

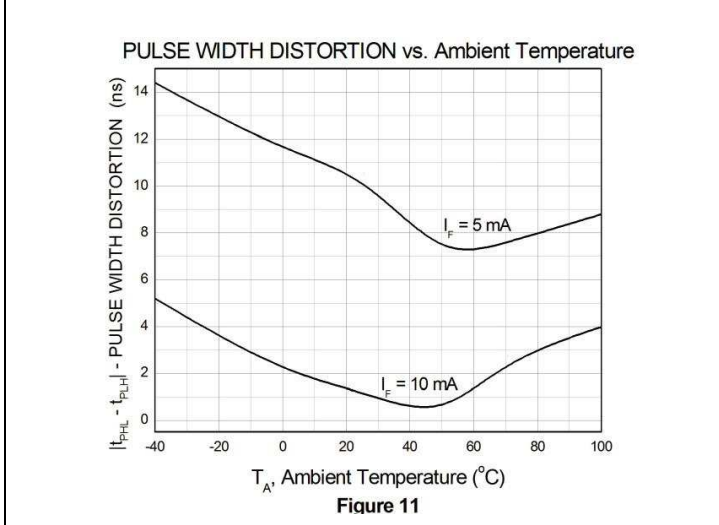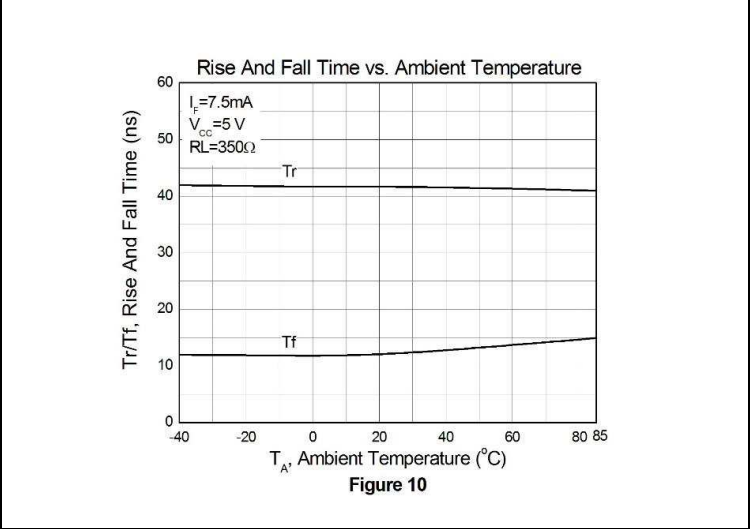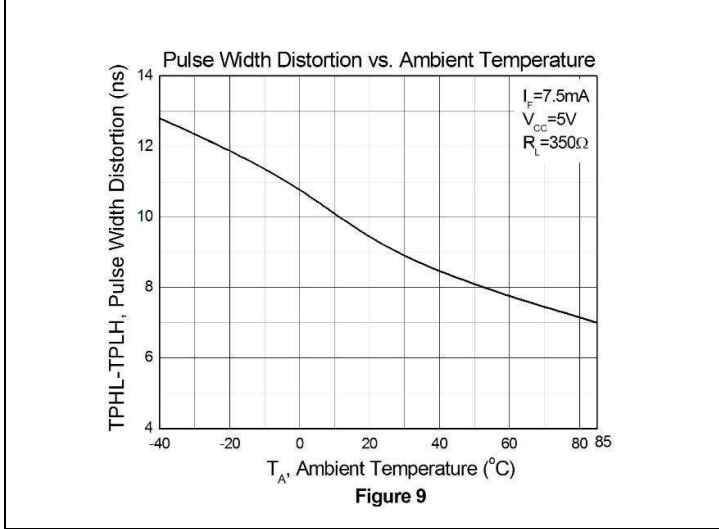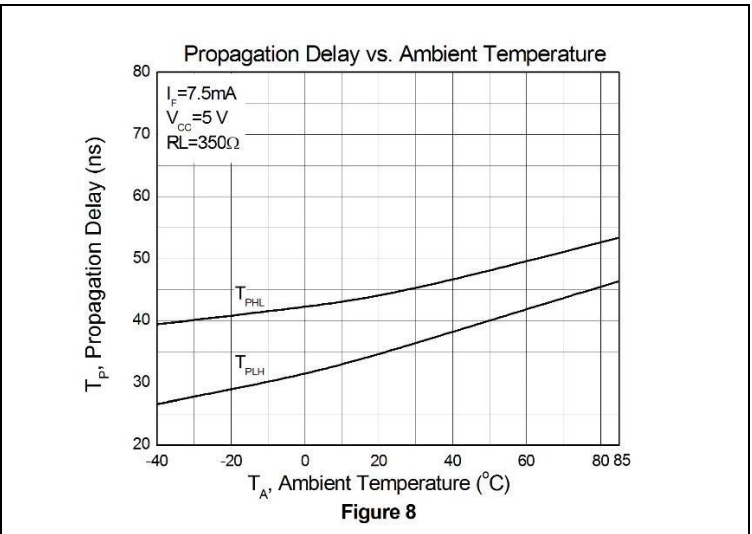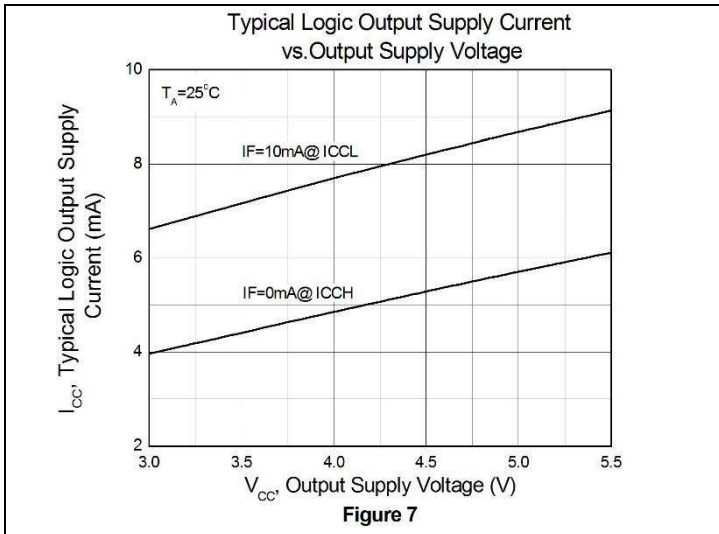


Test Circuits

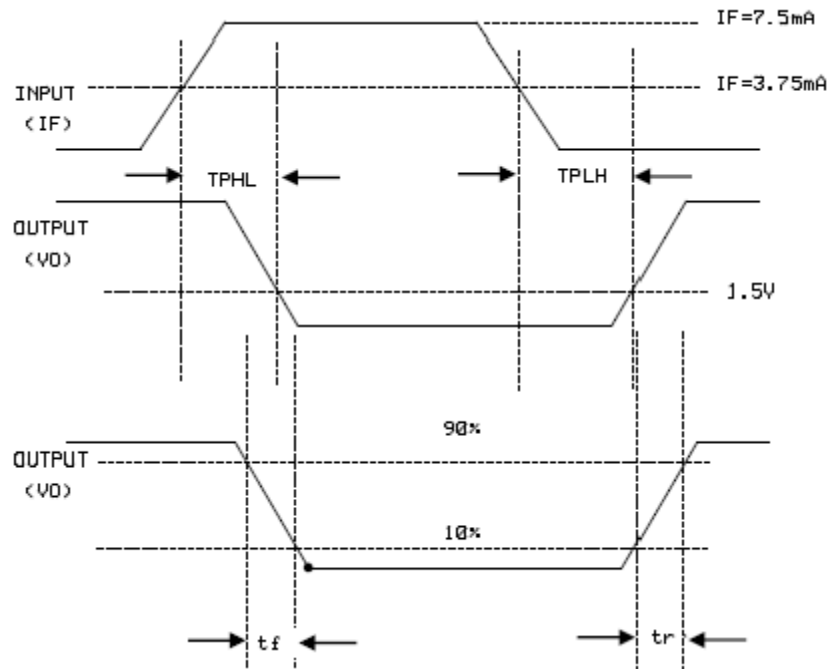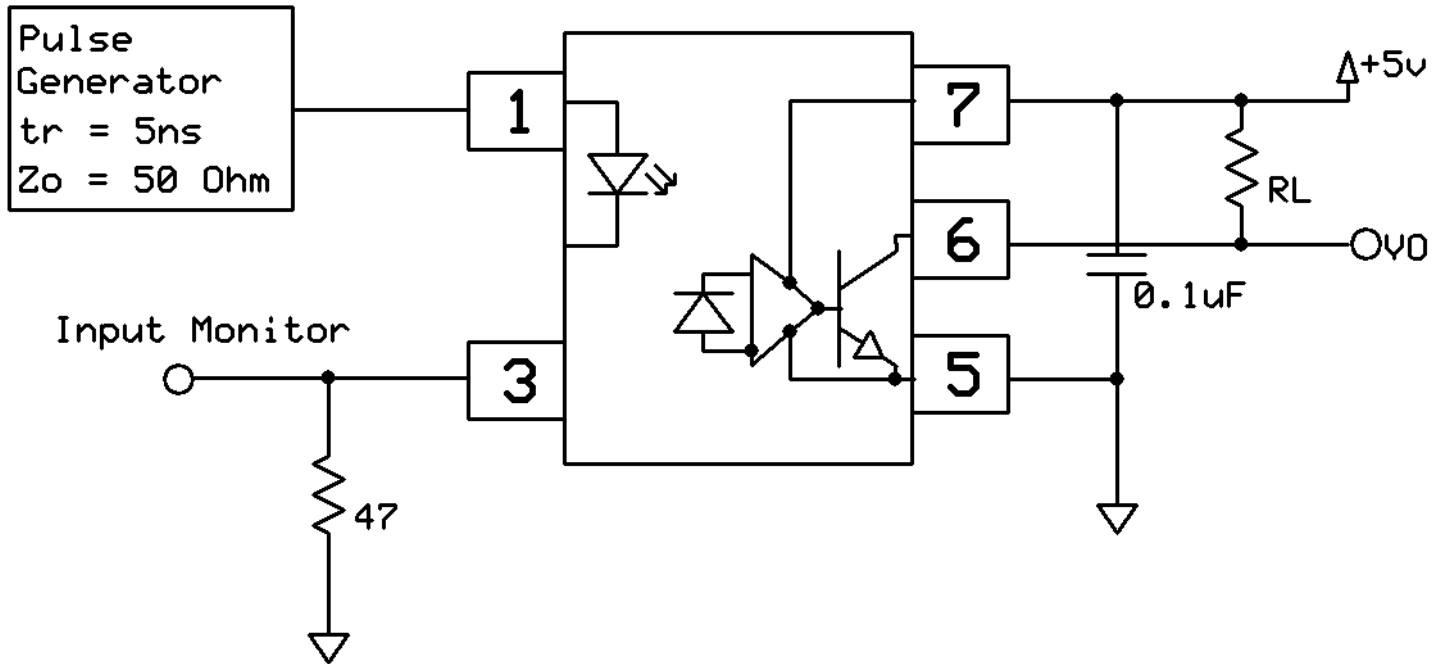

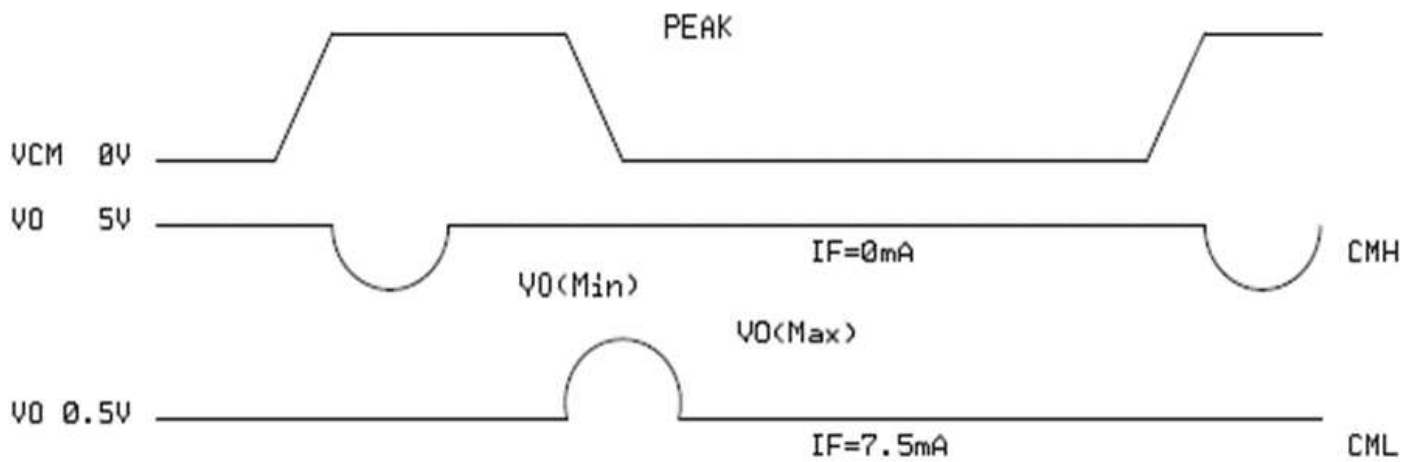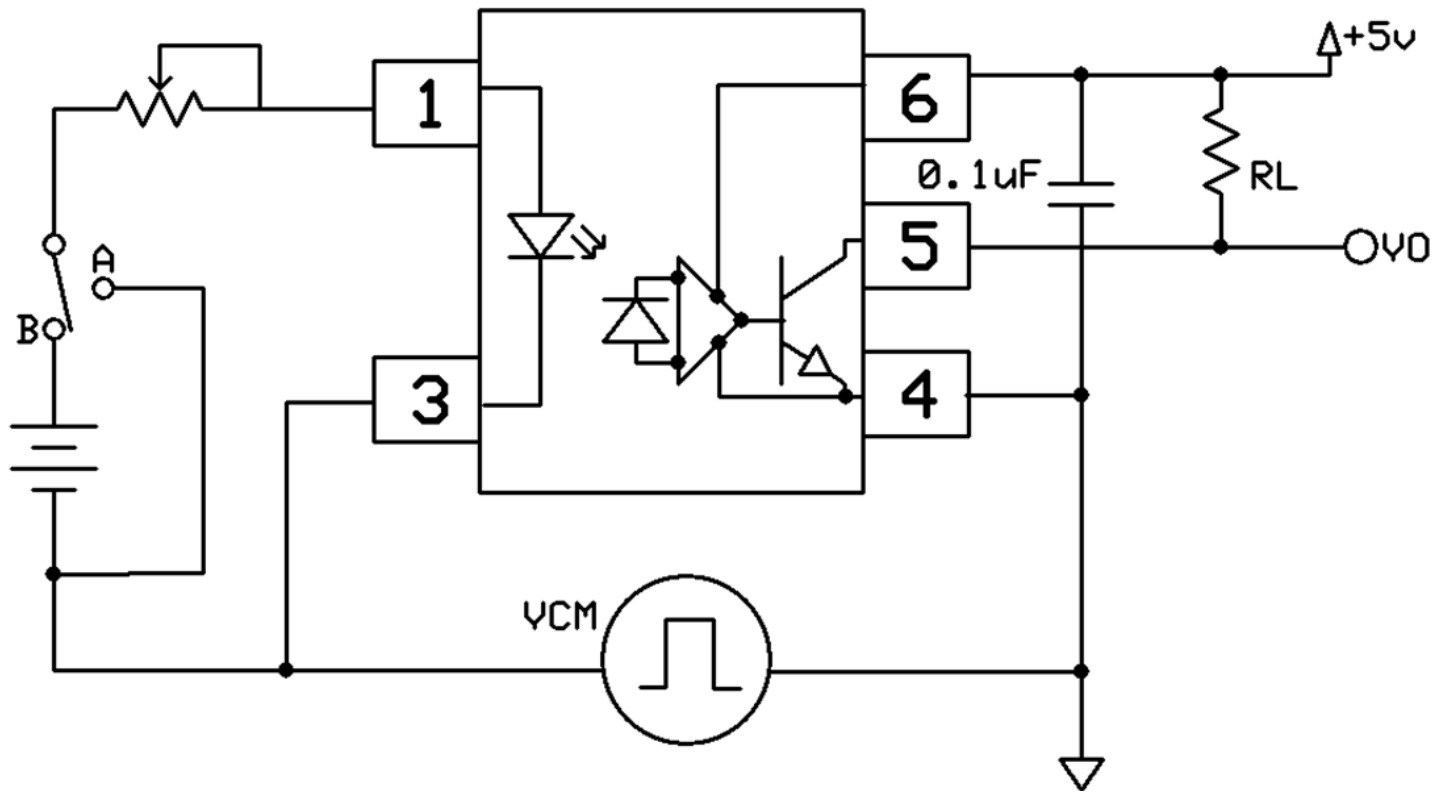




CMR Test Circuit


Solder Profile & Footprint

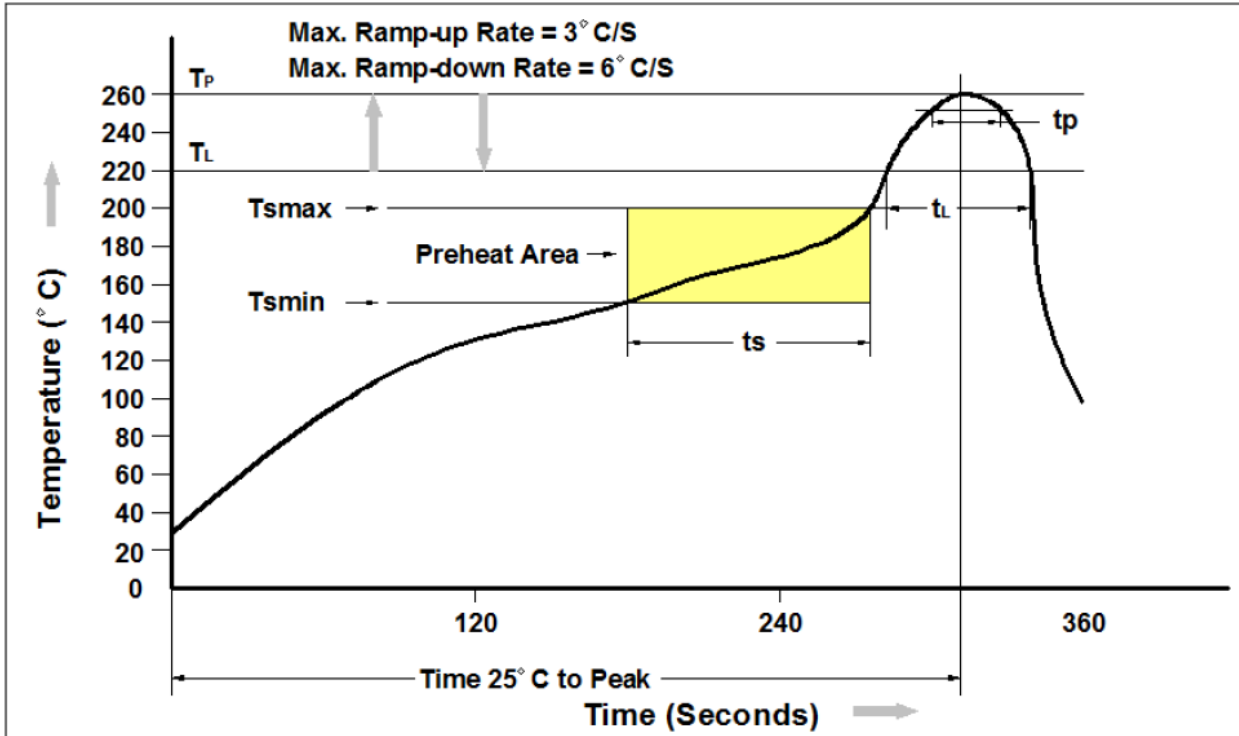

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	150°C
Temperature Max. (T _{smax})	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds
Ramp-up Rate (t _L to t _p)	3°C/second max.
Liquidous Temperature (T _L)	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds
Peak Body Package Temperature	260°C +0°C / -5°C
Time (t _p) within 5°C of 260°C	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

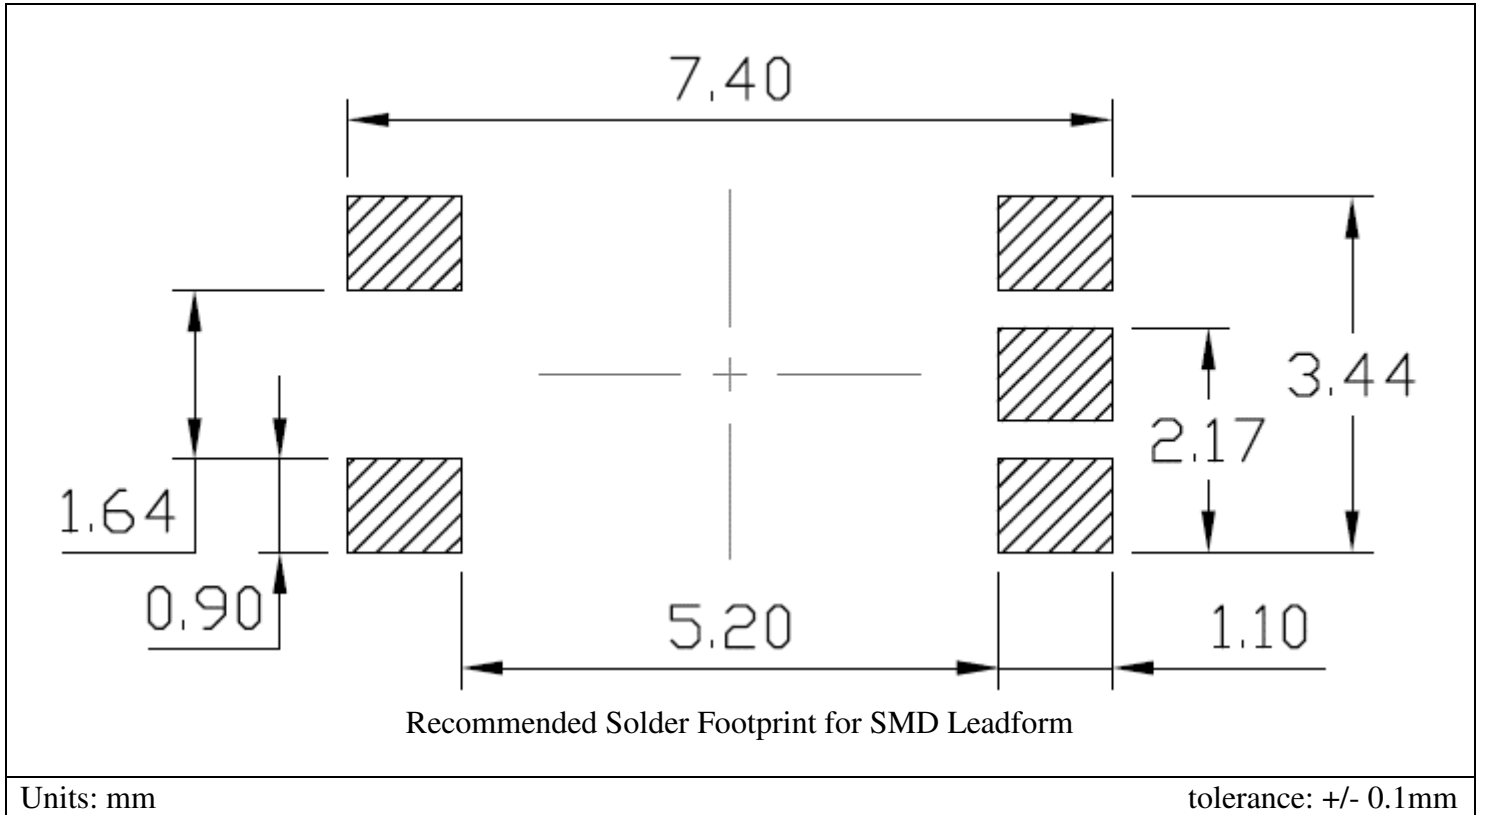

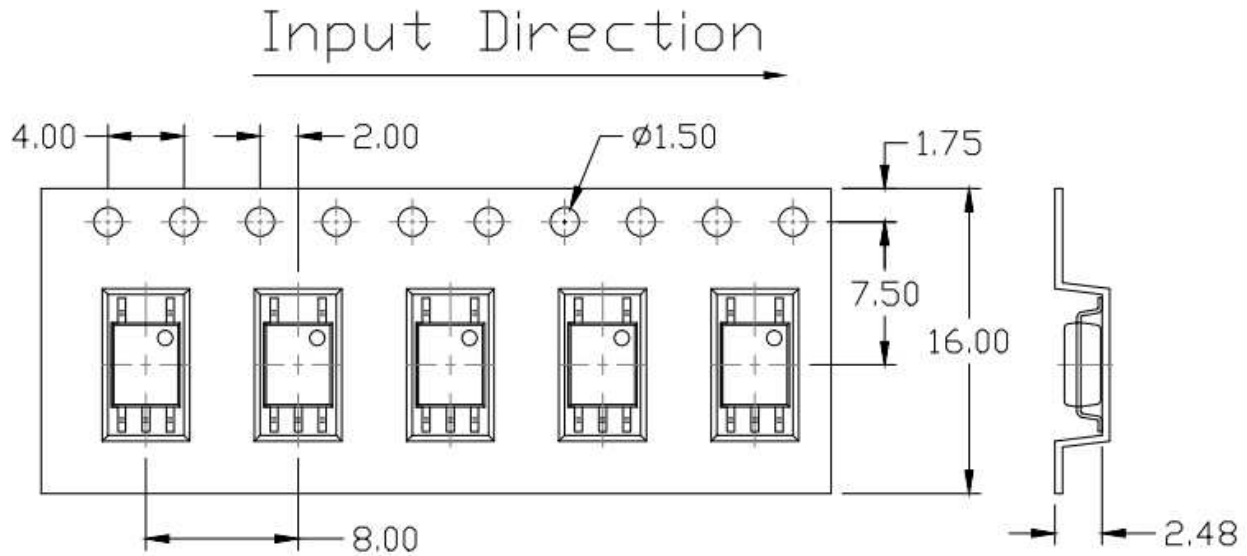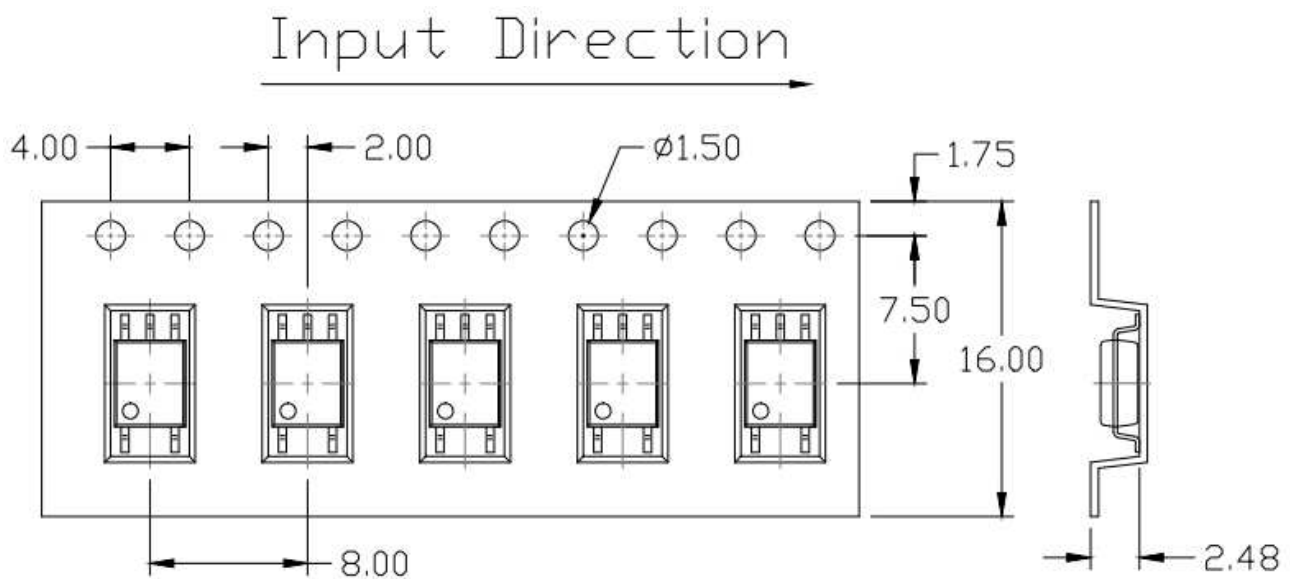Packing & Labeling**Tape Dimension:****Option T1****Option T2**

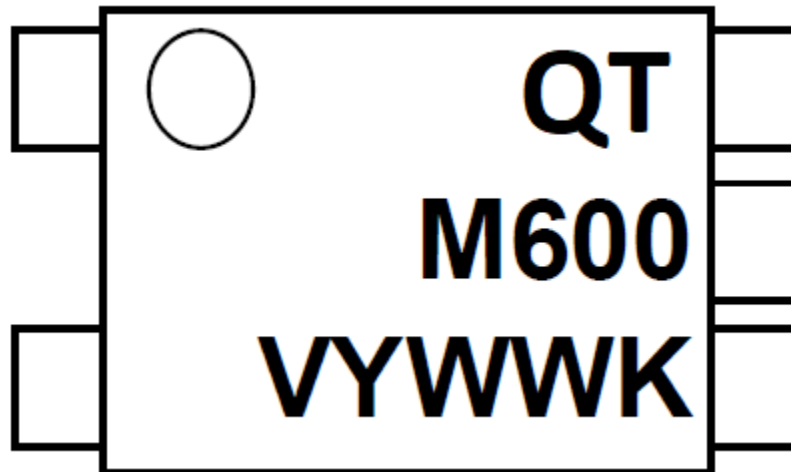Device Marking

QT = QT-Brightek Corporation
 M= Mini-Flat Package
 600 = part number
 Y = Year
 WW = Week
 V = VDE Option
 K= Manufacturing code

Ordering Information

QTM6XX(V)(Z)
 XX = Part number (X=00, 01, or 11)
 V = VDE option (V or None)
 Z = Tape and reel option (T1 or T2)

Option	Description	Quantity
T1	Surface Mount Lead Forming – with Option 1 Taping	3000 pcs/ reel
T2	Surface Mount Lead Forming – with Option 2 Taping	3000 pcs/ reel



Revision History

Description:	Revision #	Revision Date
Initial release of QTM600_601_611	1.0	02/12/2018

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.