



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

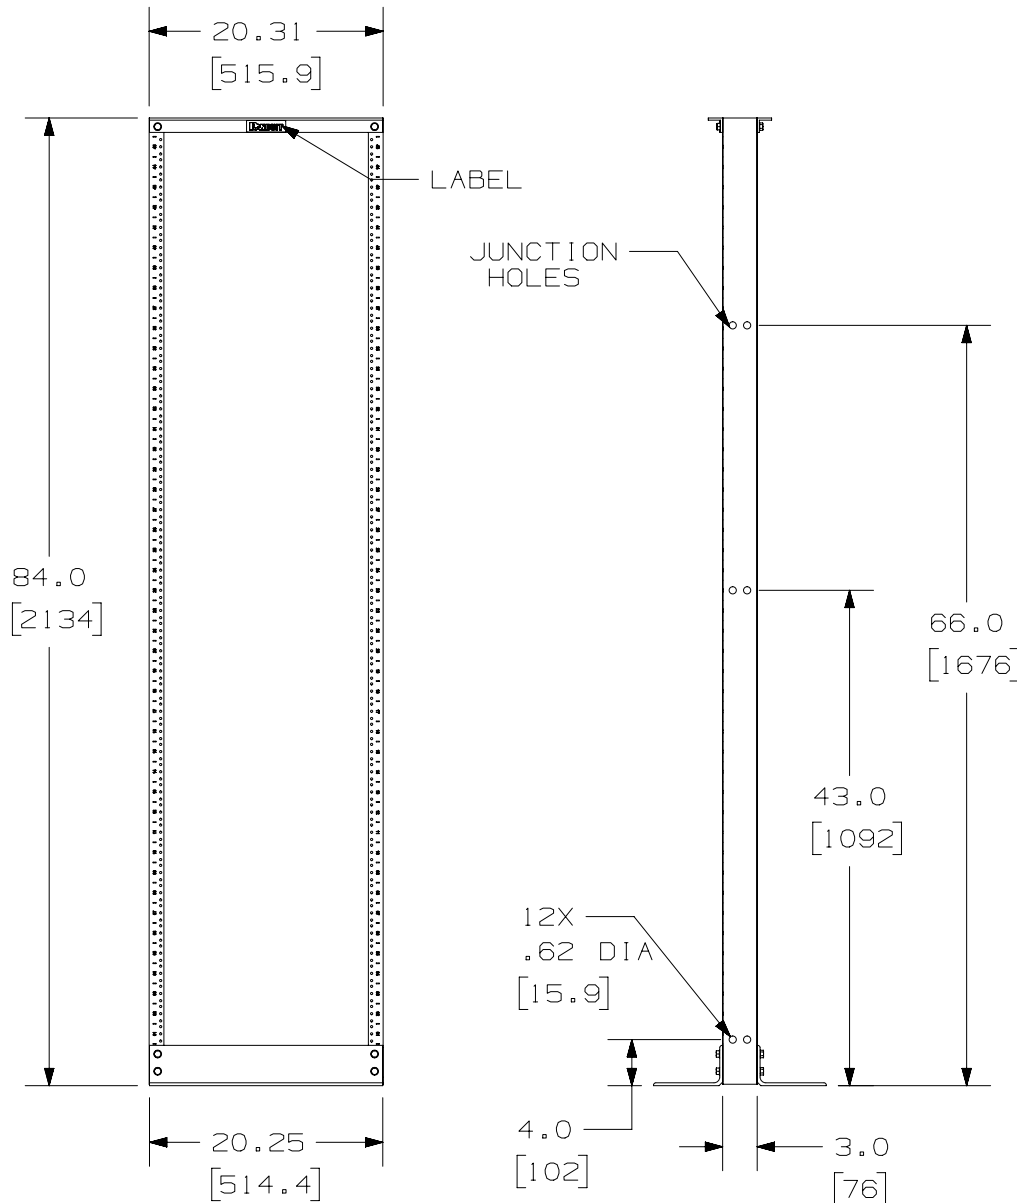


PANDUIT P/N	WEIGHT
R2P	28.00 LB/EACH (12.70 KG/EACH)

NOTES:

- CAN BE USED WITH ANY INDUSTRY STANDARD 19" COMPONENTS IN ADDITION TO ALL PANDUIT CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
- WILL HOLD UP TO 45 SINGLE RACK SPACINGS.
- EIA SPACING ON RACK: I.E., REF.
HOLE SPACING ON UPRIGHT CHANNELS:
.625, .625, .500, .625, .625, .500, ETC.
- ASSEMBLY IS REQUIRED.
- RACK PART THICKNESSES:
 - UPRIGHT CHANELS: WEB; .14 \pm .03
FLANGE; .19 \pm .03
 - TOP BRACKET: .19 \pm .03
 - BASE BRACKET: .25 \pm .03
- DIMENSIONS IN PARENTHESES ARE IN METRIC.
- ALL ASSEMBLY HARDWARE INCLUDED:
 - (12) 3/8-16 X 1" BLACK HEX HEAD CAP SCREW
 - (24) 3/8" PAINT PIERCING GROUNDING WASHER
 - (1) TUBE OF ANTI-OXIDIZING PASTE
 - (24) 12-24 X .5" SLOTTED PAN HEAD STEEL SCREWS
 - (12) 3/8-16 BLACK HEX NUTS
- LOAD RATING-1000 LBS.
- RU SPACING NUMBERS ARE CLEARLY PRINTED ON MOUNTING RAILS. RU NUMBERING IS BOTTOM-UP, WITH RU #1 AT BOTTOM AND RU #45 AT TOP.

TITLE 7' CABLE MANAGEMENT RACK (R2P)			
CUSTOMER DRAWING			
ITEM REVISION NAME 09V064AC/01		PANDUIT	
DATASET FILE NAME 09V064AC_DC/01B			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x \pm .1 [2.54] .xxx \pm .005 [.127] .xx \pm .01 [.25] ANGLES \pm 5°		MATERIAL: ALUMINUM	
THIRD ANGLE PROJECTION 		DRAWING NUMBER: 09V064AC_DC	
DRAWN BY BAME	DATE 5-26-10	CHK DPN	SCALE NONE
REV		DATE	
BY		CHK	
APR		DESCRIPTION	
ECN		SHT 1 OF 2	
A		A	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

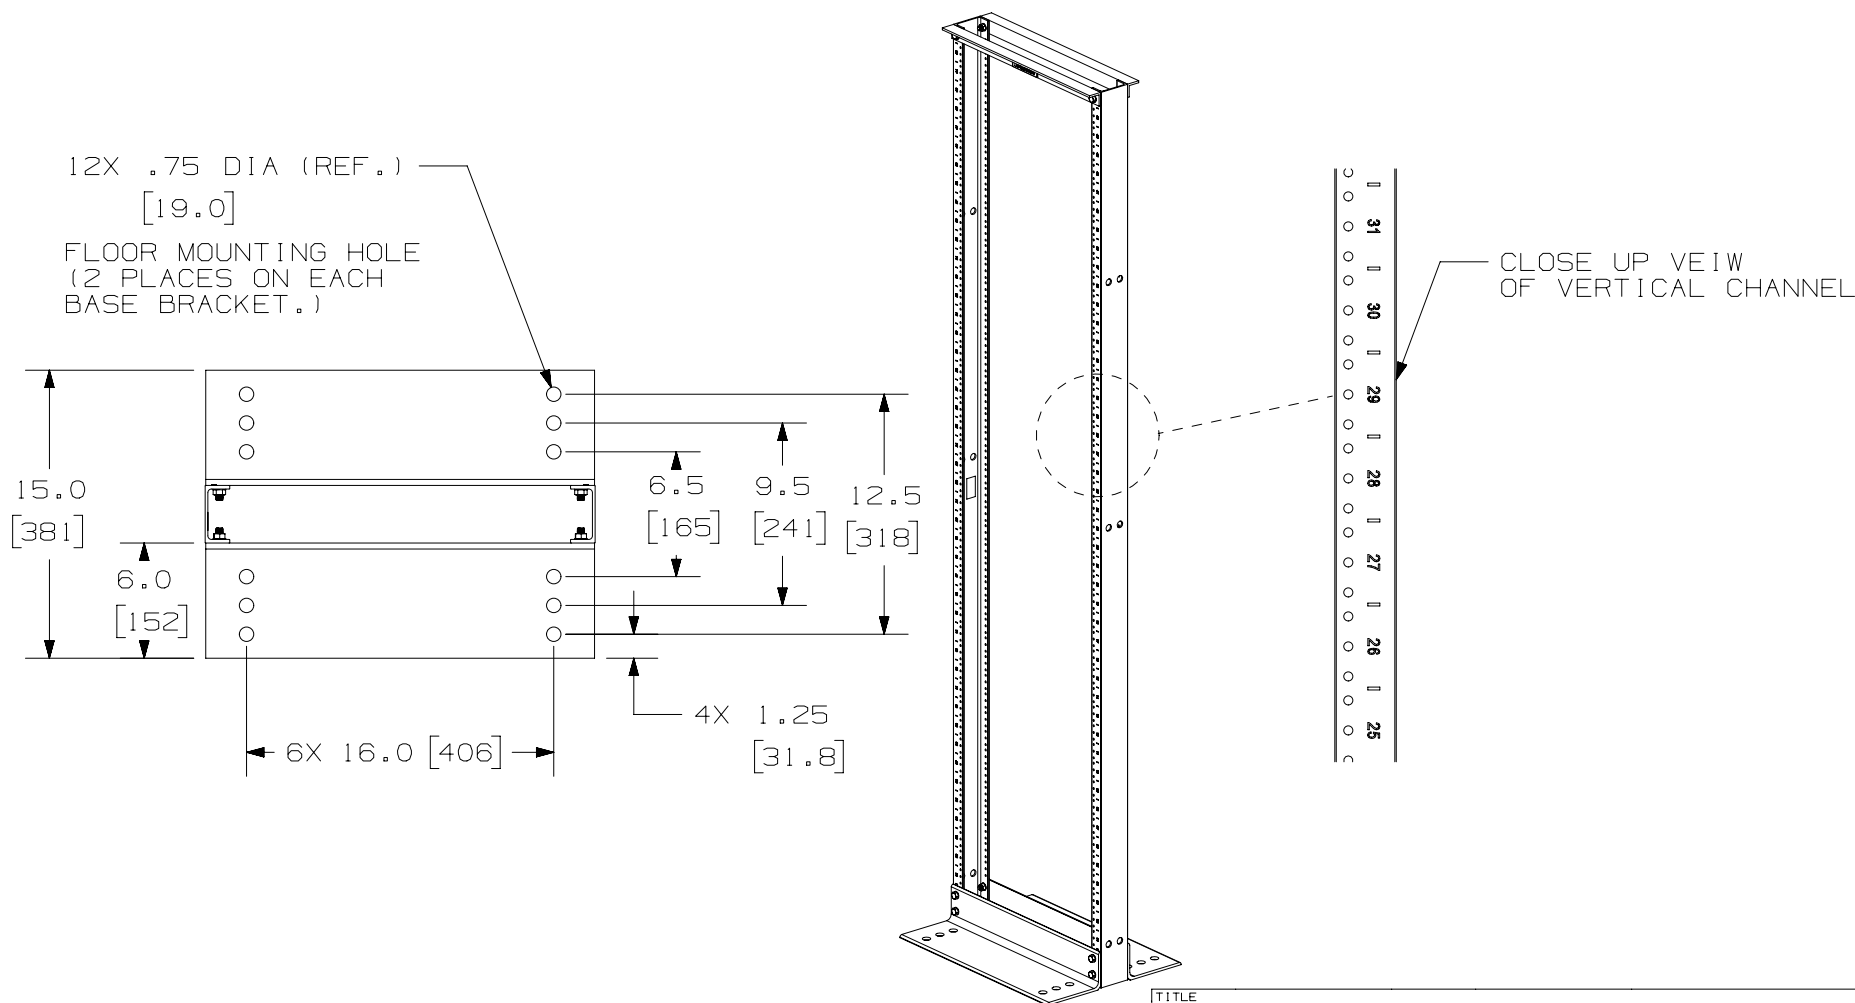

TITLE		7' CABLE MANAGEMENT RACK (R2P)	
CUSTOMER DRAWING			
ITEM REVISION NAME		09V064AC/01	
DATASET FILE NAME		09V064AC_DC/01B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		PANDUIT MATERIAL: ALUMINUM	
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER: 09V064AC_DC	
THIRD ANGLE PROJECTION			
DRAWN BY	DATE	CHK	SCALE
BAME	5-26-10	DPN	NONE
SHT 2 OF 2		A	