



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

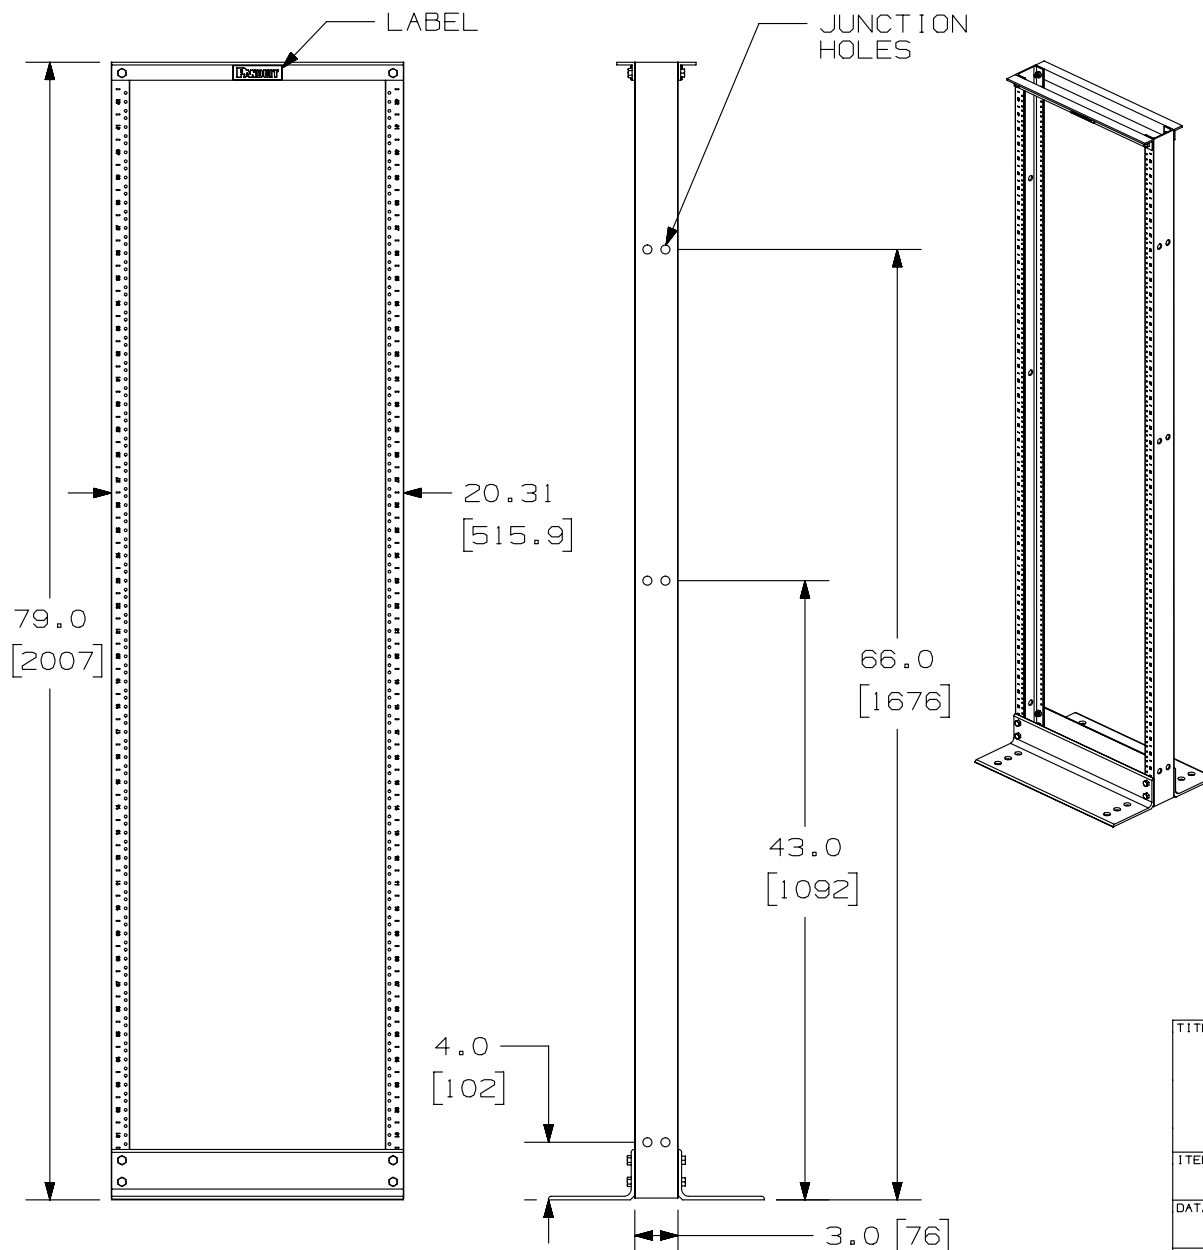


PANDUIT P/N	WEIGHT
R2P79	25.6 LB/EACH (11.6 KG/EACH)

NOTES :

1. VISIT OUR ON-LINE CATALOG AT  
WWW.PANDUIT.COM FOR A LIST OF CURRENT  
PARTS APPLICABLE FOR USE WITH THIS  
PRODUCT.
2. CAN BE USED WITH ANY INDUSTRY STANDARD  
19" COMPONENTS IN ADDITION TO ALL PANDUIT  
CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
3. WILL HOLD UP TO 42 SINGLE RACK SPACINGS.
4. EIA SPACING ON RACK: I.E., REF.  
HOLE SPACING ON UPRIGHT CHANNELS:  
.625, .625, .500, .625, .625, .500, ETC.
5. ASSEMBLY IS REQUIRED.
6. RACK PART THICKNESSES:
  - UPRIGHT CHANNEL: WEB; .14 ±.03  
FLANGE; .19 ±.03
  - TOP BRACKET: .187 ±.03
  - BASE BRACKET: .25 ±.03
7. DIMENSIONS IN PARENTHESIS ARE IN METRIC.
8. ALL ASSEMBLY HARDWARE INCLUDED:
  - (12) 3/8-16 X 1" BLACK HEX HEAD CAP  
SCREW
  - (24) 3/8" PAINT PIERCING GROUNDING  
WASHER
  - ( 1) TUBE OF ANTI-OXIDIZING PASTE
  - (12) 3/8-16 BLACK HEX NUTS
  - (24) 12-24 X .5" SLOTTED PAN HEAD  
STEEL SCREWS
9. LOAD RATING - 1000 LBS

02A	11-14-13	BAME	PM	SJAN	UPDATED VIEWS	V10687AK-DC
01A	6-22-10	BAME		CMK	ADDED SHEET AND DIMS	V10687AK-DC
00A	2-5-10	BAME	DPN	CMK	DRAWING RELEASED	V10687AK-DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN


TITLE						6.5 FOOT CABLE MANAGEMENT RACK (R2P79)					
						CUSTOMER DRAWING					
ITEM REVISION NAME			V10687AK/02			<b>PANDUIT</b>					
DATASET FILE NAME			V10687AK_DC/02A								
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]  .X ±                      .XXX ± .XX ±                     ANGLES ±						MATERIAL:  ALUMINUM					
 THIRD ANGLE PROJECTION						DRAWING NUMBER: V10687AK - DC					
DRAWN BY	DATE	CHK	CHECKED	SHEET NO.	TOTAL SHEETS	SHT 1 OF 2			SIZE A		
BAME	2-5-10	DPN	NONE								

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
R2P79	25.6 LB/EACH (11.6 KG/EACH)

# NOTES:


- VISIT OUR ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- CAN BE USED WITH ANY INDUSTRY STANDARD 19" COMPONENTS IN ADDITION TO ALL PANDUIT CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
- WILL HOLD UP TO 42 SINGLE RACK SPACINGS.
- EIA SPACING ON RACK: I.E., REF. HOLE SPACING ON UPRIGHT CHANNELS: .625, .625, .500, .625, .625, .500, ETC.
- ASSEMBLY IS REQUIRED.
- RACK PART THICKNESSES:
  - UPRIGHT CHANNEL: WEB; .14  $\pm$ .03  
FLANGE; .19  $\pm$ .03
  - TOP BRACKET: .187  $\pm$ .03
  - BASE BRACKET: .25  $\pm$ .03
- DIMENSIONS IN PARENTHESIS ARE IN METRIC.
- ALL ASSEMBLY HARDWARE INCLUDED:
  - (12) 3/8-16 X 1" BLACK HEX HEAD CAP SCREW
  - (24) 3/8" PAINT PIERCING GROUNDING WASHER
  - (1) TUBE OF ANTI-OXIDIZING PASTE
  - (12) 3/8-16 BLACK HEX NUTS
  - (24) 12-24 X .5" SLOTTED PAN HEAD STEEL SCREWS
- LOAD RATING - 1000 LBS

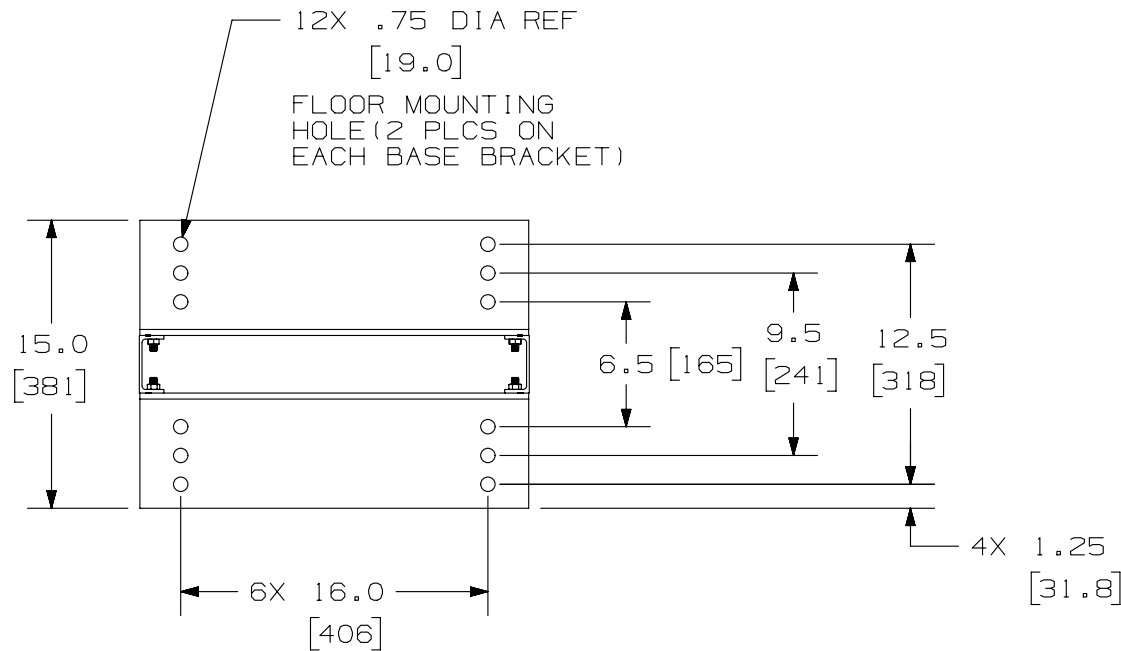

CLOSE UP OF  
VERTICAL CHANNEL

RU SPACINGS PRINTED  
NUMBERING UP FROM  
BOTTOM OF RACK

02A	11-14-13	BAME	PM	CMK	SEE SHEET 1 OF 2 FOR REVISIONS	V10687AK-DC
01A	6-22-10	BAME		CMK	SEE SHEET 1 OF 2 FOR REVISIONS	V10687AK-DC
00A	2-5-10	BAME	DPN	CMK	SEE SHEET 1 OF 2 FOR REVISIONS	V10687AK-DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE						
6.5 FOOT CABLE MANAGEMENT RACK (R2P79)						
CUSTOMER DRAWING						
ITEM REVISION NAME						
V10687AK/02						
DATASET FILE NAME				V10687AK_DC/02A		
<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]</p> <p>.X ±    </p>						