



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EC centrifugal fans

backward curved, single inlet, Ø 630



Highlights:

- 6-blade fan, 3-phase fan motor
- 10 VDC max. output / 10 mA, 20 VDC max. output / 50 mA, 0-10 V slave output, 24 V external program input, 0-10 VDC / PWM control input, 0-10V or 4-20 mA sensor input, external release input
- Integrated PID controller, RS485 MODBUS RTU technology
- Over-temperature protected electronics / motor, alarm relay
- Soft start, PFC passive, line undervoltage / phase failure detection

Material: Impeller: Aluminum sheet
 Rotor: Coated in black
 Electronic housing: Die-cast aluminum
 Assembly: Galvanized steel with aluminum posts

Mounting position: Shaft horizontal or rotor on bottom; rotor on top on request

Condensate discharge holes: Rotor-side


Direction of rotation: Clockwise, seen on rotor

Nominal Data

Type	RadiPac	Motor	Air flow CFM	Nominal voltage range VAC	Frequency Hz	Power input (1) Watts	Speed (1) RPM	Current draw (1) A	Temperature range (1) °C	Mass lbs	Ingress protection rating	Electrical wiring diagram	UL
R3G630-AB30-63F	EG1R-240-630-30	M3G150-IF	10,100	200...240	50/60	2,850	1,230	7.8	-25...40	65	IP54	A	Yes
R3G630-AB21-62F	EG1R-480-630-30	M3G150-IF	10,100	380...480	50/60	2,770	1,230	3.7	-25...55	65	IP54	A	Yes

(1) Nominal data at maximum load.

Curves

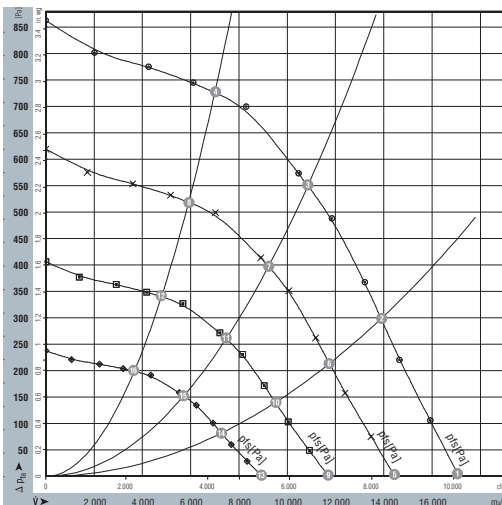

Measurement: LU-132496

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact.

Suction-side noise levels: L_{WA} as per ISO 13347, L_pA measured at 1m distance to fan axis.

The values given are valid under the measuring conditions mentioned and may vary according to the actual installation situation.

With any deviation to the standard set-up, the specific values have to be checked and reviewed once installed or fitted.

For detailed information on the measuring set-up, please contact ebm-papst.

	n rpm	Pe W	I A (460V)	I A (230V)	L_{WAin} dB(A)
1	1230	2052	3.0	5.6	85
2	1230	2593	3.7	7.0	82
3	1230	2770	3.7	7.8	80
4	1230	2581	3.7	7.0	81
5	1050	1237	1.8	3.4	82
6	1050	1569	2.2	4.3	78
7	1050	1779	2.5	4.8	77
8	1050	1558	2.2	4.3	77
9	850	656	0.9	1.7	77
10	850	832	1.2	2.3	73
11	850	944	1.3	2.5	72
12	850	827	1.2	2.3	72
13	650	293	0.4	0.8	71
14	650	372	0.5	1.0	67
15	650	422	0.6	1.1	66
16	650	370	0.5	1.0	66

