



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EC centrifugal fans

backward curved, single inlet, Ø 630



Highlights:

- 6-blade fan, 3-phase fan motor
- 10 VDC max. output / 10 mA, 24 V external program input, 0-10 VDC / PWM control input
- Integrated PID controller, RS485 MODBUS RTU technology
- Over-temperature protected electronics / motor, alarm relay
- Soft start, PFC passive, line undervoltage / phase failure detection

Material: Impeller: Aluminum sheet

Rotor: Coated in black

Electronic housing: Die-cast aluminum

Assembly: Galvanized steel with aluminum posts

Mounting position: Shaft horizontal or rotor on bottom; rotor on top on request

Condensate discharge holes: Rotor-side


Direction of rotation: Clockwise, seen on rotor

Nominal Data

Type	RadiPac	Motor	Air flow	Nominal voltage range	Frequency	Power input (1)	Speed (1)	Current draw (1)	Temperature range (1)	Mass	Ingress protection rating	Electrical wiring diagram	UL
			CFM	VAC	Hz	Watts	RPM	A	°C	lbs			
R3G630-AC05-61F	EG1R-480-630-60	M3G150-NA	11,150	380...480	50/60	4,000	1,370	5.4	-25...50	85	IP54	B	Yes

(1) Nominal data at maximum load.

Curves

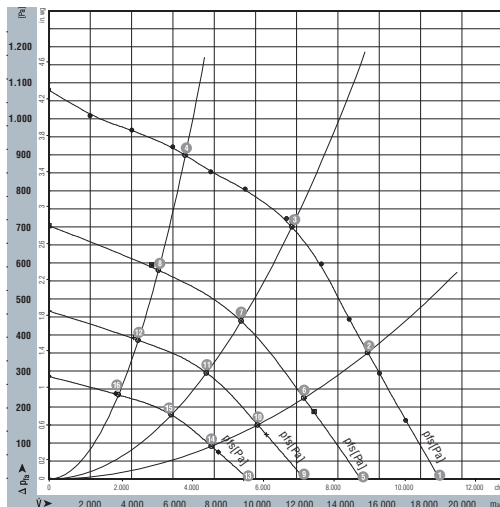

Measurement: LU-112140
Measurement: LU-114038
Measurement: LU-114039
Measurement: LU-114040

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact.

Suction-side noise levels: L_{WA} as per ISO 13347, L_{PA} measured at 1m distance to fan axis.

The values given are valid under the measuring conditions mentioned and may vary according to the actual installation situation.

With any deviation to the standard set-up, the specific values have to be checked and reviewed once installed or fitted.

For detailed information on the measuring set-up, please contact ebm-papst.

	n rpm	Pe W	I A (460V)	L _{WA} in dB(A)
1	1370	2975	4.0	90
2	1370	3591	4.8	86
3	1370	4000	5.4	83
4	1370	3345	4.5	85
5	1100	1432	2.0	82
6	1100	1712	2.3	79
7	1100	1930	2.6	77
8	1100	1591	2.2	79
9	900	791	1.2	76
10	900	954	1.4	73
11	900	1080	1.5	72
12	900	891	1.3	73
13	700	402	0.7	69
14	700	464	0.8	67
15	700	516	0.9	65
16	700	438	0.7	66

