



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Features

## TRIAC Dimmable

## LED Driver

- Triac –dimmable with leading or trailing edge dimmers
- Class II with SELV output (no earth required)
- Extra-large screw terminals and integrated cable clamps for easy installation
- Power factor corrected >0.95
- Dimming range 1..100%
- Compatible with a wide range of dimmers

## RACT18

### 18 Watt

### TRIAC

### Dimmable

### Single Output



IEC/EN61347 Certified  
 IEC/EN61347-2-13 Certified  
 EN61547 Certified  
 EN62493 Certified  
 EN55015 Compliant  
 CB Report

### Description


The RACT18-xxx series are low cost, triac-dimmable, constant current 18W LED drivers available with either 350mA, 500mA, 700mA, 1.05A or 1.4A full-range outputs. The drivers are Class II (double insulated) meaning no earth connection is required. The phase angle dimming works with leading or trailing edge dimmers. The RACT18 is suitable for indoor locations up to 50°C ambient temperature and is certified for building into furniture for applications such as dimmable shelf lighting, cove lighting or accent lighting. It is CE marked (LVD + EMC + RoHS) and has the international IEC61347-1 CB report certification.

### Selection Guide

Part Number	Input Voltage Range [VAC]	Output Voltage Range [VDC]	Output Current [mA]	Efficiency min. @rated load [%]	Output Power [W]
RACT18-350	198-264	26-52	350	85	18
RACT18-500	198-264	18-36	500	84	18
RACT18-700	198-264	13-26	700	85	18
RACT18-1050	198-264	9-18	1050	82	18
RACT18-1400	198-264	6.5-13	1400	82	18

All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.

### Model Numbering



### Specifications (measured @ ta= 25°C, 240VAC, rated load unless otherwise specified)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range		198VAC	230VAC	264VAC
Input Current	RACT18-350,1050,1400 RACT18-500,700			110mA 120mA
Inrush Current	full load			5A
No Load Power Consumption				1W
Input Frequency Range		50Hz		60Hz
Power Factor	full load	0.95		
THD	full load			20%
Start-up Time				500ms

continued on next page

**Specifications** (measured @ ta= 25°C, 240VAC, rated load unless otherwise specified)

Parameter	Condition	Min.	Typ.	Max.
Internal Operating Frequency	RACT18-350,700,1050 RACT18-500 RACT18-1400		60kHz 64kHz 65kHz	
Output Ripple Current <sup>(1)</sup>	RACT18-350 RACT18-500 RACT18-700 RACT18-1050 RACT18-1400			150mA 200mA 260mA 700mA 560mA

**Notes:**

Note1: Measured at 20MHz BW by using a 12" twisted pair-wie terminated with a 0.1µF and 47µF capacitor parallel across output.

### REGULATIONS

Parameter	Condition	Value
Output Accuracy		±5% typ.
Load Regulation		5% max.
Line Regulation		5% max.

### PROTECTION

Parameter	Condition	Value
Input Fuse		fusible resistor
Short Circuit Protection (SCP)		Latch OFF, auto recovery after fault condition is removed
Over Voltage Protection (OVP)	RACT18-350 RACT18-500 RACT18-700 RACT18-1050 RACT18-1400	60VDC max. 43VDC max. 33VDC max. 24VDC max. 22VDC max. Latch OFF, auto recovery after fault condition is removed
Over Load Protection (OLP)		Latch OFF, auto recovery after fault condition is removed
Over Temperature Protection (OTP)	110°C	Latch OFF, auto recovery after fault condition is removed
Isolation Voltage	I/P to O/P tested for 1 minute	3.75kVAC
Leakage Current		5mA max.

**Maximum loading of automatic circuit breakers\***

\* @ 230VAC, 10hm, 90° phase angle and max. load

Circuit Breaker	Circuit Breaker Current			
	10A	16A	20A	25A
Typ				
B	24	38	46	58
C	38	62	74	92

### ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	without derating @ natural convection 0.1m/s (see graph)	-20°C to +50°C
Max. Case Temperature	at tc point	+80°C max.
Operating Humidity	non-condensing	5-85% RH
IP Rating		IP20
Pollution Degree		PD2
Design Lifetime	+25°C ambient	>30 x 10 <sup>3</sup> hours


continued on next page



**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , 240VAC, rated load unless otherwise specified)

**Derating Graph**

(@ Chamber and natural convection 0.1 m/s)

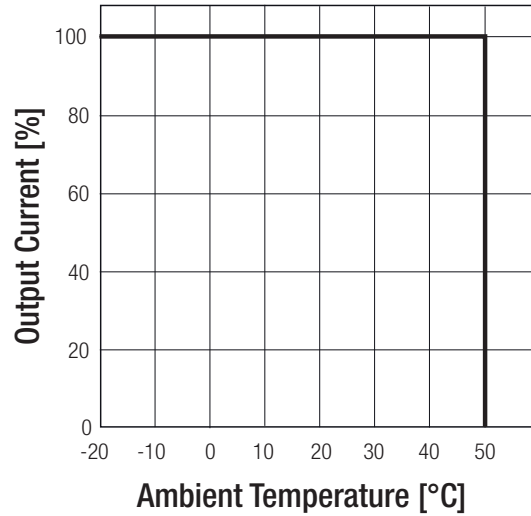

**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report Number	Standard
Lamp Controlgear General Requirements for Safety (CB Scheme)	325797	IEC61347-1:2007, 2nd Edition
Lamp Controlgear Particular Requirements (CB Scheme)		IEC61347-2-13: 2014, 2nd Edition
Lamp Controlgear General Requirements for Safety (LVD)		EN61347-1:2007, 2nd Edition
Lamp Controlgear Particular Requirements (LVD)		EN61347-2-13: 2014, 2nd Edition
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS2+		RoHS 2011/65/EU + AM2015/863

EMC Compliance	Condition	Standard / Criterion
Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment		EN55015:2013 + A1:2015
Limits for harmonic current emissions		IEC61000-3-2:2014, Class C
Limitation of voltage fluctuations/flicker in low-voltage systems		IEC61000-3-3:2013
Equipment for general Lighting Purpose EMC Immunity Requirements		IEC61547:2009
Assessment of lighting equipment related to human exposure to electromagnetic fields		EN62493:2015
ESD Electrostatic discharge immunity test	$\pm 8\text{kV}$ Air Discharge, $\pm 4\text{kV}$ Contact Discharge	IEC61000-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	IEC61000-4-3, Criteria A
Fast Transient and Burst Immunity	L-N= $\pm 1\text{kV}$ ; DC Output= $\pm 0.5\text{kV}$	IEC61000-4-4, Criteria A
Surge Immunity	L-N= $\pm 0.5\text{kV}$	IEC61000-4-5, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	3V r.m.s.	IEC61000-4-6, Criteria A
Voltage Dips and Interruptions	>95% reduction	IEC61000-4-11, Criteria B
	30%	IEC61000-4-11, Criteria B



**DIMENSION and PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Material	Case	Plastic (JL94V-2)
	PCB	FR4 (JL94V-0)
Package Dimension (LxWxH)		120.0 x 45.0 x 28.0mm
Package Weight		100g typ.




continued on next page

**Specifications** (measured @ ta= 25°C, 240VAC, rated load unless otherwise specified)

**Dimensions Drawing (mm)**

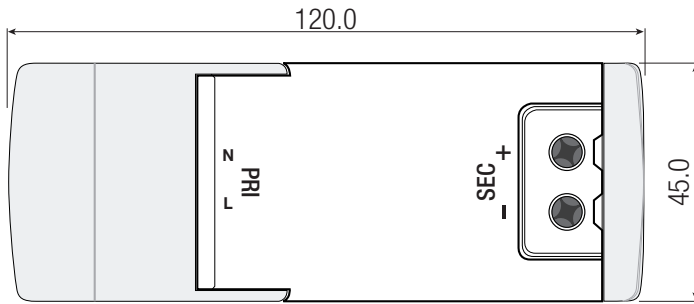


wire stripping length: 6-7mm  
recommended tightening torque: 0.25Nm  
tc= case temperature measuring point  
FC= fixing centers  
Tolerance: xx.x= ±1.0mm  
xx.xx= ±0.5mm

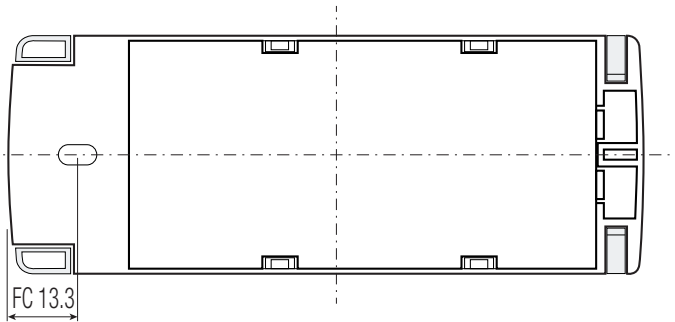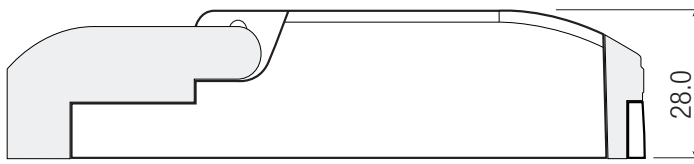

**Connection via Screw Terminal**

Function	Solid Wire	Stranded Wire <sup>(3)</sup>	AWG
VAC in (N)	0.75-2.5mm <sup>2</sup>	0.75-2.5mm <sup>2</sup>	20-14
VAC in (L)	0.75-2.5mm <sup>2</sup>	0.75-2.5mm <sup>2</sup>	20-14
LED+	0.5-2.5mm <sup>2</sup>	0.5-2.5mm <sup>2</sup>	21-14
LED-	0.5-2.5mm <sup>2</sup>	0.5-2.5mm <sup>2</sup>	21-14

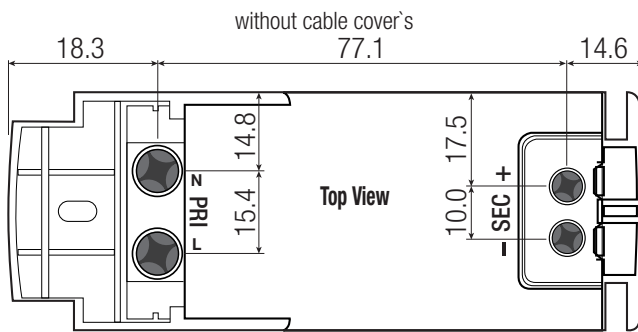


**Notes:**

Note3: The use of sleeve or ferrule terminations is recommended.

**INSTALLATION and APPLICATION**

Dimming Type	Value
AC phase-cut	work with leading/trailing edge dimmers

**Connection**

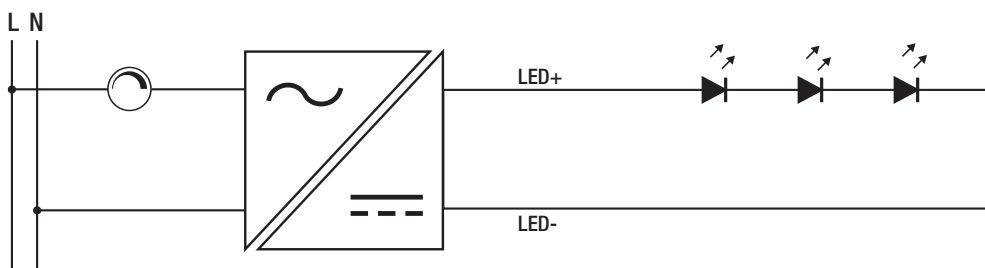

**Specifications** (measured @ ta= 25°C, 240VAC, rated load unless otherwise specified)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	cardboard box	330.0 x 137.0 x 55.0mm
Packaging Quantity		10pcs
Storage Temperature Range		-20°C to +70°C
Storage Humidity	non-condensing	5-85% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.