

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Secure Industrial Router

Red Lion's RAM 6021 industrial routers provide secure network communication between local and wide area networks.

With a rugged design and flexible platform, the routers provide the ability to remotely connect, monitor and control assets across a variety of industrial applications. The RAM 6021's web based event engine can be customized to trigger I/O or email alerts, to quickly notify personnel of critical events based on operational data. Add in robust security features, which include a stateful firewall, NAT translations and VPN connections, and the RAM 6021 delivers a compact all-in-one solution that seamlessly connects to existing Ethernet infrastructures, including networks with Modbus and DNP3 enabled devices.



APPLICATIONS

- > Factory Automation
- Oil & Gas
- Water/Wastewater

PRODUCT HIGHLIGHTS

- > Secure network routing and communication
- > LAN-to-LAN or LAN-to-WAN connectivity
- > Intrusion protection through stateful firewall
- > NAT support for 1-to-1 and 1-to-many translations
- > 25 VPN connections for secure remote access
- > Built-in Modbus and DNP3 gateways
- > Event engine to trigger I/O or send email alerts
- > Rugged industrial design in a compact package

FEATURES & BENEFITS

- > Built-in security and routing protects against unwanted intrusion
 - Intrusion protection and secure data access
 - IPsec and SSL VPN tunnels
 - Port forwarding
 - Stateful firewall
 - Packet filtering
 - Access Control List (ACL)
- > Flexible all-in-one platform reduces complexity
 - Remote TCP/IP based capabilities
 - Integrated switching and routing
 - Serial-to-IP conversion
 - Access IP and serial devices simultaneously

- > Rugged, compact design deploys easily in space-constrained locations
 - -40 to +85°C operating temperature
 - DIN-rail mounting
- > Remote monitoring and control eliminates site visits
 - · Instant access to SCADA data
 - Modbus and DNP3 (serial and IP) protocol support
 - Simple integration for complex configurations
 - ID routing to existing Modbus hardware
- > Web-based management simplifies deployment and configuration
 - · Remote diagnostics and troubleshooting
 - · Key metric reporting









TUNNELING

IPsec and SSL

NAT, port forwarding, dynamic DNS, DHCP Stateful inspection firewall, IP transparency Routing Protocols OSPF, BGP, RIP, VRRP **Encapsulation Protocols GRE**

PROTOCOL GATEWAY

Modbus RTU/TCP/ASCII/RTU DNP3 - slave

ETHERNET INTERFACE (10/100 AUTO-SENSING)

5x RJ45 (port 5 - WAN/LAN capability)

DATA THROUGHPUT

LAN ports: 100Mbps WAN port: 45Mbps

SERIAL INTERFACE

1x RS-232 Serial DB9 115200bps

USB INTERFACE

1x USB 2.0 mini configuration port

MECHANICAL

Dimensions: steel 120 x 96 x 51 mm (4.7" x 3.77" x 2.0") Weight: 544g (1.2 lbs)

REDUNDANT POWER INPUT

4-pin screw terminal Side mounted 2.5mm barrel connector 8-30 Vdc (12 Vdc nominal) Input current (max): 150mA

5.20" [13.21cm] [11.94cm]

ENVIRONMENTAL

Operating temperature: -40° to +85°C

Shock: IEC60068-2-27 Vibration: IEC60068-2-6

Humidity: 5 to 95% non-condensing

CERTIFICATION

EMI/EMC:

Emissions: FCC, Part 15 and Industry Canada, ICES-003; Class A;

EN55022, IEC61000-6-4

Immunity: IEC61000-6-2 (EN61000-4-2,3,4,5,6,8)

Hazardous Locations: Class I, Div. 2, Groups A, B, C, D, ISA 12.12.01

Electrical safety: UL508/CSA22.2/14 (CUL); IEC61010-1

RoHS compliant

INPUTS & OUTPUTS

1x digital output

1x digital/analog input (one active)

WARRANTY


3 years on design and manufacturing defects

All specifications are subject to change.

Consult the company website for more information.

ORDERING GUIDE

PART NUMBER	DESCRIPTION
RAM-6021	Secure router with 5 Ethernet ports, 1 serial port, Modbus/DNP3 gateway
ET-PS-024-02	DIN rail 2 amp power supply
EPSALACADAPTER2	2 5mm harrel nower supply

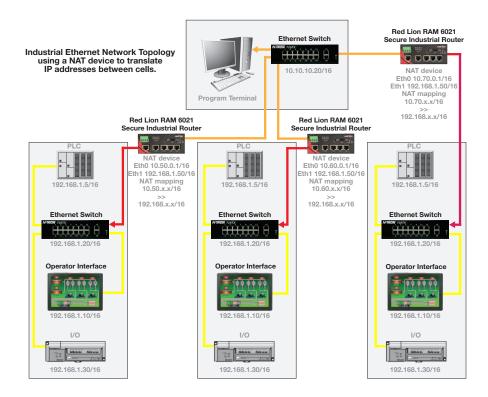



1.00" [2.54cm]

www.redlion.net

Connect. Monitor. Control.

Americas sales@redlion.net

Asia-Pacific asia@redlion.net

Europe Middle East **Africa**

europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0376 082616 © 2016 Red Lion Controls, Inc. All rights reserved, Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.