

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







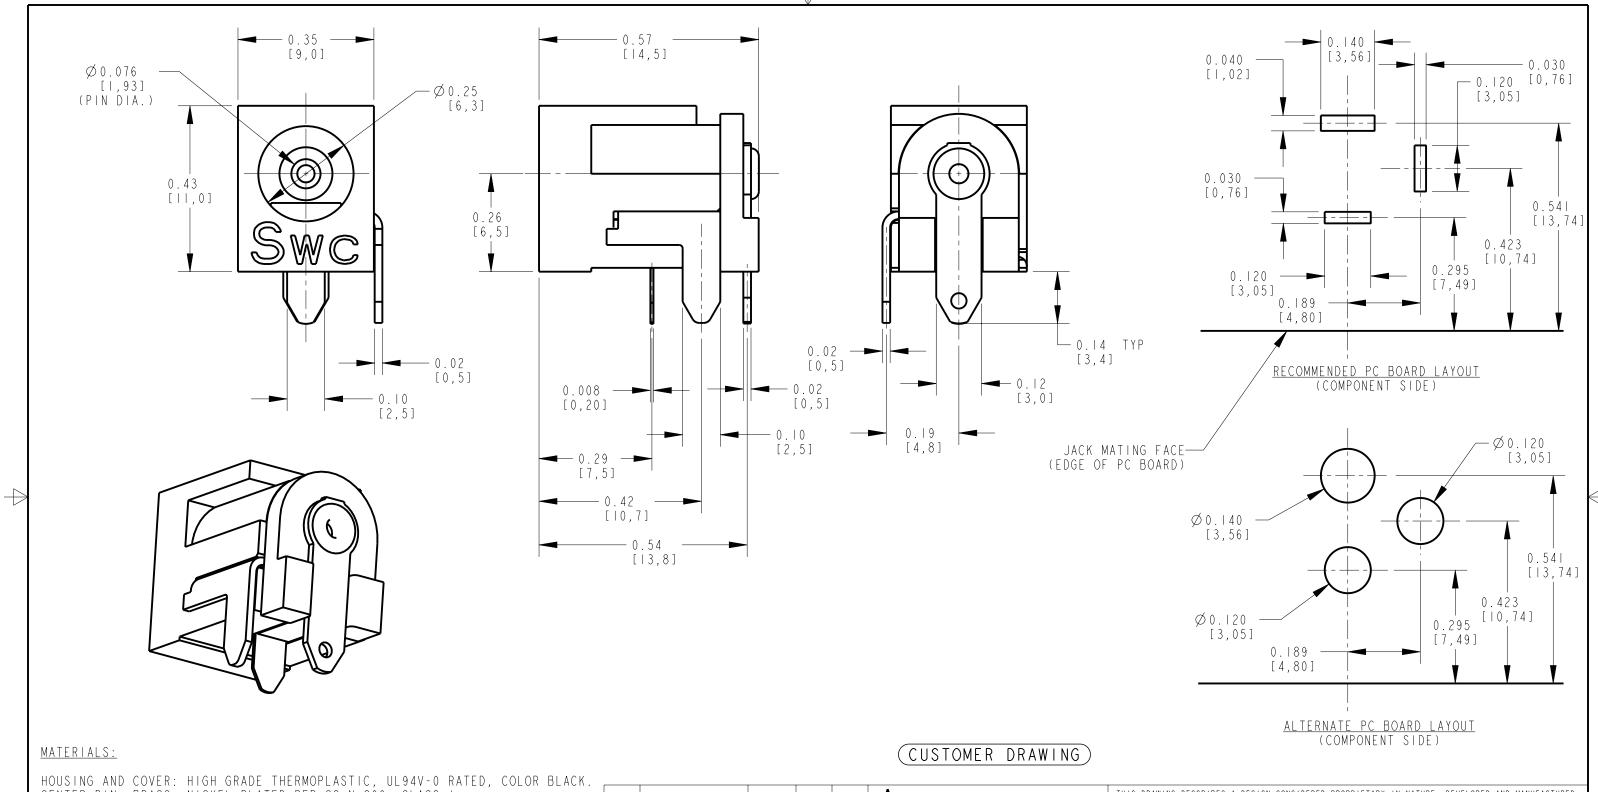

CENTER PIN: BRASS, NICKEL PLATED PER QQ-N-290, CLASS I. PIN AND SHUNT TERMINALS: BRASS, SILVER PLATED PER QQ-S-365 SLEEVE SPRING: SPRING COPPER ALLOY, SILVER PLATED PER QQ-S-365.

SPECIFICATIONS:

LIFE: 5000 CYCLES. INSERTION FORCE: 5 LB [2.3 KG] MAX. WITHDRAWAL FORCE: 0.5 LB [0.2 KG] MIN. CONTACT RESISTANCE: 30 MILLIOHM MAX, 60 MILLIOHM MAX. AFTER TEST. INSULATION RESISTANCE: 30 MEGAOHM MÍN. @ 100VDC. DIELECTRIC WITHSTANDING VOLTAGE: 250VAC FOR I MINUTE. CURRENT (CARRYING): 5A.

					STAR SYMBOL DENOTES CRITICAL DIMENSION	THIS DRAWING BY SWITCHCRAF	DESCRIE T INC.	BES A DESIGN CO AND IS RELEASE	ONSIDERED PRO D ON A CONFI	PRIETARY IN 1 DENTIAL BASIS	NATURE, DEVELOPED S FOR IDENTIFICATI	AND MANUFACTURED ON PURPOSES ONLY.
					UNLESS OTHERWISE SPECIFIED	SIZE	W	IDTH	MULT	Lf	BS/M	TEMPER
					I. ALL DIMENSIONS IN INCHES -TWO PLACE DECIMALS ±0.01	FINISH				MATERIAL		
Н	22891	6-15-99	TJK	TJK	-THREE PLACE DECIMALS ±0.005 -FRACTIONAL DIMENSIONS ±1/64	SPEC No.				SPEC No.		
G	21359	9-18-96	SG	MA	-ANGLES ±1° -ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.	FIRST USED ON SCALE 4:1			Swileheraft*			
F	21077	8-28-96	DA	MA	2. FEATURES ON THE SAME CENTERLINE	DATE DRAWN	ВҮ	CHKD	APVD			
E	20441	11-8-95	МА	MA	MUST BE ALIGNED WITHIN ±0.002 3. REMOVE ALL BURRS	4-27-95 MA		SG 1-8-96	MA 1 - 8 - 96	S	HEET (DF
REV	ECO NUMBER	DATE	ВҮ	APVD		NAME POWER JACK, PC MOUNT			PART No.		REV	
REVISIONS					DO NOT SCALE DRAWING	0.08 [2,0mm] PIN				RAPC/22 H		