

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM



RAZ52211DM (Black)



RAZ52212DM (White)

## **Features:**

- 2x LTE 644-2700MHz (MiMo)
- 0, 1x, 2x or 3x WiFi 2.4/5GHz
- DSRC
- · GNSS Active:
  - · Beidou, GPS, Glonass
  - RHCP polarization
  - · Amplifier Gain 30dBi
- Size: 88.5 x 195.1 x 92.6mm
   3.48 x 7.68 x 3.65 in
- Power withstanding 45W
- Available Models
- RAZ32011DM = 3 Cable, Black RAZ32012DM = 3 Cable, White RAZ42111DM = 4 Cable, Black RAZ42112DM = 4 Cable, White RAZ52211DM = 5 Cable, Black RAZ52212DM = 5 Cable, White RAZ62311DM = 6 Cable, Black RAZ62312DM = 6 Cable, White

## **Applications:**

- Vehicular use Telematics
- Fleet management
- Trucking
- Navigation, GIS and survey
- Public safety
- Search and Rescue
- Metering, Utility boxes

Issue: 1827

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **ELECTRICAL SPECIFICATIONS**

Monopolo, mododiod on 2 1.02m (10 / grodina	Antenna Type	Monopole, meas	sured on Ø1.02m (40") ground pla	ane
---	--------------	----------------	----------------------------------	-----

Frequency (2x LTE) 644-960/1710-2700 MHz
Frequency (1x, 2x or 3x WiFi) 2400-2500/4900-5925 MHz

Nominal Impedance50 ΩVSWR2:1Radiation PatternOmniHPBW / Vertical Plane (LTE, 644-960)42°HPBW / Vertical Plane (LTE, 1710-2700)31°HPBW / Vertical Plane (WIFI, 2400-2500)25°HPBW / Vertical Plane (WIFI, 4900-5925)20°

Polarization Vertical

Average Peak Gain (LTE, 644-960) (LTE, 1710-2700) 4.6/4.9 dBi

Average Peak Gain (WIFI, 2400-2500) (WIFI, 4900-5925) 6/6.6 dBi

Isolation (LTE1 to LTE2) <-13
Isolation (WiFi1/2, WiF2/3 & WiFi1/3) <-13
Average Efficiency (LTE) 67 %
Average Efficiency (WiFi) 57 %

Power Withstanding 45 W

## GNSS Beidou-GPS-Glonass

Frequency 1561.098±2.046,1575.42±1.023,1602.5625±4 MHz

VSWR 2:1 Nominal Impedance 50  $\Omega$ 

Gain (Radiating element) 1 dBic +/- 1dB Gain (LNA gain) 30 dB +/- 2 dB

Polarization RHCP







**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **ELECTRICAL SPECIFICATIONS**

Out of Band Rejection 960MHz >65 dB, 1710MHz >60 dB,

2170MHz >65 dB, 2400MHz >65 dB

Noise Figure < 2.4dB

Operating Voltage  $3.3 - 5 \text{ Vdc} \pm 0.5 \text{ V}$ 

Current Consumption < 11 mA

## **MECHANICAL SPECIFICATIONS**

Length/Height/Width 195.1mm (7.68")/92.6 (3.65")/88.5mm (3.48")

Weight 856 g (1.9 lbs)

Antenna Color / Material Black or White / PC/ABS, UV protected

Cable / Connector 2x LTE, 5.2m (17') LMR-195/SMA-Male

1x, 2x or 3x WiFi, 5.2m (17') LMR-195/RP-SMA-Male

GNSS, 5.2m (17') RG-174/SMA-Male

Mounting Configuration Ø22.3mm (7/8") Hole required

## **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature -40/+85° C

Ingress Protection IP67
RoHS Compliant Yes

## **OTHER SPECIFICATIONS**

Total cable assembly loss for 5.2m (17') LMR-195 @ 850MHz	2.1 dB
Total cable assembly loss for 5.2m (17') RG-174 @ 1575MHz	6.0 dB
Total cable assembly loss for 5.2m (17') LMR-195 @ 1930MHz	3.2 dB
Total cable assembly loss for 5.2m (17') LMR-195 @ 2500MHz	3.7 dB
Total cable assembly loss for 5.2m (17') LMR-195 @ 2450MHz	3.6 dB
Total cable assembly loss for 5.2m (17') LMR-195 @ 5350MHz	5.5 dB






**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **MECHANICAL DRAWING**

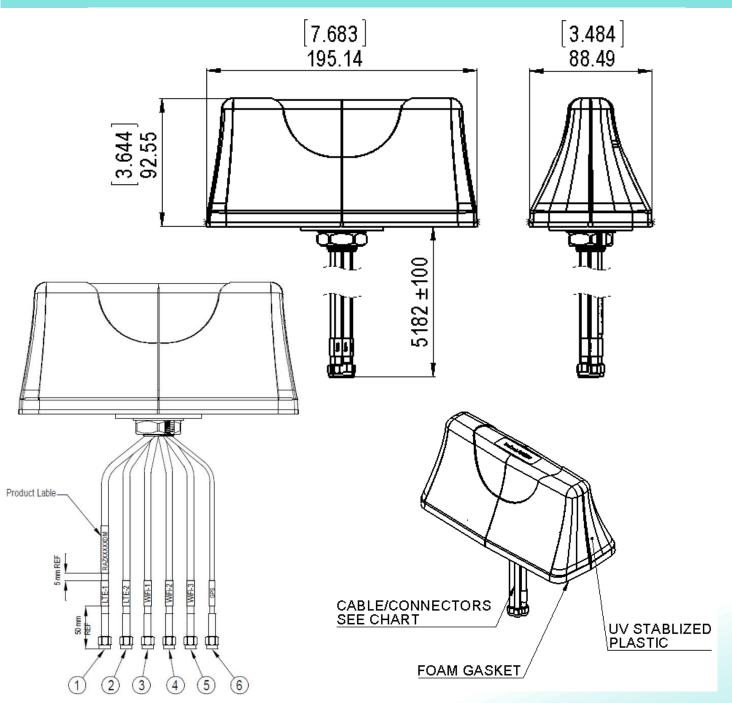

All dimensions are in mm / inches

Issue: 1827

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **MECHANICAL DRAWING**

Vehicular Multiband Antenna with Direct Mount

(Part Number)



















1	Product ID: RAZORBACK				
2	Total Number of Cable leads				
3	Total Number of LTE Cable Leads				
4	Total Number of WiFi Cable Leads				
(5)	Total Number of GPS Cable Leads				
	The Color of the Plastic Housing				
6	1=Black; 2= White				
7	Mounting: Direct Mount; 7/8" Hole Required				

RAZXXXXXDM		CABLE	CABLE LENGTH	CONNECTOR	
1	LTE-1 Cable Assy			CMA Mala	
2	LTE-2 Cable Assy				SMA Male
3	WiFi-1 Cable Assy	LMR195	5181 mm /	RP-SMA Male	
4	WiFi-2 Cable Assy		204" /		
5	WiFi-3 Cable Assy		17 FT		
6	GPS Cable Assy	RG-174		SMA Male	

All dimensions are in mm / inches





**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi


**Direct Mount** 

Series: RAZORBACK

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**


## **VSWR vs Frequency** RAZ62311DM Measured with 17' cables on Ø40" GP

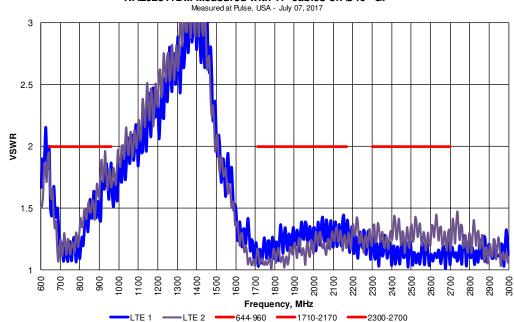

LTE 1 & 2 Measured with 5.2m (17') cable

#### Return loss vs Frequency RAZ62311DM Measured with 17' cables on Ø40" GP

644-960

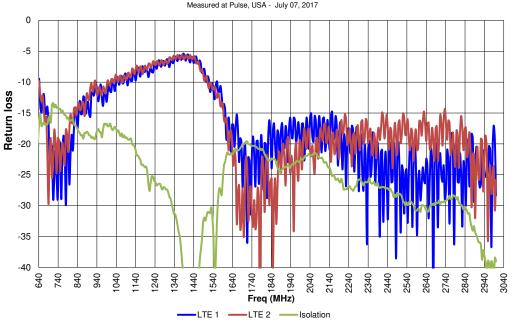

LTE 1 & 2 Measured with 5.2m (17') cable



Description: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

Series: RAZORBACK


Measured with 5.2m

(17') cable


PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

#### **VSWR vs Frequency** RAZ62311DM Measured with 17' cables on Ø40" GP (WiFi 1, 2 &3)

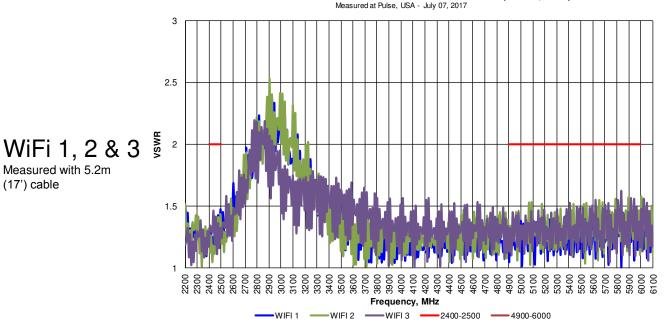

#### Return loss vs Frequency RAZ62311DM Measured with 17' cables on Ø40" GP (WiFi 1, 2 &3)

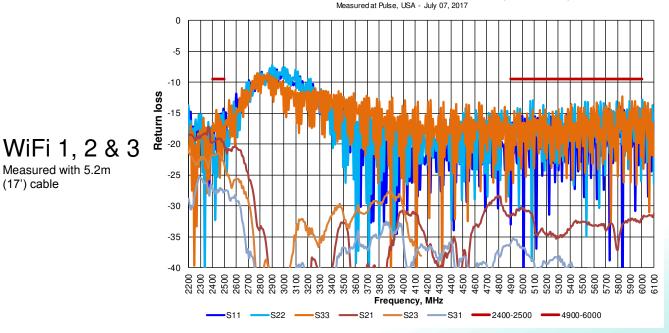

Issue: 1827

Measured with 5.2m

(17') cable



**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 


Series: RAZORBACK

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

#### Peak Gain vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (LTE 1)

Measured at Pulse, USA - Aug 04, 2017

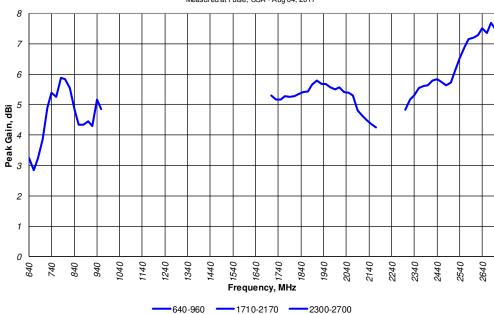


ITF 1 Measured with 102mm (4") cable

#### Efficiency vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (LTE 1)

640-960

Measured at Pulse, USA - aUG 04, 2017

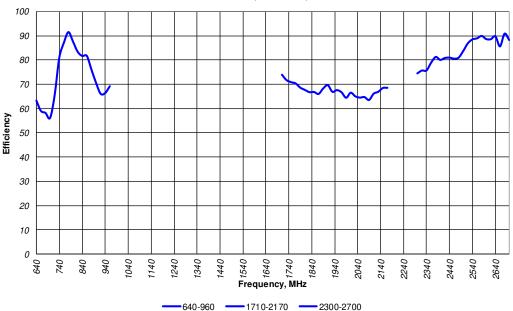

LTE<sub>1</sub> Measured with 102mm (4") cable




Description: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

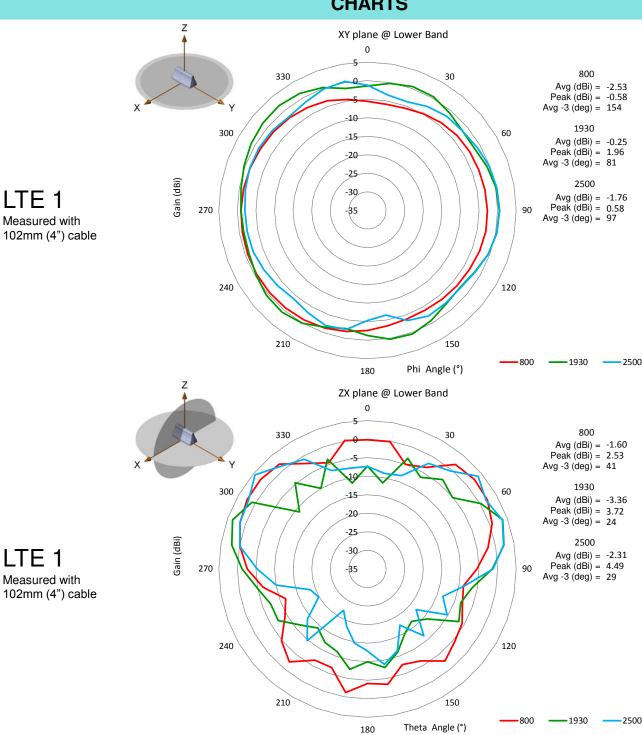



**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 


Series: RAZORBACK

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

#### Peak Gain vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (LTE 2)

Measured at Pulse, USA - Aug 04, 2017

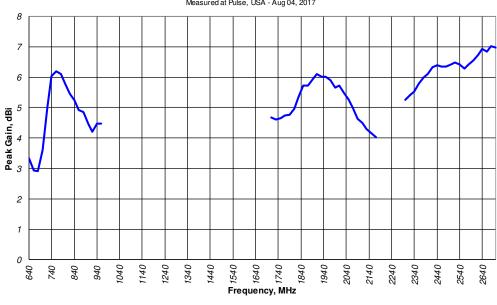


ITF 2 Measured with 102mm (4") cable

#### Efficiency vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (LTE 2)

640-960

Measured at Pulse, USA - aUG 04, 2017

**-**1710-2170 **--**2300-2700

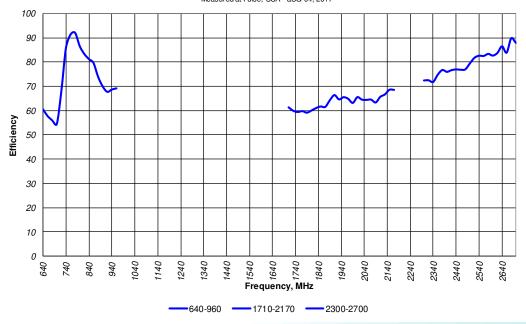

LTE<sub>2</sub> Measured with 102mm (4") cable

Issue: 1827



Description: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

#### **CHARTS** XY plane @ Lower Band 0 800 330 30 Avg (dBi) = -3.21Peak (dBi) = -1.25Avg - 3 (deg) = 145-10 1930 300 60 Avg (dBi) = 0.00Peak (dBi) = 2.17 -20 Avg - 3 (deg) = 1492500 LTE<sub>2</sub> -30. Avg (dBi) = -2.64Peak (dBi) = -0.06 270 -85 Avg - 3 (deg) = 162Measured with 102mm (4") cable 240 120 210 150 800 **-**1930 -2500 Phi Angle (°) 180 ZX plane @ Lower Band 0 330 800 30 Avg (dBi) = -1.75Peak (dBi) = 2.78 Avg -3 (deg) = 42300 Avg (dBi) = -3.00Peak (dBi) = 5.07 -20 Avg -3 (deg) = 262500 -30 LTE 2 Avg (dBi) = -1.70Peak (dBi) = 6.13 270 85 Avg - 3 (deg) = 29Measured with 102mm (4") cable 240 210 150 1930 2500 800

Issue: 1827



180

Theta Angle (°)



Description: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 


**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

#### Peak Gain vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (WiFi 1)


Measured at Pulse, USA - Aug 04, 2017

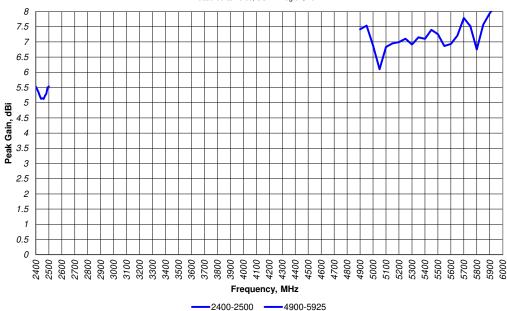

WiFi 1
Measured with
102mm (4") cable

# Efficiency vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (WiFi 1)

Measured at Pulse, USA - Aug 04, 2017

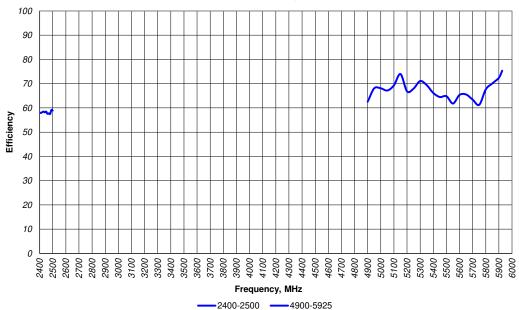

WiFi 1
Measured with
102mm (4") cable

Issue: 1827

ROHS




**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

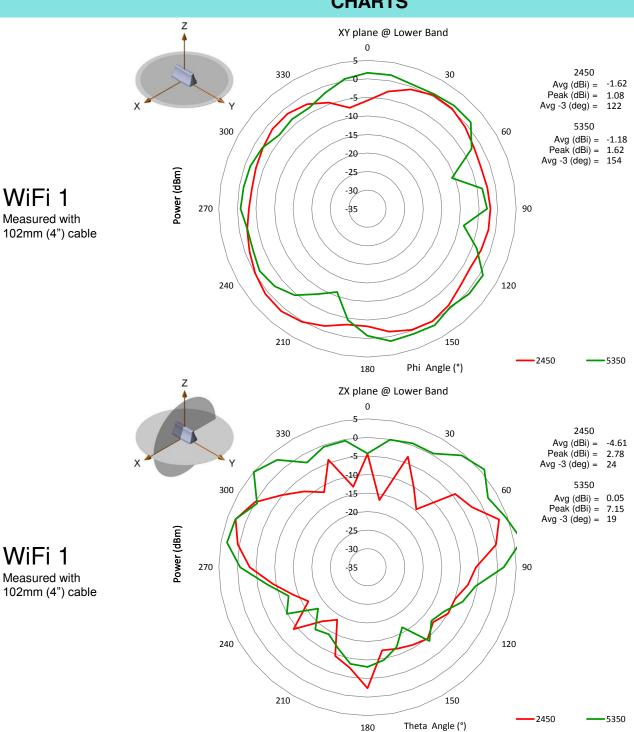

Issue: 1827

ROHS



Description: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 


Series: RAZORBACK

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

#### Peak Gain vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (WiFi 2)


Measured at Pulse, USA - Aug 04, 2017

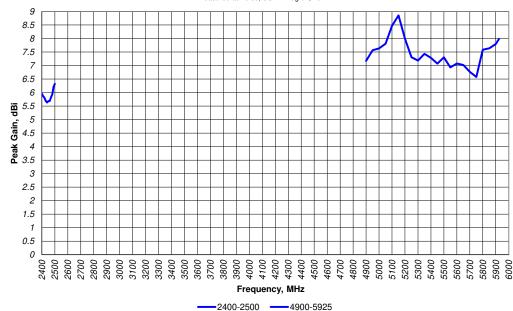

WiFi 2 Measured with 102mm (4") cable

## Efficiency vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (WiFi 2)

Measured at Pulse, USA - Aug 04, 2017

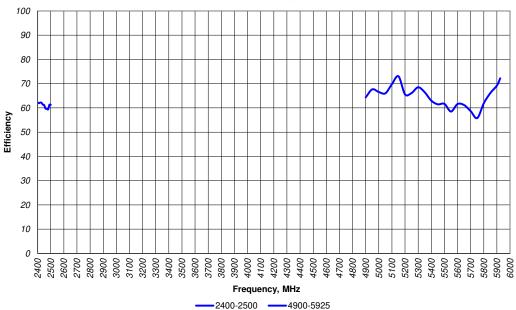

WiFi 2 Measured with 102mm (4") cable

Issue: 1827




**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

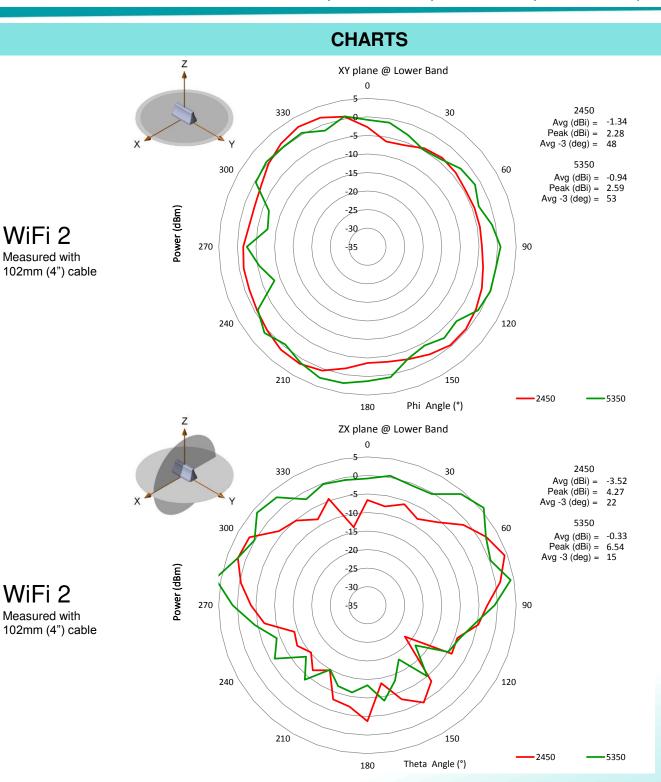

Issue: 1827

ROHS



Description: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 


**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

#### Peak Gain vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (WiFi 3)

Measured at Pulse, USA - Aug 04, 2017

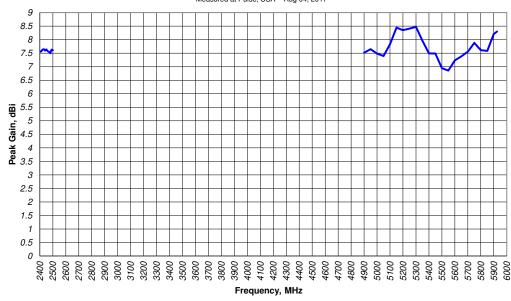


WiFi 3
Measured with
102mm (4") cable

# Efficiency vs Frequency RAZ62311DM Measured with 4" cables on Ø40" GP (WiFi 3)

**2**400-2500 **—**4900-5925

Measured at Pulse, USA - Aug 04, 2017

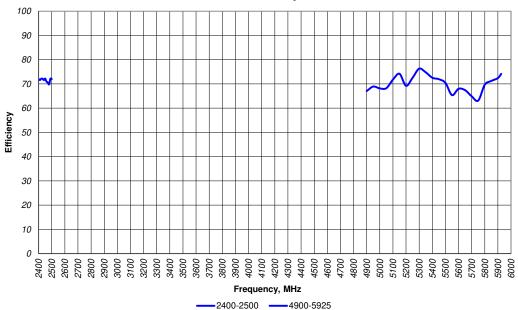

WiFi 3
Measured with
102mm (4") cable

Issue: 1827

ROHS




**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

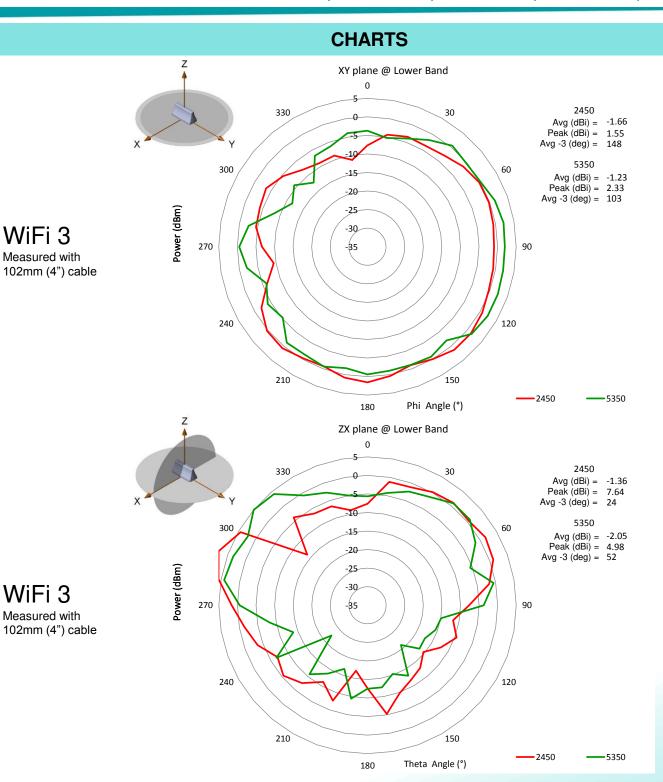

Issue: 1827

ROHS



**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi


**Direct Mount** 


Series: RAZORBACK

PART NUMBER: RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **CHARTS**

## GNSS LNA Gain and out-of-band rejection

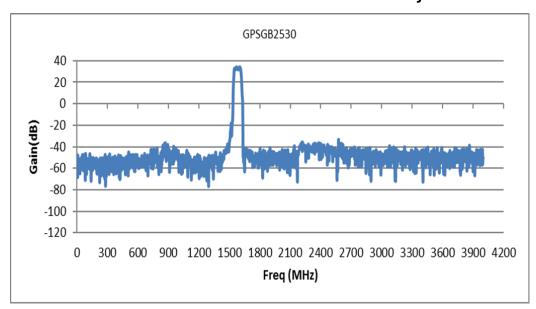

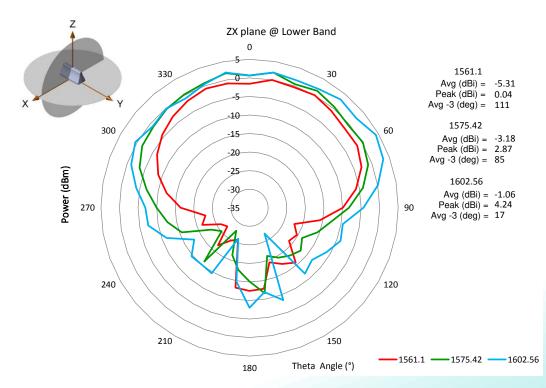

**GNSS** 

**Passive** Measurement Measured with 152mm (6") cable

Issue: 1827



**Description**: GNSS/2x LTE/0, 1x, 2x or 3x WiFi

**Direct Mount** 

**Series: RAZORBACK** 

**PART NUMBER:** RAZ32011DM, RAZ32012DM, RAZ42111DM, RAZ42112DM, RAZ52211DM, RAZ52212DM, RAZ62311DM, RAZ62312DM

## **PACKAGING**

1pcs antennas per foam bag

6pcs antennas per package box

Total 6pcs antenna per package box

Package box: 558mm\*386mm\*210mm