



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**SCHEMATIC**

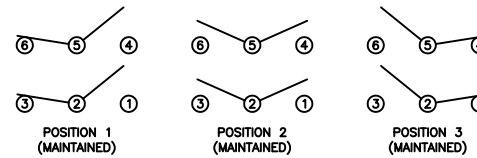

**SPECIFICATIONS**

**FUNCTION:**  
2P2T ON-OFF-ON

**RATINGS:**  
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):  
16A 125VAC [cURus]  
16A 250VAC [cURus]

**CONTACT RESISTANCE:**  
Initial: 20mΩ Max.




**INSULATION RESISTANCE:**  
100MΩ Min. at 500VDC

**DIELECTRIC STRENGTH:**  
1,000VAC For 1 Minute

**ELECTRICAL LIFE:**  
6,000 Cycles [cURus]

**TEMPERATURE:**  
-20°C to 65°C [cURus]

**APPROVALS:**  
 **RoHS COMPLIANT**

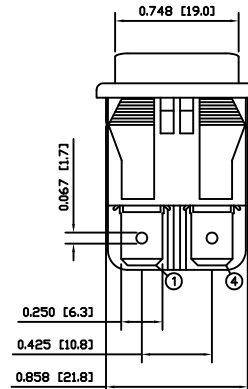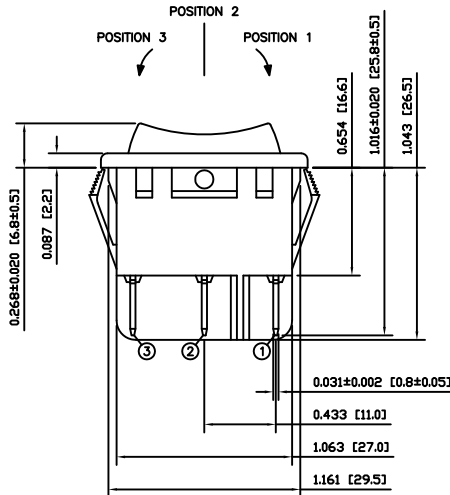

**COLORS AND MARKINGS**

**BODY:**  
Black

**ACTUATOR:**  
Black

**MARKING:**  
None

**MARKING COLOR:**  
None

**MATERIALS**

**BODY:**  
Polyamide 6/6 (PA66), UL94 V-2


**ACTUATOR:**  
Polyamide 6/6 (PA66), UL94 V-2

**SPRING:**  
Plano Wire

**CONTACTS:**  
Silver Alloy

**TERMINALS:**  
Silver Plated Copper  
Silver Plated Brass

**SUGGESTED PANEL CUTOUT**



| PANEL THICKNESS         | X            |
|-------------------------|--------------|
| 0.030~0.049 [0.75~1.25] | 1.181 [30.0] |
| 0.049~0.079 [1.25~2.00] | 1.189 [30.2] |
| 0.079~0.118 [2.00~3.00] | 1.200 [30.5] |

| ACTUATOR       | A    | 09/07/02 | CAB |
|----------------|------|----------|-----|
| BODY           | A    | 09/07/02 | CAB |
| COLORS         | A    | 09/07/02 | CAB |
| MATERIALS      | A    | 09/07/02 | CAB |
| SPECIFICATIONS | A    | 09/07/02 | CAB |
| REFERENCE      | REV. | DATE     | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

| A    | INITIAL RELEASE | PCRD0057 | 09/07/29 | CAB      |
|------|-----------------|----------|----------|----------|
| REV. | DESCRIPTION     | PCR      | DATE     | DRAWN BY |

| DIMENSIONS           |
|----------------------|
| INCHES [MILLIMETERS] |
| GENERAL TOLERANCES   |
| ±0.008 [±0.2] / ±1'  |
| SCALE                |
| DRAWING NOT TO SCALE |

RB246E1100

|                                 |                       |               |
|---------------------------------|-----------------------|---------------|
| DRAWING NUMBER<br>14-RB246E1100 | DATE<br>JULY 29, 2009 | REVISION<br>A |
|---------------------------------|-----------------------|---------------|