



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832





Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1460068	2014/06/18	Tom	Change Panel Thickness
C	LE31490050	2014/09/03	Feng_Li	Delete Shrink Tube
D	LEN14A0070	2014/10/03	Lodess	Change the note of twisting wires

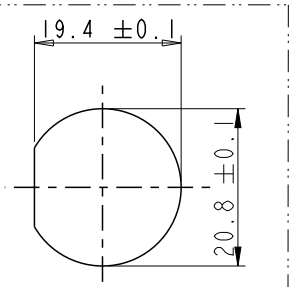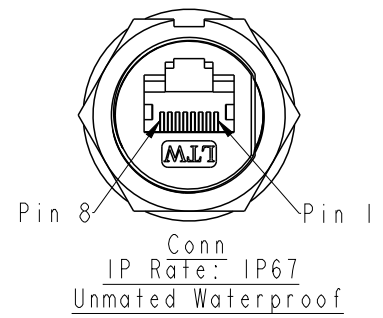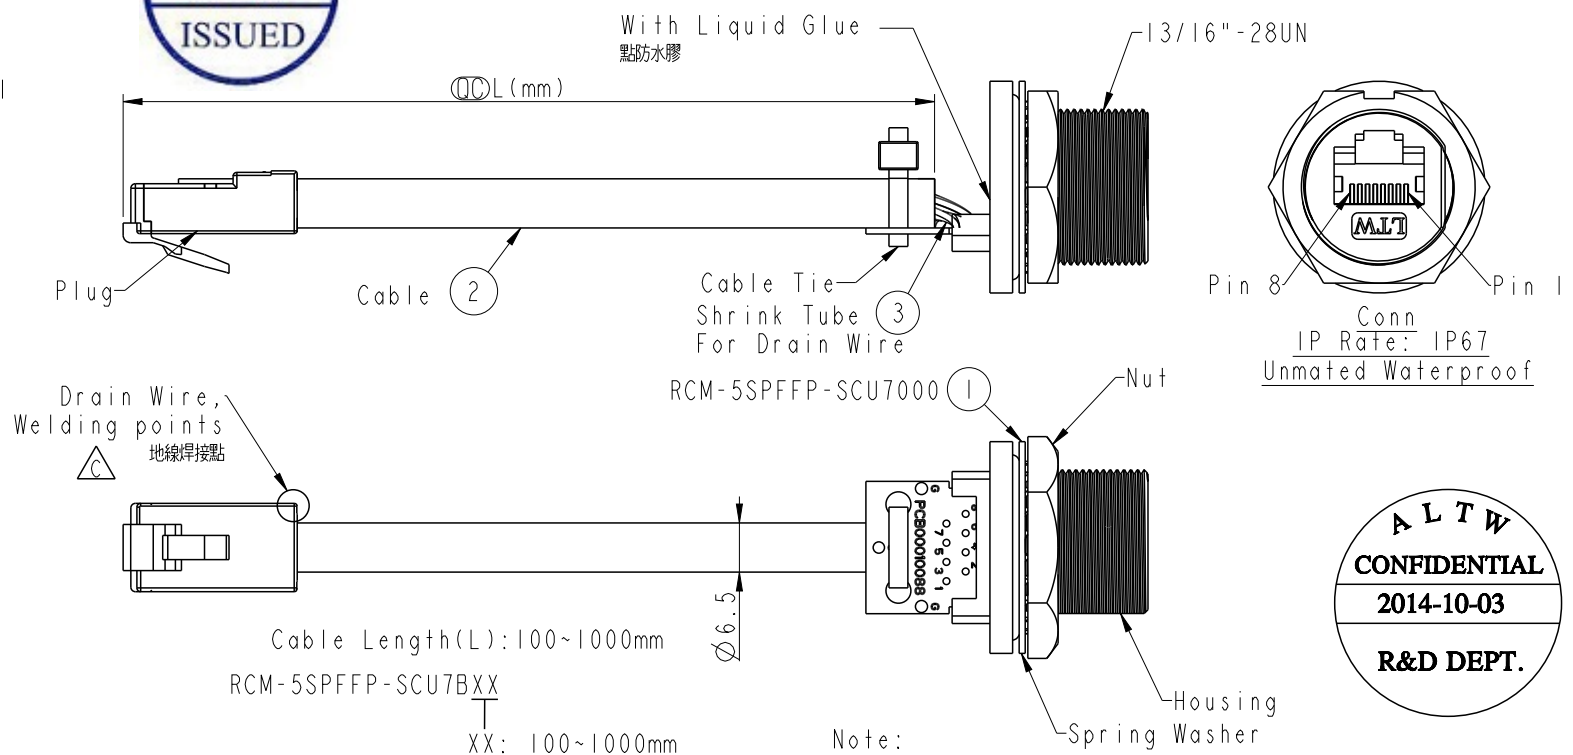

Recommended Panel Cut-Out Rear View

Shield	Drain Wire	地線	Shield
8	Borwn	棕	8
7	Brown /White	棕/白	7
6	Green	綠	6
5	Blue/White	藍/白	5
4	Blue	藍	4
3	Green/White	綠/白	3
2	Orange	橘	2
1	Orange/White	橘/白	1
Plug	Wire Color		Conn.2



Cable Length(L): 100~1000mm

RCM-5SPFFP-SCU7BXX

XX: 100~1000mm	
10: 100mm	
15: 150mm	
20: 200mm	
1	
95: 950mm	
A0: 1000mm	

Cable length	Tolerance
0.0~100 mm	±10 mm
101~300 mm	±15 mm
301~1000 mm	±20 mm

- Note:
- * Ⓞ Important Dimension
 - * Panel Nut: Zinc Alloy, Nickel Plated
 - * Spring Washer: SUS304
 - * O-Ring: Silicone, Gray_Black
 - * Housing: Zinc Alloy, Nickel Plated
 - * Use with waterproof cap or dust cap for Panel Thickness Max: 3.0mm
 - * Use without waterproof cap or dust cap for Panel Thickness Max: 4.2mm
 - * Plug: 8P8C, Gold Plated, Shielded
 - * Recommend Torque for Panel Nut: 8~10kgf-cm
 - * Cable: CAT5E FTP 24AWG*4P+My+Drain+Al/My(UV Resistant), OD=6.5mm, Black

UNIT:mm		TITLE	RJ45,C SIZE,PCB W/CABLE	
TOLERANCE	.X ±0.25	SCALE	1:1	SIZE A4
.XX ±0.1	.XXX ±0.05	REV.	D	WC-REV. A.4
ANGLES ±1°		SHEET 1 OF 1		
		Ⓞ: Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	LOD	2014/10/03
RCM-5SPFFP-SCU7BXX	Ann	2014/10/03
CUSTOMER	APPROVED BY	DATE
ALTW	Win	2014/10/03