

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








PART NO.	"A" REF.	"B"±.025 (±0.63)	"C"±.015 (±0.38)	NOMINAL BD. THKS.	"D"±.005 (±0.13)	
RDC-250	2.50 (63.5)	1.50 (38.1)	_		.080 (2.0)	
RDC-450	4.50 (114.3)	3.50 (88.9)	_	1/16 (1.6)		
RDC-600	6.00 (152.4)	5.00 (127.0)	_	1/16 (1.6)		
RDC-800	8.00 (203.2)	7.00 (177.8)	3.50 (88.9)			
RDC-450-102	4.50 (114.3)	3.50 (88.9)	=		.102 (2.6)	
RDC-600-102	6.00 (152.4)	5.00 (127.0)	_	3/32 (2.4)		
RDC-800-102	8.00 (203.2)	7.00 (177.8)	3.50 (88.9)		, ,	
RDC-450-130	4.50 (114.3)	3.50 (88.9)				
RDC-600-130	6.00 (152.4)	5.00 (127.0)	_	1/8 (3.2)	.132 (3.4)	
RDC-800-130	8.00 (203.2)	7.00 (177.8)	3.50 (88.9)	' ` '	`	



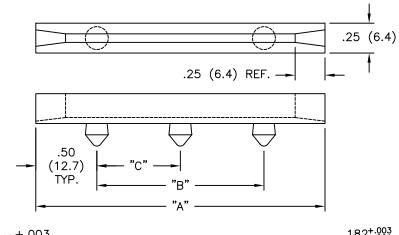

## NOTES:

- 1. MATERIAL: GLASS-FILLED NYLON (RMS-66).
- 2. COLOR: BLACK.
- 3. SLOTTING OR ELONGATING OF 2ND AND 3RD MOUNTING HOLE IS RECOMMENDED TO ALLOW FOR LENGTH VARIATIONS IN MOLDING AND ASSEMBLY EASE.

Ø.187+.003 (4.75±0.08) (4.75±0.08)	(4.6 <sup>+0.08</sup> <sub>-0.03</sub> ) TYP.
"C"±.005 (±0.13)	.25 <sup>+.003</sup> 
TYPICAL MOUNTING HOLES	
PANEL THICKNESS: .047090 (1.2-2.3)	)

Н	SEE ECN #1073 FOR CHANGES	SK	10.	11.05
G	SEE ECN #839 FOR CHANGES	SM	08.	24.04
F	CHANGED FILE NUMBER AND UPDATED PRINT	SM	01.	31.02
Ε	-130 SERIES ADDED	PB	05	0994
D	MOUNTING INSTRUCTIONS MODIFIED	ΡВ	04:	2994
С	DIM .05(1.3) ADDED MOUNTING INSTRUCTIONS	ьс	02	1694
1	MODIFIED, CHANGED TABLE	1,3	021	1094
В	NEW P/N'S ADDED	RS	01:	2494
Α	METRIC DIMS., TOL. CORRECTED	RS	80	1892
REV	DESCRIPTION	ENG	3R	DATE

02	TITLE: DE	EEP	CHANNEL	CAF	RD GUIDE	(RDC)	<del>{ ( + ) +   +   -   -   +                      </del>	OWG IN N(mm)
'4	TOLERANCES	FILE #	RDC		DWN: J.B.	APP:	l F	INAL
14	UNLESS NOTED	MAT'L:	SEE NOTES		DT: 04-08-97	DT:	PART #	PRINT
14	.XX=±.010 .XXX=±.005	RE:	RICHCO, INC.		RICHC		CEE TA	NRIF TYPE
2	FRAC=1/64		Mondo, mo.		PO BOX 804238,	CHICAGO,60680	JULL 17	,
TE	ANG=1*				(773) 53	9-4060		