



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

Regulated Converters

- 10W in 2" x 1" Package
- 2kVDC and 3kVDC Isolation Options
- 2:1 or 4:1 Input Voltage Range
- Continuous Short Circuit Protection (power limiting)
- Synchronous Rectification on all Del outputs
- Full SMD internal design
- Remote Control Pin
- Efficiency to 87%

Description

The REC10-xxxxS_D/M -series offer single and dual regulated outputs in a 2"x1" package with 2kVDC or 3kVDC isolation options and are suitable for higher power industrial applications. Remote on/off control is standard. The converters can deliver 150% rated power for short periods of time to cope with applications with large capacitive loads or high start up currents.

Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (typ.) (%)	Max. Cap. Load
REC10-xx3.3S/H*/M	9-18, 18-36, 36-75	3.3	2000	83-84	2200 μ F
REC10-xx05S/H*/M	9-18, 18-36, 36-75	5	2000	86-87	2200 μ F
REC10-xx12S/H*/M	9-18, 18-36, 36-75	12	833	85-86	2200 μ F
REC10-xx15S/H*/M	9-18, 18-36, 36-75	15	667	85-86	2200 μ F
REC10-xx05D/H*/M	9-18, 18-36, 36-75	\pm 5	\pm 1000	82-83	\pm 1000 μ F
REC10-xx12D/H*/M	9-18, 18-36, 36-75	\pm 12	\pm 416	85-86	\pm 1000 μ F
REC10-xx15D/H*/M	9-18, 18-36, 36-75	\pm 15	\pm 333	85-86	\pm 1000 μ F
REC10-xx3.3SZ/H*/M	9-36, 18-75	3.3	2000	82	2200 μ F
REC10-xx05SZ/H*/M	9-36, 18-75	5	2000	86	2200 μ F
REC10-xx12SZ/H*/M	9-36, 18-75	12	833	85	2200 μ F
REC10-xx15SZ/H*/M	9-36, 18-75	15	667	86	2200 μ F
REC10-xx05DZ/H*/M	9-36, 18-75	\pm 5	\pm 1000	82	\pm 1000 μ F
REC10-xx12DZ/H*/M	9-36, 18-75	\pm 12	\pm 416	85	\pm 1000 μ F
REC10-xx15DZ/H*/M	9-36, 18-75	\pm 15	\pm 333	86	\pm 1000 μ F

* Standard is /H2 for 2kVDC isolation, use /H3 for 3kVDC Isolation

2:1

xx = 9-18Vin = 12,
xx = 18-36Vin = 24,
xx = 36-75Vin = 48

4:1

xx = 9-36Vin = 24,
xx = 18-75Vin = 48

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range	2:1 or 4:1	
Input Filter	PI Network	
Output Voltage Accuracy (the Output 3.3V is \pm 1.2% max.)	\pm 1.0% max.	
Line Voltage Regulation	\pm 0.3% max.	
Load Voltage Regulation	Single	\pm 0.5% max.
(25% to 100% full load)	Dual	\pm 1.2% max.
Cross Regulation (100%: 25% to 100% full load)	\pm 5% max.	
Output Ripple and Noise (with 100n output capacitor and 20MHz BW)	100mVp-p max.	
Start-up time (Nom. Vin at 100% Load)	25ms typ.	
Operating Frequency (Full Load)	300kHz typ.	
Efficiency (Nom. Vin at 100% Load)	see Selection Guide	
Minimum Load	0%	
Input Surge Voltage (100ms max.)	12V Input	36VDC
	24V Input	50VDC
	48V Input	100VDC

continued on next page

ECONOLINE

DC/DC-Converter

with 3 year Warranty

RECOM

10 Watt 2" x 1" Single & Dual Output



EN-60950-1 Certified
EN-60601-1 Certified
UL-60950-1 Certified

REC10/M

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes


Specifications cont. (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Isolation Voltage	H2-Suffix	(tested for 1 second)	2000VDC
		(rated for 1 minute)	1000VAC / 60Hz
	H3-Suffix	(tested for 1 second)	3000VDC
		(rated for 1 minute)	1500VAC / 60Hz
Under Voltage Lockout (2:1)	12V Input	DC-DC on 8.3VDC, DC-DC off 7.9VDC	
	24V Input	DC-DC on 17.4VDC, DC-DC off 16.7VDC	
	48V Input	DC-DC on 35.7VDC, DC-DC off 34.3VDC	
Under Voltage Lockout (4:1)	24V Input	DC-DC on 8.3VDC, DC-DC off 7.9VDC	
	48V Input	DC-DC on 17.4VDC, DC-DC off 16.7VDC	
Isolation Capacitance			1200pF typ.
Isolation Resistance			1 G Ω min.
Overload Protection			150% typ.
Short Circuit Protection			Continuous, Auto Restart
Operating Temperature Range	4:1		-40°C to +71°C (see Graph)
(free air convection)	2:1		-40°C to +81°C (see Graph)
Storage Temperature Range			-55°C to +105°C
Remote On/Off	DC/DC ON	Open or $3.5\text{V} < V_r < 12\text{V}$	
	DC/DC OFF	Short or $0\text{V} < V_r < 1.2\text{V}$	
Temperature Coefficient			$\pm 0.05\%$ max.
Relative Humidity			95% RH
Case Material		Nickel Plated Metal with Non-Conductive Base	
Thermal Impedance	Natural convection		12°C/W
Maximum Case Temperature			100°C
Vibration		10-55Hz, 2G, 30mins along X,Y & Z	
Package Weight			27g
Packing Quantity			10 pcs per Tube
MTBF (+25°C)	Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	>1000 x 10 ³ hours
(+71°C)		using MIL-HDBK 217F	>250 x 10 ³ hours
Certifications			
EN General Safety	Report: SPCLVD1211033-2		EN60950-1:2006 + A12:2011
UL General Safety	Report: E224736		UL 60950-1 1st Ed. C22.2 No. 60950-1-03
EN Medical Safety	Report: MDD12060585 + RM1206085		
	IEC/EN 60601-1 3rd Edition; Medical Report + ISO14971 Risk Assessment		


Note: Refer to Application Notes for EMC Class B Filter suggestion

Derating-Graph (Ambient Temperature)



2:1 Converters

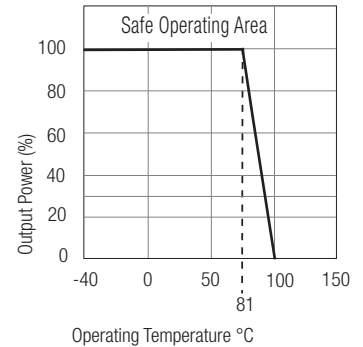

4:1 Converters

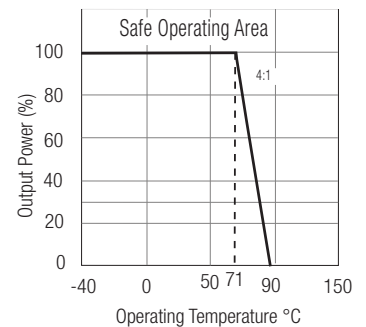

Package Style and Pinning (mm)




Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Com
5	-Vout	-Vout
6	CTRL	CTRL

XX.X ± 0.5 mm
XX.XX ± 0.35 mm

2" x 1" Package

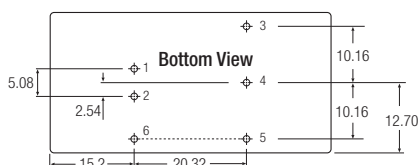

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.