



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Features

- Reinforced Insulation for 250VAC Working Voltage
- Clearance and Creepage Distance: 8mm
- 5kVAC I/P to O/P 2MOPP Isolation
- 2µA Patient Leakage Current
- Industry Standard Pinout
- 2:1 and 4:1 Wide Input Range

# Regulated Converters


## Description

The REM3 series of medical grade regulated DC/DC converters features reinforced 5kVAC/1 minute isolation with low 2µA leakage and are 60601-1 3rd Ed. certified for 250VAC continuous working. The compact DIP24 package offers tightly regulated single and dual outputs, even under no-load conditions. The outputs are short circuit and overload protected. The converters are available in two different pinning options and optionally with an external control pin for standby consumption as low as 12.5mW. The converters are fully certified to CB, IEC/EN and ANSI/AAMI standards and carry the UL mark.

## Selection Guide

Part Number	nom. Input Voltage <sup>(1)</sup> [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. [%]	Max. Capacitive Load [µF]
REM3-xx3.3S/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	3.3	1000	81 / 82 / 82 / 81	1050
REM3-xx05S/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	5	600	84.5 / 84.5 / 84.5 / 84	780
REM3-xx12S/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	12	250	85.5 / 87 / 87 / 87	130
REM3-xx15S/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	15	200	87.5 / 87 / 87 / 86.5	100
REM3-xx24S/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	24	125	85.5 / 87 / 87 / 86.5	39
REM3-xx05D/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	±5	±300	83 / 83.5 / 83 / 83	±430
REM3-xx12D/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	±12	±125	86 / 87.5 / 86 / 86	±75
REM3-xx15D/ <sup>(3,4)</sup>	5 / 12 / 24 / 48	±15	±100	86 / 86.5 / 86 / 86	±56
REM3-xx3.3SW/ <sup>(3,4)</sup>	24 / 48	3.3	1000	82 / 81	1050
REM3-xx05SW/ <sup>(3,4)</sup>	24 / 48	5	600	84.5 / 84	750
REM3-xx12SW/ <sup>(3,4)</sup>	24 / 48	12	250	87 / 87	130
REM3-xx15SW/ <sup>(3,4)</sup>	24 / 48	15	200	87 / 86.5	100
REM3-xx24SW/ <sup>(3,4)</sup>	24 / 48	24	125	87 / 86.5	39
REM3-xx05DW/ <sup>(3,4)</sup>	24 / 48	±5	±300	83 / 83	±430
REM3-xx12DW/ <sup>(3,4)</sup>	24 / 48	±12	±125	87 / 86	±75
REM3-xx15DW/ <sup>(3,4)</sup>	24 / 48	±15	±100	86 / 86	±56

## Model Numbering

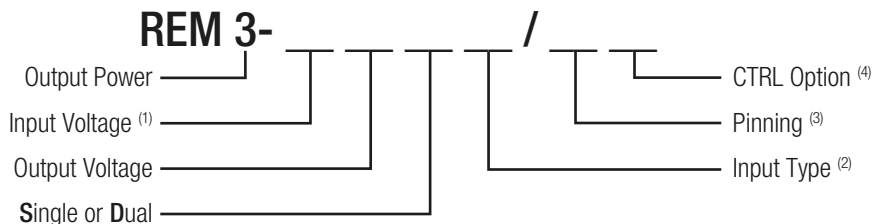

### Notes:

Note1: for 4:1 Input Voltage Type add "W", see Note 2.

2:1	nom. Vin	4:1 "W"	nom. Vin
xx= 4.5-9 Vin	= "05"	xx= 9-36Vin	= "24"
xx= 9-18Vin	= "12"	xx= 18-75Vin	= "48"
xx= 18-36Vin	= "24"		
xx= 36-75Vin	= "48"		

Note2: Blank for Standard 2:1 Input Voltage Range; „W" suffix for 4:1 Input Voltage Range

Note3: „A" suffix for A pinning; „C" suffix for C pinning, for more details refer to Package Style and Pinning

Note4: „CTRL" suffix for control pin option, for A pinning only, for C pinning not available

### Examples:

REM3-0512D/A	=	2:1 Input, 4.5-9Vin, ±12Vout,	pinout „A",	without control pin
REM3-1215S/C	=	2:1 Input, 9-18Vin, 15Vout,	pinout „C",	without control pin
REM3-4815SW/A/CTRL	=	4:1 Input, 36-75Vin, 15Vout,	pinout „A" with control pin	
REM3-243.3SW/C	=	4:1 Input, 9-36Vin, 3.3Vout,	pinout „C",	without control pin

## REM3

**3 Watt**  
**2:1 & 4:1**  
**DIP24**  
**Single and Dual Output**



**2MOPP 250VAC**

IEC-60601-1 Certified  
 ES-60601-1 Certified  
 EN-55011 Certified  
 EN-55022 Certified

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)


BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Absolute Maximum Input Voltage (3sec max.)	2:1 5Vin nom. 12Vin nom. 24Vin nom. 48Vin nom.			16VDC 25VDC 50VDC 100VDC
	4:1 24Vin nom. 48Vin nom.			50VDC 100VDC
Under Voltage Lockout	2:1 5Vin nom. 12Vin nom. 24Vin nom. 48Vin nom.	4VDC 8VDC 16VDC 33VDC		4.5VDC 9VDC 18VDC 36VDC
	4:1 24Vin nom. 48Vin nom.	8VDC 16VDC		9VDC 18VDC
Start-up Time	constant resistive load, Power up or Remote ON/OFF		30ms	
Remote ON/OFF (referenced to -Vin Pin)	DC-DC ON DC-DC OFF		Open or 0-1.2VDC 2.2-12VDC	
Current of CTRL Pin		-0.5mA		1mA
Remote OFF Input Current			2.5mA	
Internal Operating Frequency		135kHz	150kHz	165kHz
Output Ripple and Noise (20MHz BW limited)	10µF/25V X7R MLCC for 3.3, 5Vout 10µF/25V X7R MLCC for 12, 15Vout 4.7µF/50V X7R MLCC for 24Vout		30mVp-p 40mVp-p 50mVp-p	

## Efficiency

Table1: Efficiency Crosstable

		Efficiency Crosstable [%] @ full load					
		Input Voltage					
		5	12	24	48	24W	48W
Output Voltage	3.3S	81	82	82	81	82	81
	05S	84.5	84.5	84.5	84	84.5	84
	12S	85.5	87	87	87	87	87
	15S	87.5	87	87	86.5	87	86.5
	24S	85.5	87	87	86.5	87	86.5
	05D	83	83.5	83	83	83	83
	12D	86	87.5	86	86	87	86
	15D	86	86.5	86	86	86	86

Graph1: Efficiency Factor vs. Load

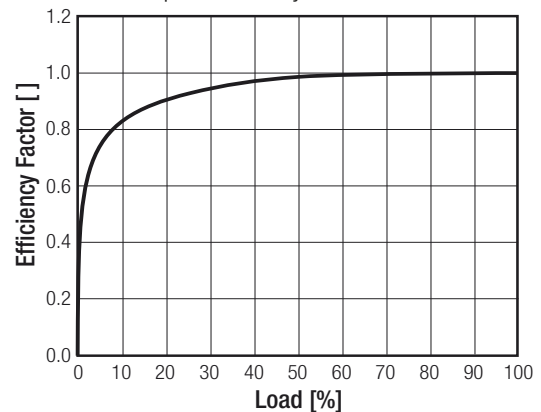

## Calculation Example:

choose your model:

### REM3-1212D

- Efficiency from Table1 (= 87.5% @ max Load / nom Vin)
- Loading conditions in application (e.g. 50%)
- use Eff factor from Graph1 (= 0.98 @50%)

Calculation:


Vin = 12V  
Iout = 50%  
Eff<sub>100%</sub> = 87.5%  
Eff<sub>factor50%</sub> = 0.98  
R<sub>th</sub> = 18°C/W  
T<sub>CASEmax</sub> = 105°C

$$Eff_{50\%} = Eff_{100\%} * Eff_{factor50\%} = 87.5 * 0.98 = \underline{85.75\%}$$

$$P_{DIS50\%} = P_{in50\%} - P_{out50\%} = \frac{P_{out100\%} * 0.5}{Eff_{50\%}} - (P_{out100\%} * 0.5) = 1.75 - 1.5 = \underline{0.25W}$$

$$T_{OVER} = R_{th} * P_{DIS50\%} = 18 * 0.25 = \underline{4.5°C}$$

$$T_{AMBmax} = T_{CASEmax} - T_{OVER} = 105 - 4.5 = \underline{100.5°C}$$

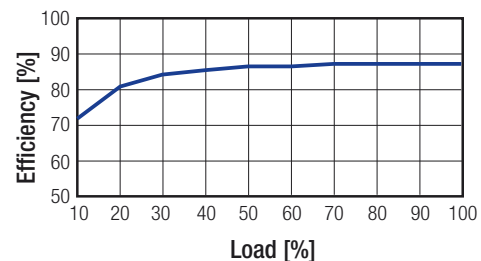

**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

REGULATIONS			
Parameter	Condition	Type	Value
Output Accuracy			$\pm 1\%$
Line Regulation	low line to high line	Single Dual	$\pm 0.2\%$ $\pm 0.5\%$
Load Regulation	no load to full load	Single Dual	$\pm 0.2\%$ $\pm 1\%$
Cross Regulation	asymmetrical load 25% / Full Load	only Dual Output	$\pm 5\%$
Transient Response	25% load step change		250 $\mu\text{s}$

PROTECTIONS			
Parameter	Condition	Type	Value
Short Circuit Protection (SCP)			continuous, auto-recovery
Over Load Protection (OLP)	% of lout rated		Hiccup mode, 150% typ.
Output Over Voltage Protection (OVP)		3.3Vout	3.7VDC min. / 5VDC max.
		5Vout	5.6VDC min. / 7VDC max.
		Single 12Vout	13.5VDC min. / 16VDC max.
		15Vout	18.3VDC min. / 22VDC max.
Dual	24Vout	29.1VDC min. / 34.5VDC max.	
	5Vout	5.6VDC min. / 7VDC max.	
	Dual 12Vout	13.5VDC min. / 18.2VDC max.	
15Vout	17VDC min. / 22VDC max.		
Isolation Voltage	I/P to O/P working voltage		5kVAC / 1 minute 250VAC / continuous
Means of Protection			2MOPP
Leakage Current	240VAC, 60Hz		2 $\mu\text{A}$
Medical Device Classification			Type CF applied device (design to meet)
Internal Clearance	I/P to O/P		8mm
		Creepage	8mm
External Clearance and Creepage	I/P to O/P	Single	>19.72mm
		Dual	>14.64mm
Isolation Capacitance			12pF typ. / 17pF max.
Insulation Grade			Reinforced Insulation

**Notes:**

Note5: This Power module is not internally fused. A input line fuse must be always used.

Recommended Fuse:

2:1 Input Voltage	Fuse (slow blow)
5V	T1.25A
12V	T0.63A
24V	T0.315A
48V	T0.315A

4:1 Input Voltage	Fuse (slow blow)
24V	T0.63A
48V	T0.315A

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Humidity		5% to 95% RH
Temperature Coefficient		$\pm 0.02\%$ / $^\circ\text{C}$
Thermal Impedance	natural convection (20LFM)	18 $^\circ\text{C}$ / W
max. Case Temperature Range		-40 $^\circ\text{C}$ to +105 $^\circ\text{C}$
max. Ambient Temperature Range		see calculation example
MTBF (+25 $^\circ\text{C}$ )	according to MIL-HDBK-217F, full load	6444 x 10 <sup>3</sup> hours

**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Report / File Number	Standard
CB Medical Safety	E314885-A6 1409015	IEC-60601-1 Medical Report + ISO14971 Risk Assessment
ANSI/AAMI	E314885-A6	ES60601-1
CAN/CSA Medical	E314885-A6	C22.2 No. 60601-1:08
Certificate Type (Others)	Conditions	Standard / Criterion
EMI Standard <sup>(7)</sup>	Conducted	CISPR 11, EN55011, Class A, B
	Radiated	CISPR 11, EN55011, Class A, B
	Conducted and Radiated	FCC18
ESD	Air $\pm 8\text{kV}$ ; Contact $\pm 6\text{kV}$	EN61000-4-2, Criteria A
Radiated Immunity	10V/m	EN61000-4-3, Criteria A
Fast Transient <sup>(6)</sup>	$\pm 2\text{kV}$	EN61000-4-4, Criteria A
Surge <sup>(6)</sup>	$\pm 2\text{kV}$	EN61000-4-5, Criteria A
Conducted Immunity	20Vr.m.s	EN61000-4-6, Criteria A
Power Frequency Magnetic Field	10A/m	EN61000-4-8, Criteria A
Thermal Shock		MIL-STD-810F
Vibration		MIL-STD-810F

**Notes:**


Note6: An external input filter capacitor is required if the model has to meet EN61000-4-4 or/and EN61000-4-5.

Recommended components:

5Vin	aluminium capacitor (Nippon Chemi-con KY series, 1000 $\mu\text{F}/25\text{V}$ ) and a reverse diode (Vishay V10P45) to connect in parallel
12Vin, 24Vin	aluminium capacitor (Nippon Chemi-con KY series, 470 $\mu\text{F}/50\text{V}$ )
48Vin	aluminium capacitor (Nippon Chemi-con KY series, 330 $\mu\text{F}/100\text{V}$ )

Note7: The whole REM3 series can meet EMI Class A with no external filter. And Class B only with external components.

**EMC Filter Suggestion for Class B**

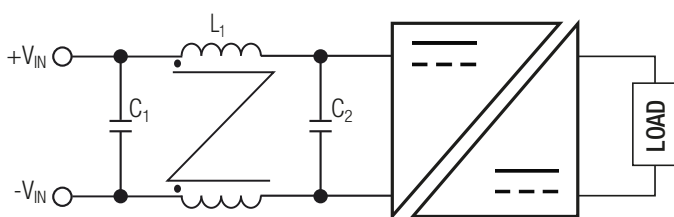

MODEL	C1 <sup>(8)</sup>	C2 <sup>(8)</sup>	L1 <sup>(8)</sup>
REM3-05xxS_D	22 $\mu\text{F}/16\text{V}$ MLCC	22 $\mu\text{F}/16\text{V}$ MLCC	137 $\mu\text{H}$ CMC
REM3-12xxS_D REM3-24xxS_D REM3-24xxS_D/W	4.7 $\mu\text{F}/50\text{V}$ MLCC	4.7 $\mu\text{F}/50\text{V}$ MLCC	277 $\mu\text{H}$ CMC
REM3-48xxS_D REM3-48xxS_D/W	2.2 $\mu\text{F}/100\text{V}$ MLCC	1 $\mu\text{F}/100\text{V}$ MLCC	175 $\mu\text{H}$ CMC

**Notes:**


Note8: The component values can be adapted according to customers' application.

DIMENSION and PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	Case Potting	non-conductive black plastic silicone (UL94-V0)
Package Dimension (LxWxH)		31.80 x 20.30 x 10.40mm
Package Weight		14g


continued on next page

Specifications (measured @ ta= 25°C, nominal input voltage, full load and after warm-up)






Dimension Drawing (mm)



“C” Pinning




“A” Pinning (Standard)




Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
11	No Pin	Com
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin



Pin Connections

Pin #	Single	Dual
1	CTRL*	CTRL*
2	-Vin	-Vin
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22	+Vin	+Vin
23	+Vin	+Vin



Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm


\* If don't choose CTRL option, there is no pin on the corresponding pin number

NC= not connected  
Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	Tube	255 x 21.8 x 16.5mm
Packaging Quantity		7pcs
Storage Temperature Range		-55°C to +125°C

Tube Dimension Drawing (mm)

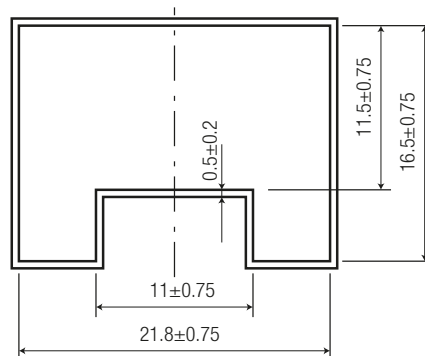

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.