



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Portable Refractometers

Measure the concentration of Sugar, Salt, Lubricants, Antifreeze, Cutting Fluids & more
Available with or without Automatic Temperature Compensation

Features:

- Easy to operate refractometers provide accurate and repeatable measurements on easy to read scales
- Automatic temperature compensation models available for sugar, salt, lubricants, cutting fluids, and antifreeze
- Requires only 2 or 3 drops of solution
- The prism and lens with a simple focus adjustment provides repeatable results
- Complete with case, calibration screwdriver, and calibration solution

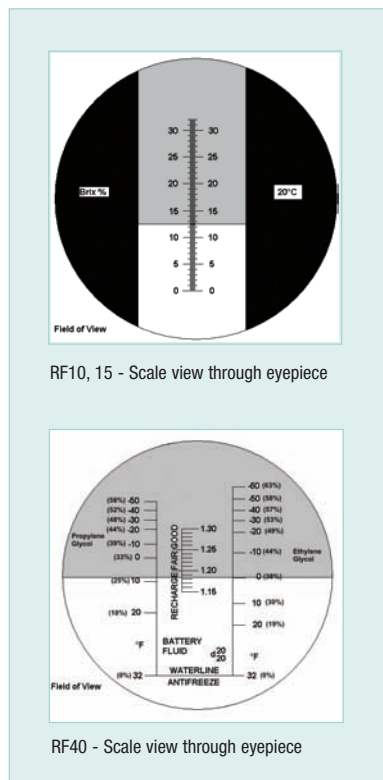

RF10, 15 - Scale view through eyepiece

RF40 - Scale view through eyepiece

Ordering Information:

- RF16**0 to 10% Brix Refractometer
- RF11**0 to 10% Brix Refractometer with ATC
- RF18**0 to 18% Brix Refractometer
- RF12**0 to 18% Brix Refractometer with ATC
- RF10**0 to 32% Brix Refractometer
- RF15**0 to 32% Brix Refractometer with ATC
- RF20**Salinity Refractometer with ATC
- RF40**Battery Coolant/Glycol Refractometer with ATC (°F)
- RF41**Battery Coolant/Glycol Refractometer with ATC (°C)
- RF30**Triple Range General Service Brix Refractometer

Specifications				
Model	Type	Ranges	Resolution	Accuracy
RF16	Sucrose	0 to 10% Brix	0.1	±0.1%
RF11	Sucrose (ATC)	0 to 10% (10 to 30°C)	0.1	±0.1%
RF18	Lubricants/Cutting fluids	0 to 18% Brix	0.2	±0.2%
RF12	Lubricants/Cutting fluids (ATC)	0 to 18% Brix (10 to 30°C)	0.2	±0.2%
RF10	Sucrose	0 to 32% Brix	0.2	±0.2%
RF15	Sucrose (ATC)	0 to 32% Brix (10 to 30°C)	0.2	±0.2%
RF20	Salt (ATC)	0 to 100ppt (10 to 30°C)	0.001	±0.1%
1.000 to 1.070 Refractive Index				
RF40	Coolant (ATC)	-60 to 32°F Propylene Glycol freeze point	2°F	±2%
		-60 to 25°F Ethylene Glycol freeze point	2°F	±2%
		1.15 to 1.30 Specific Gravity of Battery Acid	0.01	
RF41	Coolant (ATC)	-50 to 0°C Propylene Glycol freeze point	1°C	±2%
		-50 to 0°C Ethylene Glycol freeze point	1°C	±2%
		1.15 to 1.30 Specific Gravity of Battery Acid	0.01	
RF30	Triple Range General Service	0 to 41% Brix	0.2	±0.2%
		42 to 71% Brix	0.2	±0.2%
		72 to 90% Brix	0.2	±0.2%
Dimensions/Wt		RF10/RF15: 6.6 x 1.6 x 1.2" (170 x 40 x 30mm)/ 7oz (200g); RF11/RF16: 7.5 x 1.6 x 1.2" (190 x 40 x 30mm)/ 6.5oz (185g); RF12/RF18: 6.7 x 1.6 x 1.2" (170 x 40 x 30mm)/ 6.5oz (185g); RF20: 7.6 x 1.5 x 1.5" (194 x 38 x 38mm)/ 8oz (227g); RF40/RF41: 6.2 x 1.6 x 1.2" (160 x 40 x 30mm)/ 6.3oz (180g) RF30: 7.9 x 1.5 x 1.1" (200 x 38 x 28mm)/ 21.86oz (620g)		