



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



|                      |         |
|----------------------|---------|
| $BV_{CES}$           | 400±30V |
| $I_C$                | 30A     |
| $V_{CE(sat)}$ (Typ.) | 1.6V    |
| $E_{AS}$             | 300mJ   |


### ●Features

- 1) Low Collector - Emitter Saturation Voltage
- 2) High Self-Clamped Inductive Switching Energy
- 3) Built in Gate-Emitter Protection Diode
- 4) Built in Gate-Emitter Resistance
- 5) Qualified to AEC-Q101
- 6) Pb - free Lead Plating ; RoHS Compliant


### ●Applications

Ignition Coil Driver Circuits  
Solenoid Driver Circuits

### ●Outline

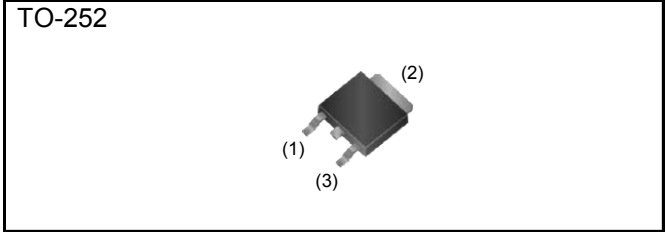

### ●Inner Circuit

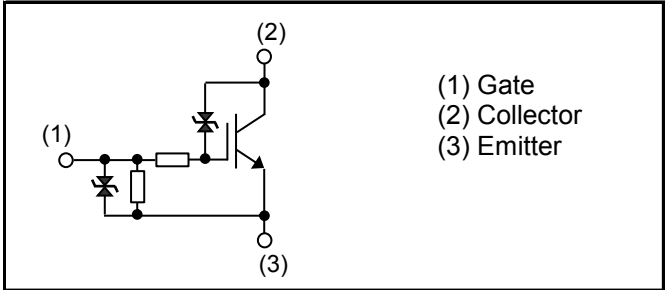

### ●Packaging Specifications

| Type | Packaging                 | Taping     |
|------|---------------------------|------------|
|      | Reel Size (mm)            | 330        |
|      | Tape Width (mm)           | 16         |
|      | Basic Ordering Unit (pcs) | 2,500      |
|      | Packing Code              | TL         |
|      | Marking                   | RGPR30BM40 |

### ●Absolute Maximum Ratings (at $T_C = 25^\circ\text{C}$ unless otherwise specified)

| Parameter                                   | Symbol                    | Value         | Unit             |    |
|---|---------------------------|---------------|------------------|----|
| Collector - Emitter Voltage                 | $V_{CES}$                 | 430           | V                |    |
| Emitter-Collector Voltage ( $V_{GE} = 0V$ ) | $V_{EC}$                  | 25            | V                |    |
| Gate - Emitter Voltage                      | $V_{GES}$                 | ±10           | V                |    |
| Collector Current                           | $I_C$                     | 30            | A                |    |
| Avalanche Energy (Single Pulse)             | $T_j = 25^\circ\text{C}$  | $E_{AS}$      | 300              | mJ |
|   | $T_j = 150^\circ\text{C}$ | $E_{AS}^{*2}$ | 180              | mJ |
| Power Dissipation                           | $P_D$                     | 125           | W                |    |
| Operating Junction Temperature              | $T_j$                     | -40 to +175   | $^\circ\text{C}$ |    |
| Storage Temperature                         | $T_{stg}$                 | -55 to +175   | $^\circ\text{C}$ |    |

### ●Thermal Resistance

| Parameter                               | Symbol            | Values |      |      | Unit |
|---|-------------------|--------|------|------|------|
|   |                   | Min.   | Typ. | Max. |      |
| Thermal Resistance IGBT Junction - Case | $R_{\theta(j-c)}$ | -      | -    | 1.20 | °C/W |

### ●Electrical Characteristics (at $T_j = 25^\circ\text{C}$ unless otherwise specified)

| Parameter                              | Symbol        | Conditions   | Values    |           |           | Unit          |
|--|---------------|--|-----------|-----------|-----------|---------------|
|  |               |  | Min.      | Typ.      | Max.      |               |
| Collector - Emitter Breakdown Voltage  | $BV_{CES}$    | $I_C = 2\text{mA}, V_{GE} = 0\text{V}$<br>$T_j = 25^\circ\text{C}$     | 370       | 400       | 430       | V             |
|  |               | $T_j = -40 \text{ to } 175^\circ\text{C}^{*2}$                         | 365       | -         | 435       | V             |
| Emitter - Collector Breakdown Voltage  | $BV_{EC}$     | $I_C = -10\text{mA}, V_{GE} = 0\text{V}$                               | 25        | 35        | -         | V             |
| Gate - Emitter Breakdown Voltage       | $BV_{GES}$    | $I_G = \pm 5\text{mA}, V_{CE} = 0\text{V}$                             | $\pm 12$  | -         | $\pm 17$  | V             |
| Collector Cut - off Current            | $I_{CES}$     | $V_{CE} = 250\text{V}, V_{GE} = 0\text{V}$<br>$T_j = 25^\circ\text{C}$ | -         | -         | 7         | $\mu\text{A}$ |
|  |               | $T_j = 150^\circ\text{C}^{*2}$   | -         | -         | 100       | $\mu\text{A}$ |
| Gate - Emitter Leakage Current         | $I_{GES}$     | $V_{GE} = \pm 10\text{V}, V_{CE} = 0\text{V}$                          | $\pm 0.4$ | $\pm 0.6$ | $\pm 1.2$ | mA            |
| Gate - Emitter Threshold Voltage       | $V_{GE(th)}$  | $V_{CE} = 5\text{V}, I_C = 12\text{mA}$<br>$T_j = 25^\circ\text{C}$    | 1.3       | 1.7       | 2.1       | V             |
|  |               | $T_j = 150^\circ\text{C}^{*2}$   | -         | 1.3       | -         | V             |
| Collector - Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 12\text{A}, V_{GE} = 5\text{V}$<br>$T_j = 25^\circ\text{C}$     | -         | 1.60      | 2.00      | V             |
|  |               | $T_j = 150^\circ\text{C}$  | -         | 1.80      | -         | V             |
| Collector - Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 5\text{A}, V_{GE} = 4.5\text{V}$<br>$T_j = 25^\circ\text{C}$    | -         | 1.17      | 1.50      | V             |
|  |               | $T_j = 150^\circ\text{C}$  | -         | 1.19      | -         | V             |

**●Electrical Characteristics** (at  $T_j = 25^\circ\text{C}$  unless otherwise specified)

| Parameter                              | Symbol        | Conditions  | Values |      |      | Unit          |
|--|---------------|---|--------|------|------|---------------|
|  |               |   | Min.   | Typ. | Max. |               |
| Collector - Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 12\text{A}, V_{GE} = 4\text{V}$<br>$T_j = 25^\circ\text{C}$  | -      | 1.70 | 2.10 | V             |
|  |               | $T_j = 150^\circ\text{C}$   | -      | 1.90 | -    | V             |
| Input Capacitance                      | $C_{ies}$     | $V_{CE} = 10\text{V}$   | -      | 1330 | -    | pF            |
| Output Capacitance                     | $C_{oes}$     | $V_{GE} = 0\text{V}$  | -      | 220  | -    |               |
| Reverse Transfer Capacitance           | $C_{res}$     | $f = 1\text{MHz}$   | -      | 71   | -    |               |
| Total Gate Charge                      | $Q_g$         | $V_{CE} = 12\text{V}, I_C = 10\text{A},$<br>$V_{GE} = 5\text{V}$  | -      | 22   | -    | nC            |
| Turn - on Delay Time <sup>*1,*2</sup>  | $t_{d(on)}$   | $I_C = 8\text{A}, V_{CC} = 300\text{V},$<br>$V_{GE} = 5\text{V}, R_G = 100\Omega,$<br>$L = 5\text{mH}, T_j = 25^\circ\text{C}$  | 0.11   | 0.19 | 0.50 | $\mu\text{s}$ |
| Rise Time <sup>*1,*2</sup>             | $t_r$         |   | 0.10   | 0.18 | 0.50 |               |
| Turn - off Delay Time <sup>*1,*2</sup> | $t_{d(off)}$  |   | 0.9    | 1.4  | 4.0  |               |
| Fall Time <sup>*1,*2</sup>             | $t_f$         |   | 0.8    | 1.8  | 5.5  |               |
| Turn - on Delay Time <sup>*1</sup>     | $t_{d(on)}$   | $I_C = 8\text{A}, V_{CC} = 300\text{V},$<br>$V_{GE} = 5\text{V}, R_G = 100\Omega,$<br>$L = 5\text{mH}, T_j = 150^\circ\text{C}$ | -      | 0.18 | -    | $\mu\text{s}$ |
| Rise Time <sup>*1</sup>                | $t_r$         |   | -      | 0.21 | -    |               |
| Turn - off Delay Time <sup>*1</sup>    | $t_{d(off)}$  |   | -      | 1.7  | -    |               |
| Fall Time <sup>*1</sup>                | $t_f$         |   | -      | 3.0  | -    |               |
| Avalanche Energy (Single Pulse)        | $E_{AS}$      | $L = 5\text{mH}, V_{GE} = 5\text{V},$<br>$V_{CC} = 30\text{V}, R_G = 1\text{k}\Omega,$<br>$T_j = 25^\circ\text{C}$              | 300    | -    | -    | mJ            |
|  |               | $T_j = 150^\circ\text{C}^{*2}$  | 180    | -    | -    | mJ            |
| Gate Series Resistance                 | $R_G$         |   | 70     | 100  | 130  | $\Omega$      |
| Gate - Emitter Resistance              | $R_{GE}$      |   | 8      | 16   | 24   | k $\Omega$    |

\*1) Assurance items according to our measurement definition (Fig.18)

\*2) Design assurance items



●Electrical Characteristic Curves

Fig.1 Typical Output Characteristics

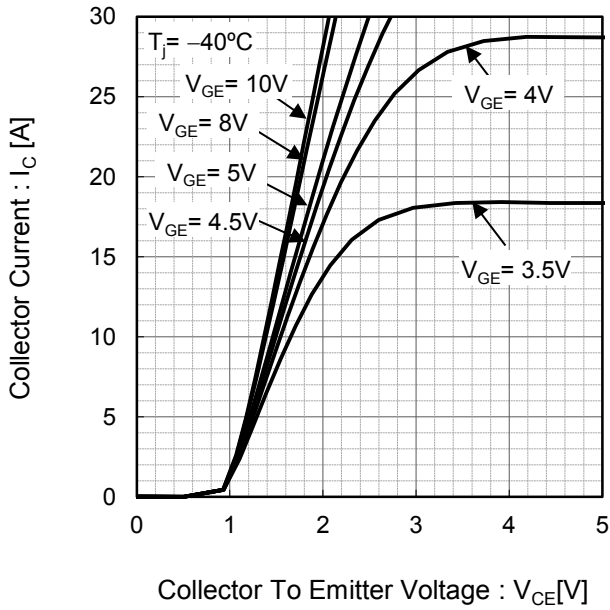


Fig.2 Typical Output Characteristics

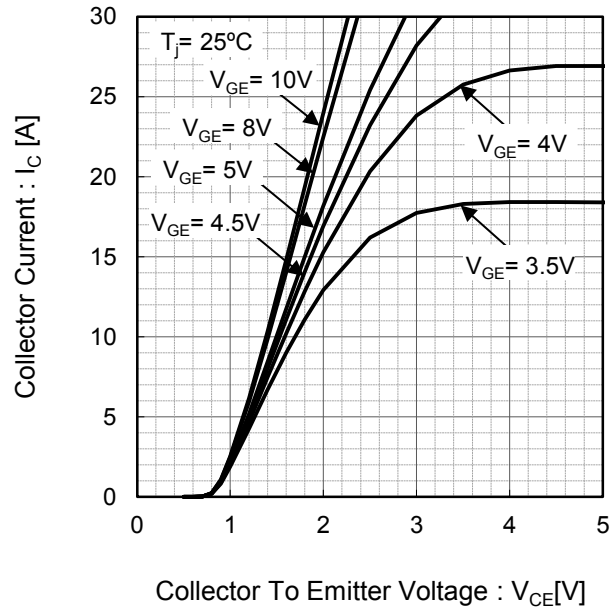


Fig.3 Typical Output Characteristics


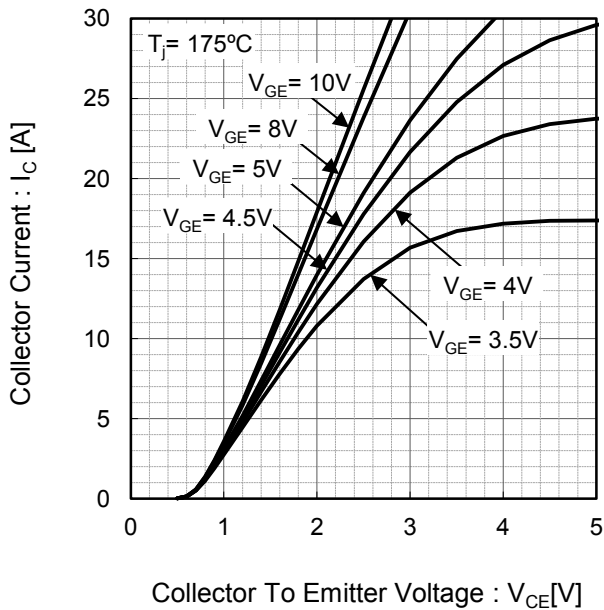


Fig.4 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

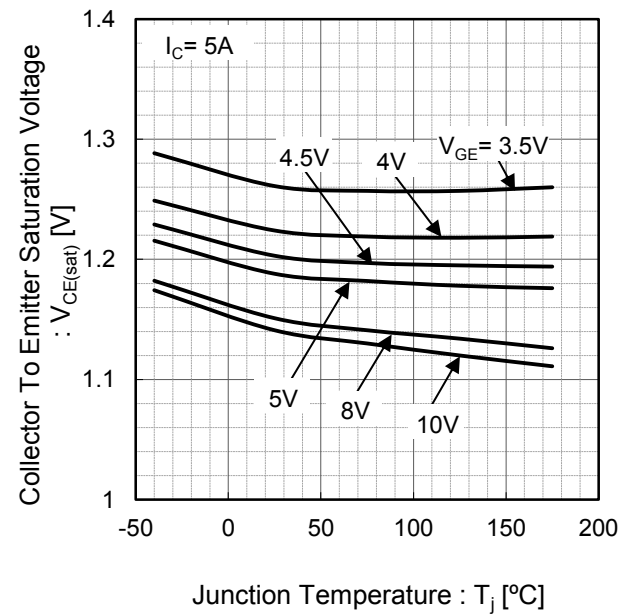

●Electrical Characteristic Curves

Fig.5 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

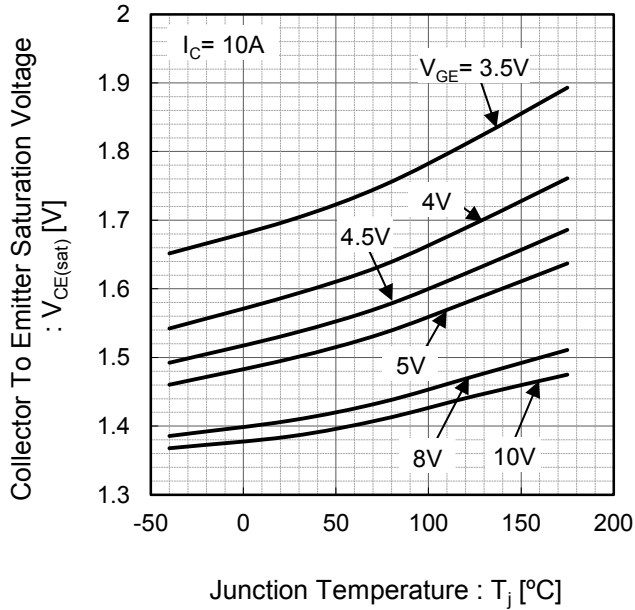


Fig.6 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

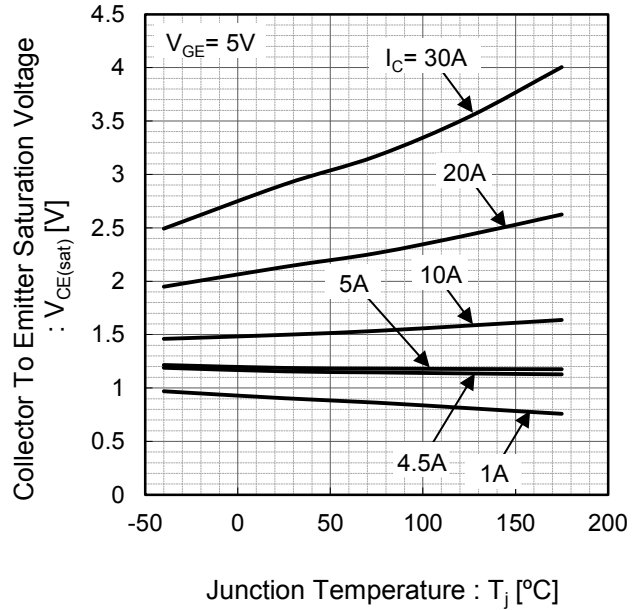


Fig.7 Typical Transfer Characteristics


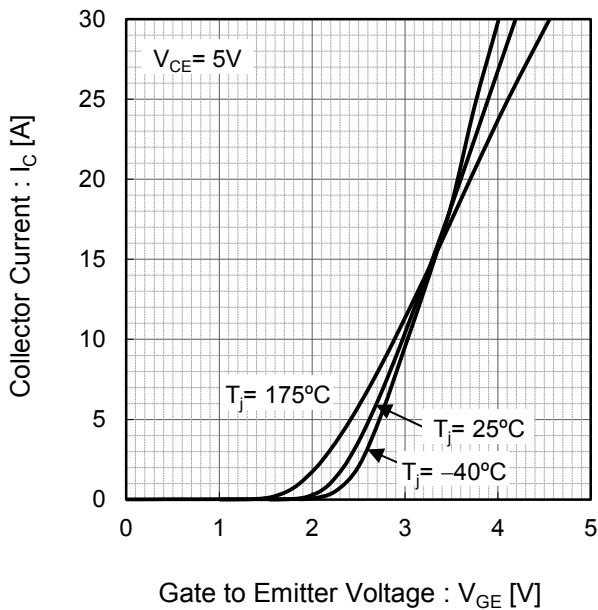


Fig.8 Typical Gate To Emitter Threshold Voltage vs. Junction Temperature

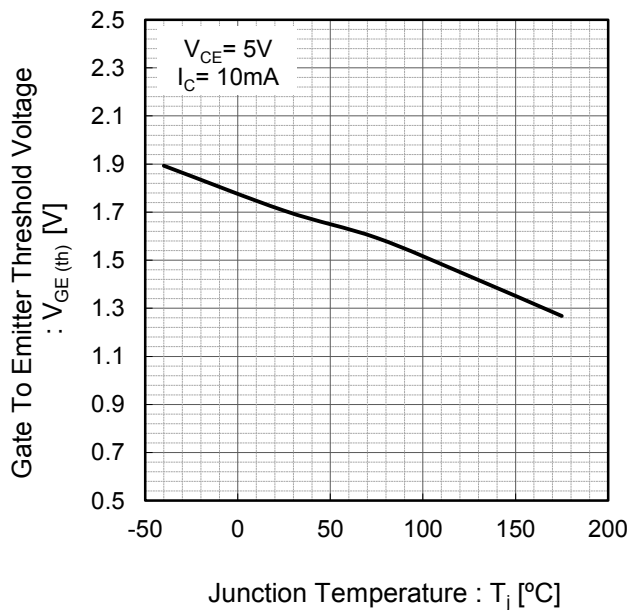

●Electrical Characteristic Curves

Fig.9 Typical Leakage Current vs. Junction Temperature

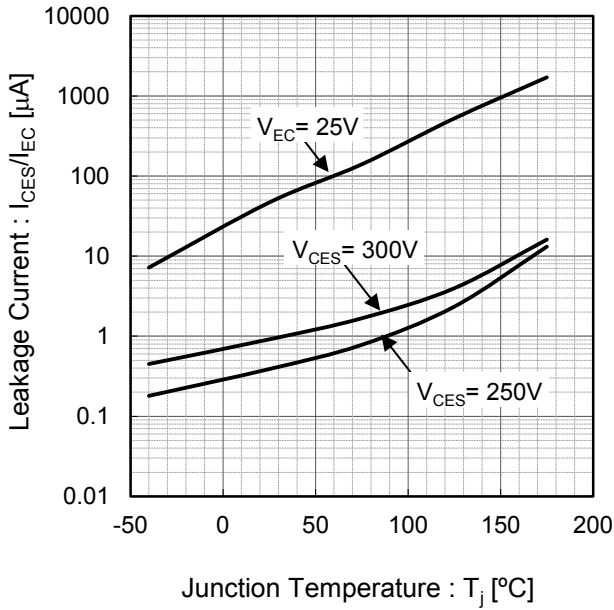


Fig.10 Typical Collector To Emitter Breakdown Voltage vs. Junction Temperature

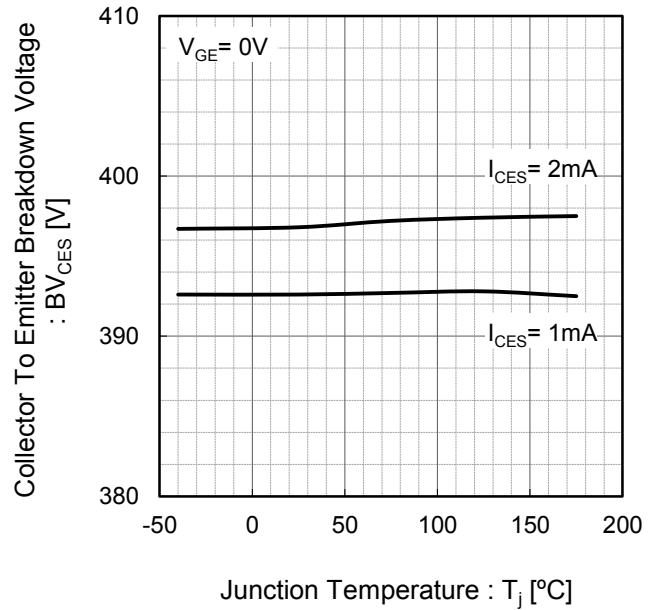


Fig.11 Typical Self Clamped Inductive Switching Current vs. Inductance


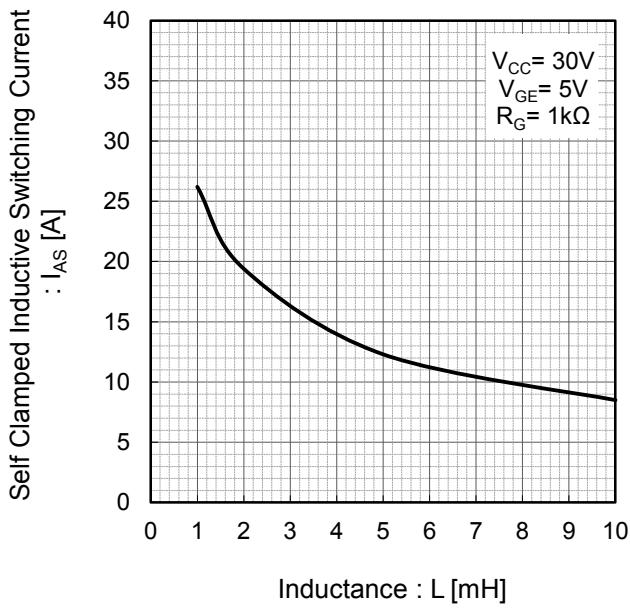


Fig.12 Typical Gate Charge

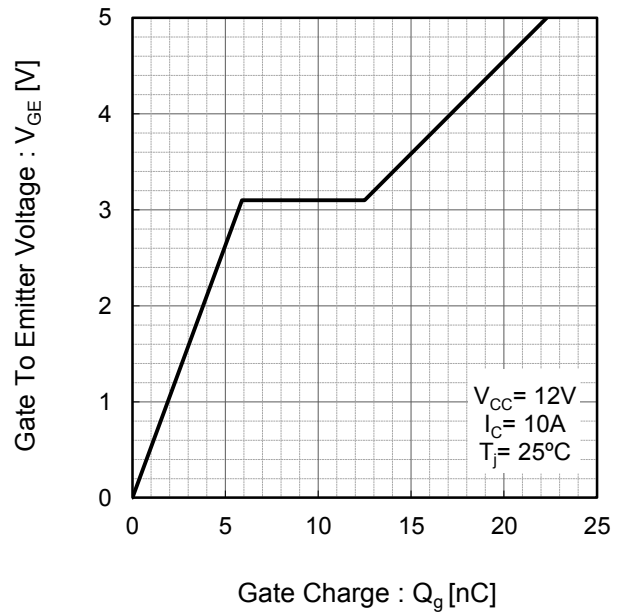

●Electrical Characteristic Curves

Fig.13 Typical Capacitance vs. Collector To Emitter Voltage

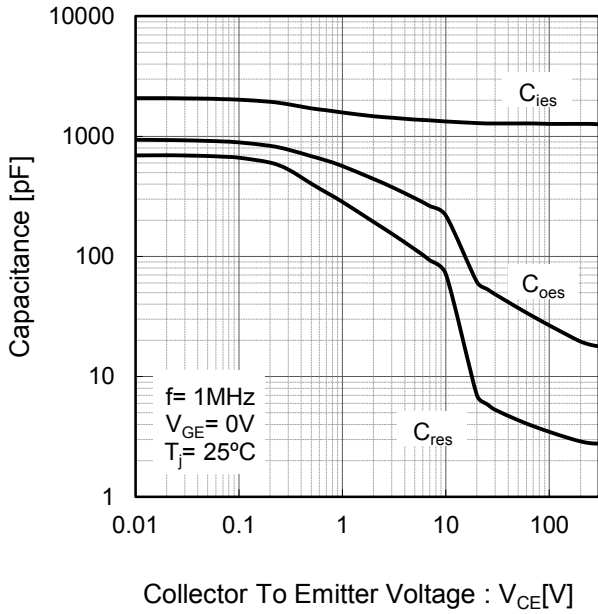


Fig.14 Typical Switching Time vs. Junction Temperature


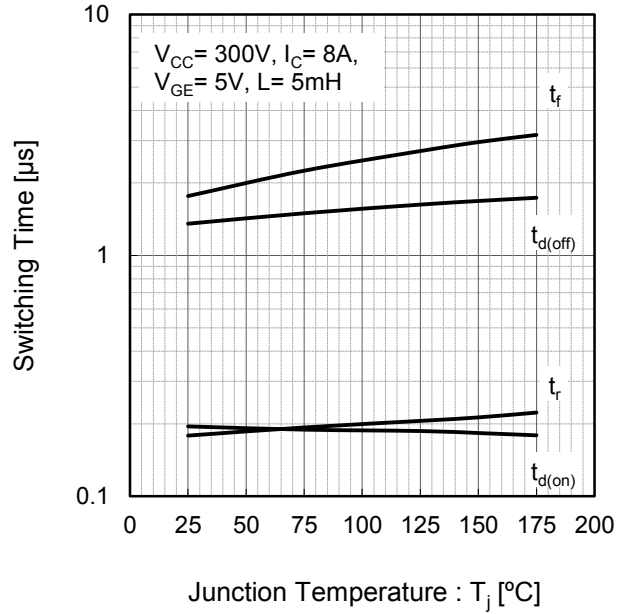



Fig.15 Forward Bias Safe Operating Area



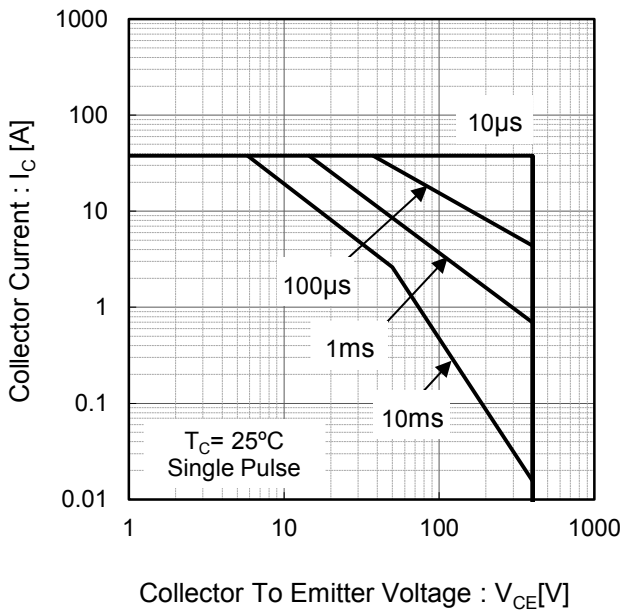

●Electrical Characteristic Curves

Fig.16 Transient Thermal Impedance

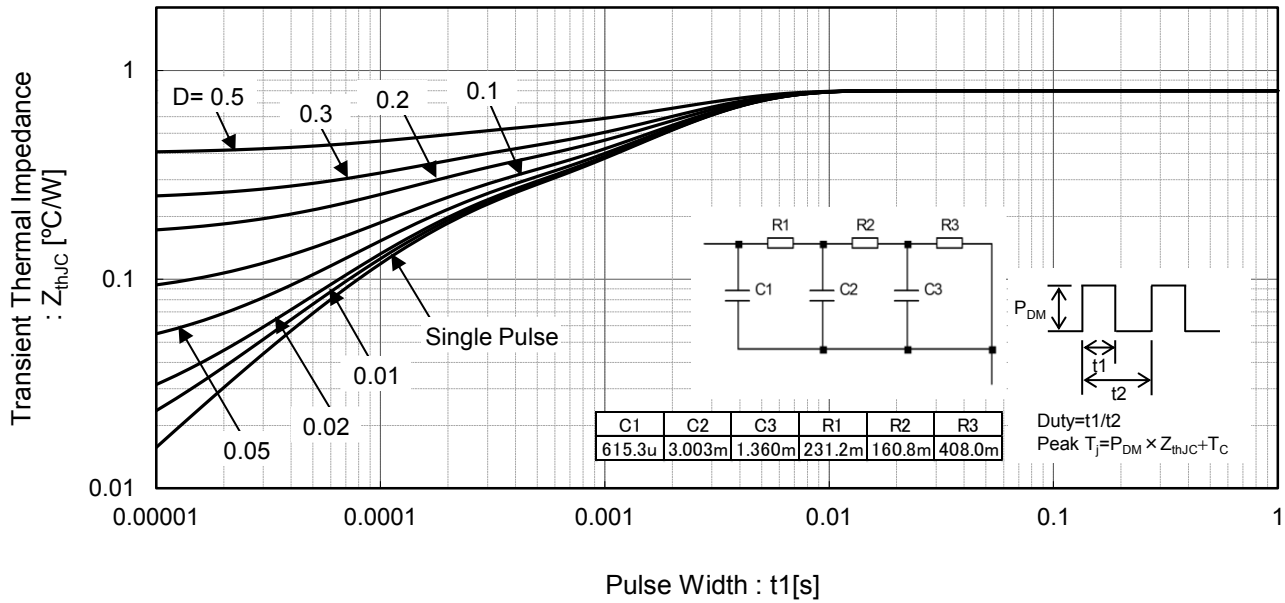

●Inductive Load Switching Circuit and Waveform

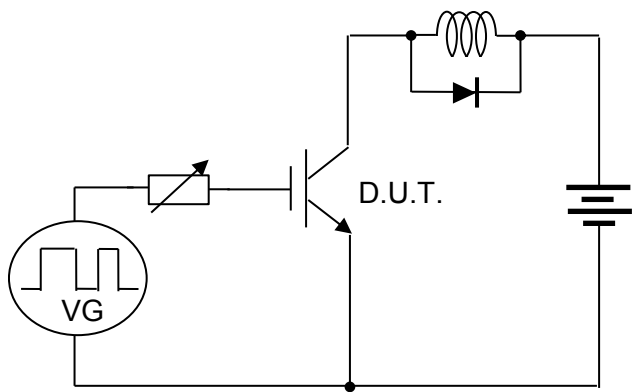


Fig.17 Inductive Load Switching Circuit

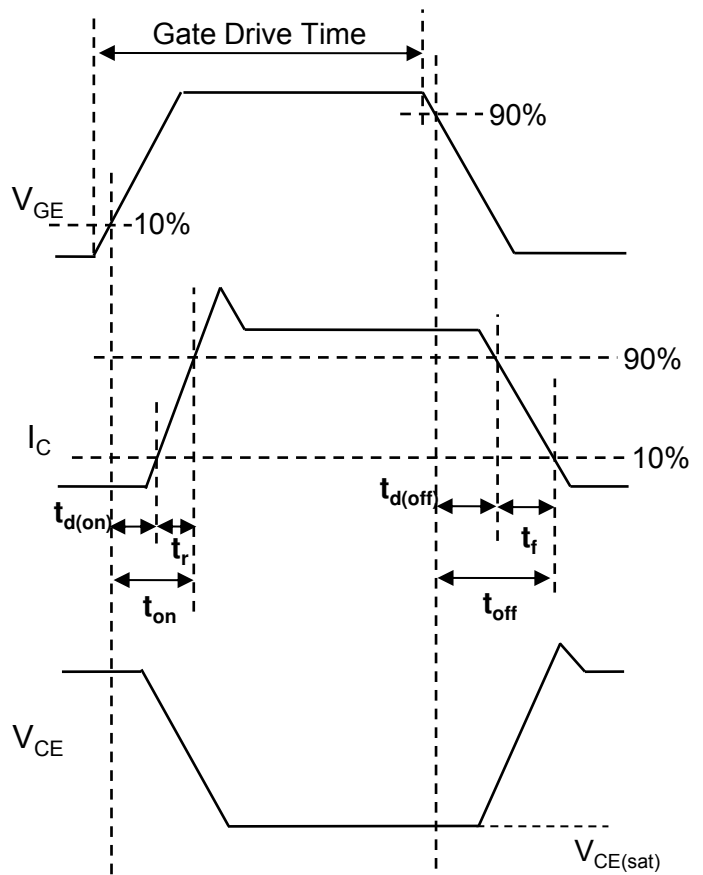


Fig.18 Inductive Load Switching Waveform

●Self Clamped Inductive Switching Circuit and Waveform

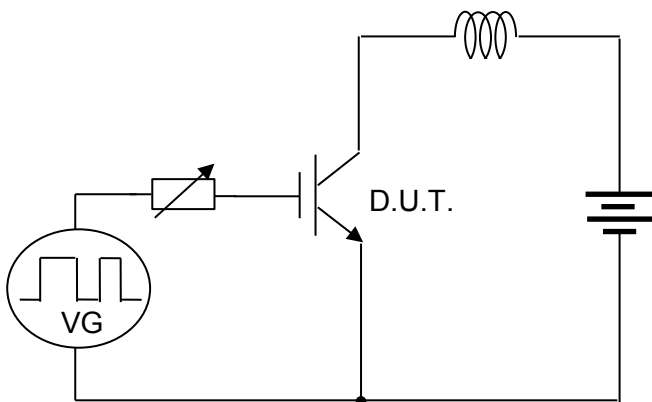


Fig.19 Self Clamped Inductive Switching Circuit

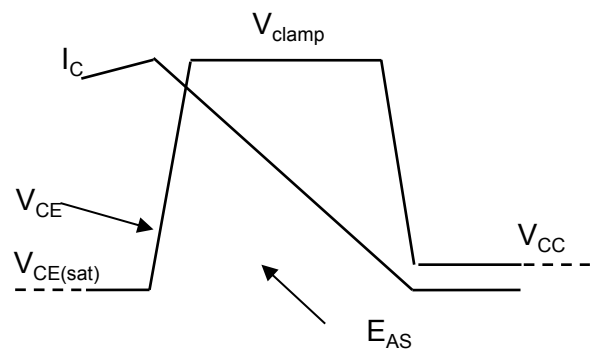


Fig.20 Self Clamped Inductive Switching Waveform

## Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.  
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>



RGPR30BM40HR - Web Page

|                             |              |
|-----------------------------|--------------|
| Part Number                 | RGPR30BM40HR |
| Package                     | TO-252       |
| Unit Quantity               | 2500         |
| Minimum Package Quantity    | 2500         |
| Packing Type                | Taping       |
| Constitution Materials List | inquiry      |
| RoHS                        | Yes          |