

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Tyco/Electronics

Raychem Circuit Protection

308 Constitution Drive Menlo Park, CA 94025-1164

800-227-4856 FAX 800-227-4866

PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: RHE750

DOCUMENT: SCD 24261

PCN: 446913 REV LETTER: F

REV DATE: OCTOBER 8, 2001

PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 16V MAX Current: 100A MAX


INSULATING MATERIAL:

Cured, Flame Retarded Epoxy Polymer

LEAD MATERIAL:

20 AWG Tin/Lead Plated Copper

PART MARKING:



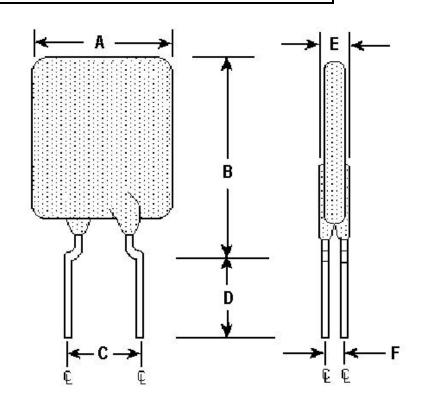


TABLE I. DIMENSIONS:

	Α		В		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:		14.0		23.5	4.3	5.8	7.6			3.0	1.2
in*:		(0.55)	-	(0.93)	(0.17)	(0.23)	(0.30)	-	-	(0.12)	(0.05)

^{*}Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

IHOLD		CL	IRRENT	RATIN	IGS		TIME TO	RESISTANCE		TRIPPED-STATE
							TRIP			POWER
										DISSIPATION
AMPS	AMPS		AMPS		AMPS		SECONDS AT	OHMS		WATTS AT
25°C	AT 0°C		AT 25°C		AT 60°C		25°C, 37.5A	AT 25°C		25°C
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MAX	MIN	MAX	TYP
7.5			7.5	13.1			7.0	0.0094	0.022	4.5

Recognitions: UL, TUV, CSA recognized.

Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.