



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# Thermal Transfer Labels

Panduit is a global leader in reliable and innovative solutions for identification and safety. Products are engineered for a wide variety of industries and applications – including electrical, electronics, industrial, and network. Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.

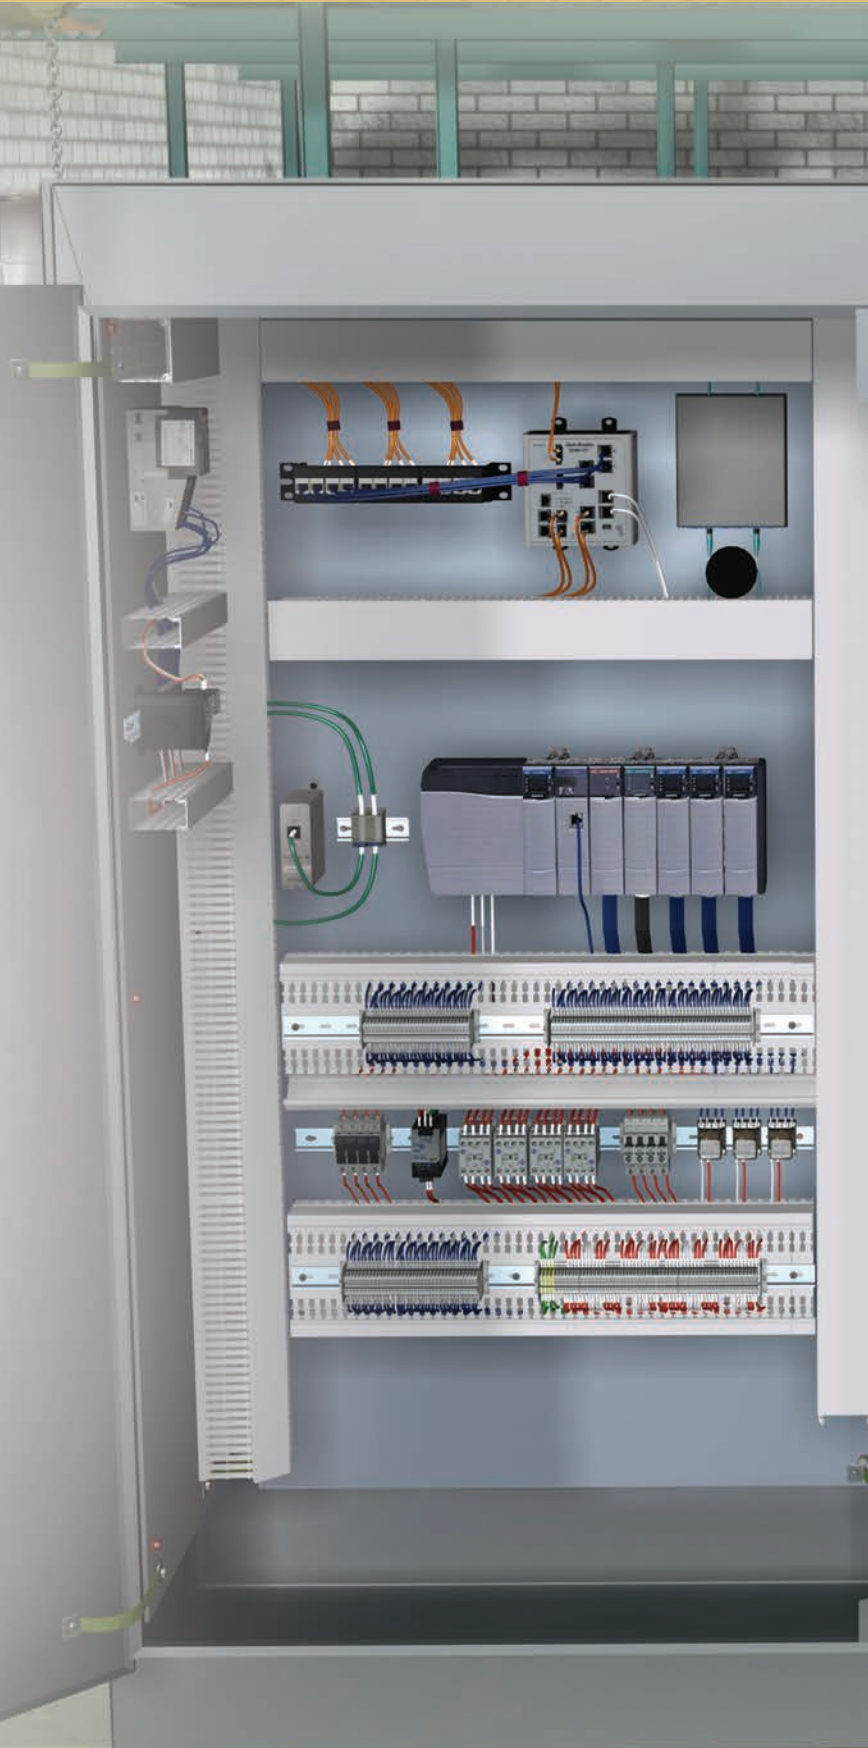



## Cable/Wire Labels

Turn-Tell® Labels . . . . .	4
Self-Laminating Labels . . . . .	5 – 7
LabelCore™ Fiber Optic Cable Identification System . . . . .	7 – 8
Flag Labels . . . . .	8
Non-Laminated Vinyl Cloth Labels . . . . .	9
Non-Laminated Nylon Cloth Labels . . . . .	10

## Marker Plates

High-Temperature Flame-Retardant Marker Plates . . . . .	11
Halogen-Free Flame-Retardant Marker Plates . . . . .	11
Standard Marker Plates . . . . .	12

## Heat Shrink Labels

Military Grade – Single-Sided Labels . . . . .	13
Military Grade – Two-Sided Labels . . . . .	14
Halogen-Free – Two-Sided Labels . . . . .	15
Fluid-Resistant – Two-Sided Labels . . . . .	16

## Component Labels/Continuous Tapes

Raised Panel Labels . . . . .	17 – 20
Polyester Component Labels . . . . .	21
Super-Tack Polyester Component Labels . . . . .	22
Tedlar® Component Labels . . . . .	23
Tamper-Evident Polyester Component Labels . . . . .	23
Non-Adhesive Polyester Component Labels . . . . .	24
Vinyl Cloth Component Labels . . . . .	24
Polyimide Component Labels . . . . .	25
Paper Component Labels . . . . .	26
Continuous Tapes . . . . .	26 – 28

## Safety and Solar Labels

Super-Tack Polyester Arc Flash Labels . . . . .	29
Raised Panel Arc Flash Labels . . . . .	29
Super-Tack Arc Flash Continuous Tapes . . . . .	30
Super-Tack Polyester Facility Identification Labels . . . . .	30
Polyester Photoluminescent Tapes . . . . .	31
Raised Panel Solar Labels . . . . .	31
Over-Laminate Labels . . . . .	32
Super-Tack Polyester Solar Labels . . . . .	32
Reflective Continuous Tapes for Solar Applications . . . . .	32

## Software/Printers/Accessories

Software . . . . .	33
TDP43ME Printers, Accessories and Ribbons . . . . .	34
TDP43HE & TDP46HE Printers, Accessories & Ribbons . . . . .	35

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

## Turn-Tell® Labels

**PATENTED**

- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics

- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
R050X075V1T	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000
R050X125V1T				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG		
R050X150V1T				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG		
R100X075V1T	TIA Blue TIA Green TIA Gray TIA Red TIA Yellow White TIA Blue TIA Green TIA Gray TIA Red TIA Yellow	1.00	25.4	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500
R100X125V1T				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG		
R100X150V1T				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/		
R100X150V2T														
R100X150V3T														
R100X150V4T														
R100X150V7T														
R100X150V8T														
R100X225V1T				2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG		
R100X225V2T														
R100X225V3T														
R100X225V4T														
R100X225V7T														
R100X225V8T														
R100X400V1T				4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG		
R150X150V1T				White	1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6		
R200X150V1T														
R200X225V1T	2.00	50.8	2.25		57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG	4	
R200X400V1T			4.00		101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG	2	

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Vinyl Self-Laminating Labels

- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling
- Use thermal transfer hybrid ribbon
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
S050X075VA1Y	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000
S050X075VATY*														2500
S050X125VA1Y				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0			Cat. 3 UTP/ 12 - 10 AWG
S050X125VATY*														
S050X150VA1Y		1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG				
S050X150VATY*														
S050X250VATY*		2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1		6 – 2 AWG			
S075X075VATY*		0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0		0.16	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	5
S075X100VATY*														
S075X125VATY*														
S075X150VATY*	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG					
S100X075VA1Y	TIA Blue TIA Brown TIA Green TIA Gray TIA Orange TIA Purple	1.00	25.4	0.75	19.1	0.25	6.4	0.08	0.50	2.0	4.0	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500
S100X075VATY*														5000
S100X125VA1Y				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0			Cat. 3 UTP/ 12 - 10 AWG
S100X125VATY*														
S100X150VA1Y		1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG				
S100X150VATY											2500			
S100X150VBTY		1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1		4	5000		
S100X150VCTY														
S100X150VDTY														
S100X150VETY														
S100X150VFTY														
S100X150VGTY														

Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Vinyl Self-Laminating Labels (continued)

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.									
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm												
S100X150VHTY*	TIA Red	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	5000									
S100X150VITY*	TIA Yellow																						
S100X150V0TY*	Black																						
S100X150V9TY*	Gold																						
S100X225VA1Y	White			2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG											
S100X225VATY*	White																						
S100X225VBTY*	TIA Blue																						
S100X225VCTY*	TIA Brown																						
S100X225VDTY*	TIA Green																						
S100X225VET Y*	TIA Gray																						
S100X225VFTY*	TIA Orange																						
S100X225VGT Y*	TIA Purple																						
S100X225VHTY*	TIA Red																						
S100X225VITY*	TIA Yellow																						
S100X225V0TY*	Black																						
S100X225V9TY*	Gold																						
S100X250VA1Y	White	2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 - 2 AWG	1500												
S100X250VATY*											5000												
S100X400VA1Y											4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	1000			
S100X400VATY*																				2500			
S100X650VA1Y											6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 - 250 MCM	250			
S100X650VATY*																				1000			
S150X150VATY*											White	1.50	38.1	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	5000
S150X225VATY*														2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	8 – 4 AWG	
S150X400VATY*														4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.1	2 – 1 AWG	
S200X150VATY*											White	2.00	50.8	1.50	38.1	0.50	21.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2
S200X225VA1Y	2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 - 4 AWG	500													
S200X225VATY*	2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 – 2 AWG	1000													
S200X250VATY*	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	500													
S200X400VA1Y	6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 - 250 MCM	1000													
S200X400VATY*										250													
S200X650VA1Y	250																						
S200X650VATY*	1000																						

Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## PVDF Self-Laminating Labels

- Self-extinguishing material and recommended alternative to Tedlar®
- Sized specifically for wire and cable applications
- Use thermal transfer hybrid ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH149799



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm			
S050X150T1T	White	0.50	12.7	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG	8	5000
S075X125T1T		0.75	19.1	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	5	
S100X075T1T		1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/18 – 14 AWG	4	2500
S100X125T1T				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	12 – 10 AWG		
S100X150T1T				1.50	38.1	0.50	12.7	0.16	4.0	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/ 10 - 6 AWG		
S100X225T1T				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG		
S100X400T1T		2.00	50.8	4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 – 1 AWG	2	2500
S200X400T1T				2	500									

Tedlar® is a registered trademark of E. I. du Pont de Nemours and Company.


Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## LabelCore™ Fiber Optic Cable Identification System



- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot



Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	100
NWSLC-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 1" long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAC (LS8E Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	
NWSLC-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 1" long, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAC (LS8E Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	

Order number of labels required in multiples of Standard Package Quantity.

Contact Technical Support at 866.871.4571.



## LabelCore™ Fiber Optic Cable Identification System (continued)

Part Number	Color	Part Description	Std. Pkg. Qty.
NWSLC2-2Y	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	100
NWSLC2-2Y-AQ	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-3Y	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: S200X150YAJ (Laser/Inkjet) or S200X150VATY (Thermal Transfer Printer).	
NWSLC2-7Y	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, use with labels: S200X225YAJ (Laser/Inkjet) S200X225VATY (Thermal Transfer Printer).	

Order number of labels required in multiples of Standard Package Quantity.

## Flag Labels

- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979;
- cUL recognized C22.2 No. 0.15-01, File # MH14979



Part Number	Width		Height		Print-On Area		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Std. Pkg. Qty. Roll		
	In.	mm	In.	mm	Width	Height	In.	mm	In.	mm				
F100X150AJT	1.00	25.4	1.50	38.1	0.88	22.4	0.75	19.1	0.12	3.1	0.20	5.1	12 – 10 AWG	2500
F100X213AJT			2.13	54.1					0.32	8.1	0.38	9.7	Cat. 5e – Cat. 6	
F100X300AJT			3.00	76.2			2.00	50.8	0.09	2.3	0.28	7.1	8 – 4 AWG	
F100X363AJT			3.63	92.2					0.20	5.1	0.46	11.7	2 – 1 AWG	

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Non-Laminated Vinyl Cloth Labels

- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications
- Works well on Teflon® coated wires\*
- Use thermal transfer hybrid ribbon
- Temperature range: -40° F to 170° F (-40° C to 77° C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



Part Number	Print-On Area Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm			
N025X075CBT	White	0.25	6.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	10000
N025X125CBT				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
N025X150CBT				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
N025X175CBT				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		
N050X075CBT		0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG		10000
N050X100CBT				1.00	25.4	0.16	4.1	0.24	6.1	10 – 8 AWG		
N050X125CBT				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
N050X150CBT				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
N050X175CBT				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		
N100X075CBT		1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	10000
N100X125CBT				1.25	31.8	0.20	4.1	0.32	8.1	10 – 6 AWG		5000
N100X150CBT				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		2500
N100X175CBT				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		2500
N150X075CBT		1.50	38.1	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	1	5000

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.  
 \* Teflon® is a registered trademark of E. I du Pont de Nemours and Company

## Non-Laminated Nylon Cloth Labels

- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking
- Use thermal transfer resin ribbon
- Temperature range: -65°F to 275°F (-54°C to 135°C)



Part Number	Color	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm			
N050X075C1T	White	0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	5	10000
N050X075C2T	Yellow											
N050X125C1T	White			1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
N050X125C2T	Yellow											
N050X150C1T	White			1.50	38.1	0.24	6.1	0.40	10.5	8 – 2 AWG		
N050X150C2T	Yellow											
N100X075C1T	White	1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	5000
N100X075C2T	Yellow											
N100X125C1T	White			1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
N100X125C2T	Yellow											
N100X150C1T	White			1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
N100X150C2T	Yellow											

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## High-Temperature Flame-Retardant Marker Plates

- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A or RHER4BL-A resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



Part Number	Color	Width		Height		Print-On Area Width		Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm		
M200X042FQT	White	2.00	50.8	0.42	10.7	1.22	31.0	500	1
M200X042FQT-B				2000					
M200X080FQT				0.80	20.3			250	
M200X080FQT-B				1000					

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Halogen-Free Flame-Retardant Marker Plates

- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 193°F (-40°C to 90°C)




Part Number	Color	Width		Height		Print-On Area Width		Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm		
M200X042UPT	White	2.00	50.8	0.42	10.7	1.30	33.0	500	1
M200X042UPT-B				2000					
M200X080UPT				0.80	20.3			500	
M200X080UPT-B				2000					

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Standard Marker Plates

- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation. The 0.5" Plenum rated and 0.33" non-Plenum rated Hook & Loop Cable Ties can be used in hanging position

- Meets the outgassing requirements of ASTM E-595 suitable for use in air handling spaces
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbon
- Temperature range: -58°F to 221°F (-50°C to 105°C)

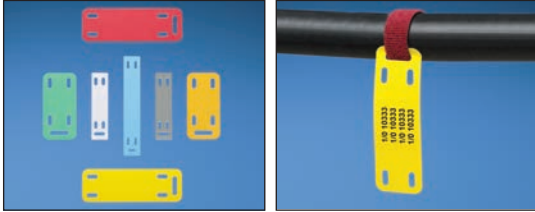

Part Number	Color	Width		Height		Print-On Area Width		Cable Type	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm			
M200X050Y6T	TIA Yellow	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
M200X050Y7T	White									
M200X050ACT	TIA Blue									
M200X050AET	TIA Green									
M200X050AFT	TIA Gray									
M200X050AGT	TIA Orange									
M200X050AIT	TIA Red									
M200X100Y6T	TIA Yellow	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	2000			
M200X100Y6T-B	White									
M200X100Y7T	White									
M200X100Y7T-B	White									
M200X100ACT	TIA Blue									
M200X100AET	TIA Green									
M200X100AFT	TIA Gray									
M200X100AGT	TIA Orange									
M200X100AIT	TIA Red									
M300X050Y6T	TIA Yellow	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	
M300X050Y7T	White									
M300X050ACT	TIA Blue									
M300X050AET	TIA Green									
M300X050AFT	TIA Gray									
M300X050AGT	TIA Orange									
M300X050AIT	TIA Red									
M300X100Y6T	TIA Yellow	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties	2000			
M300X100Y7T	White									
M300X100ACT	TIA Blue									
M300X100AET	TIA Green									
M300X100AFT	TIA Gray									
M300X100AGT	TIA Orange									
M300X100AIT	TIA Red									

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Military Grade Single-Sided Heat Shrink Labels

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS- DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205



Part Number	Part Number	Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
				In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H050X025H1T*	H050X025H2T	H050X025H3T	H050X025H4T	0.13	3.1	0.50	12.7	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	4	2000	1
H075X025H1T*	H075X025H2T	H075X025H3T	H075X025H4T			0.75	19.1								2	1000	
H100X025H1T*	H100X025H2T	H100X025H3T	H100X025H4T			1.00	25.4								1	500	
H150X025H1T*	H150X025H2T	H150X025H3T	H150X025H4T			1.50	38.1										
H200X025H1T*	H200X025H2T	H200X025H3T	H200X025H4T			2.00	50.8										
H050X034H1T*	H050X034H2T	H050X034H3T	H050X034H4T	0.19	4.7	0.50	12.7	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	4	2000	1
H075X034H1T*	H075X034H2T	H075X034H3T	H075X034H4T			0.75	19.1								2	1000	
H100X034H1T*	H100X034H2T	H100X034H3T	H100X034H4T			1.00	25.4								1	500	
H150X034H1T*	H150X034H2T	H150X034H3T	H150X034H4T			1.50	38.1										
H200X034H1T*	H200X034H2T	H200X034H3T	H200X034H4T			2.00	50.8										
H050X044H1T*	H050X044H2T	H050X044H3T	H050X044H4T	0.25	6.3	0.50	12.7	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	4	2000	1
H075X044H1T*	H075X044H2T	H075X044H3T	H075X044H4T			0.75	19.1								2	1000	
H100X044H1T*	H100X044H2T	H100X044H3T	H100X044H4T			1.00	25.4								1	500	
H150X044H1T*	H150X044H2T	H150X044H3T	H150X044H4T			1.50	38.1										
H200X044H1T*	H200X044H2T	H200X044H3T	H200X044H4T			2.00	50.8										
H050X064H1T*	H050X064H2T	H050X064H3T	H050X064H4T	0.38	9.7	0.50	12.7	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	4	2000	1
H100X064H1T*	H100X064H2T	H100X064H3T	H100X064H4T			1.00	25.4								2	1000	
H200X064H1T*	H200X064H2T	H200X064H3T	H200X064H4T			2.00	50.8								1	500	
H050X084H1T	—	—	—	0.50	12.7	0.50	12.7	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	4	2000	1
H100X084H1T	H100X084H2T	H100X084H3T	H100X084H4T			1.00	25.4								2	1000	
H200X084H1T	H200X084H2T	H200X084H3T	H200X084H4T			2.00	50.8								1	500	
H050X165H1T	—	—	—	1.00	25.4	0.50	12.7	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	4	2000	1
H100X165H1T	H100X165H2T	H100X165H3T	H100X165H4T			1.00	25.4								2	500	
H200X165H1T	H200X165H2T	H200X165H3T	H200X165H4T			2.00	50.8								1	250	
H200X240H1T	H200X240H2T	—	—	1.50	38.1	2.00	50.8	2.40	61.0	0.50	12.7	1.50	38.1	1 AWG – 1000 MCM	1	100	

Order number of labels required in multiples of Standard Package Quantity.  
 \*Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number

## Military Grade Two-Sided Heat Shrink Labels

**PATENTED**

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A,C and D when printed using resin or hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205



Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Qty. (Roll)
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X025H1T-2	H100X025H2T-2	0.13	3.1	1.00	25.4	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	2	1000	1
H100X025H1T-2-B	H100X025H2T-2-B			2.00	50.8									5000	
H200X025H1T-2	H200X025H2T-2			2.00	50.8									500	
H200X025H1T-2-B	H200X025H2T-2-B			2.00	50.8									2500	
H100X034H1T-2	H100X034H2T-2	0.19	4.7	1.00	25.4	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	2	1000	1
H100X034H1T-2-B	H100X034H2T-2-B			2.00	50.8									5000	
H200X034H1T-2	H200X034H2T-2			2.00	50.8									500	
H200X034H1T-2-B	H200X034H2T-2-B			2.00	50.8									2500	
H100X044H1T-2	H100X044H2T-2	0.25	6.3	1.00	25.4	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	1
H100X044H1T-2-B	H100X044H2T-2-B			2.00	50.8									5000	
H200X044H1T-2	H200X044H2T-2			2.00	50.8									500	
H200X044H1T-2-B	H200X044H2T-2-B			2.00	50.8									2500	
H100X064H1T-2	H100X064H2T-2	0.38	9.7	1.00	25.4	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	1
H100X064H1T-2-B	H100X064H2T-2-B			2.00	50.8									5000	
H200X064H1T-2	H200X064H2T-2			2.00	50.8									500	
H200X064H1T-2-B	H200X064H2T-2-B			2.00	50.8									2500	
H100X084H1T-2	H100X084H2T-2	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	1
H100X084H1T-2-B	H100X084H2T-2-B			2.00	50.8									5000	
H200X084H1T-2	H200X084H2T-2			2.00	50.8									500	
H200X084H1T-2-B	H200X084H2T-2-B			2.00	50.8									2500	
H100X122H1T-2	H100X122H2T-2	0.75	19.0	1.00	25.4	1.22	31.0	0.25	6.3	0.75	19.0	8 – 4/0 AWG	2	500	1
H200X122H1T-2	H200X122H2T-2			2.00	50.8									250	
H100X165H1T-2	H100X165H2T-2	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	1
H200X165H1T-2	H200X165H2T-2			2.00	25.4									250	

Order number of labels required in multiples of Standard Package Quantity.

## Halogen-Free Two-Sided Heat Shrink Labels

**PATENTED**

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions; Smoke Density Class II
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbon
- Temperature range: -22°F to 221°F (-30°C to 105°C)



Part Number	Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X025HFT-2	H100X025HGT-2	0.13	3.1	1.00	25.4	0.25	6.4	0.06	1.5	0.13	3.3	22 – 18 AWG	2	1000	1
H200X025HFT-2	H200X025HGT-2			2.00	50.8								1	500	
H100X034HFT-2	H100X034HGT-2	0.19	4.7	1.00	25.4	0.34	8.6	0.09	2.3	0.19	4.8	18 – 12 AWG	2	1000	
H200X034HFT-2	H200X034HGT-2			2.00	50.8								1	500	
H100X044HFT-2	H100X044HGT-2	0.25	6.4	1.00	25.4	0.44	11.1	0.13	3.3	0.25	6.4	16 – 10 AWG	2	1000	
H200X044HFT-2	H200X044HGT-2			2.00	50.8								1	500	
H100X064HFT-2	H100X064HGT-2	0.38	9.7	1.00	25.4	0.64	16.2	0.19	4.8	0.38	9.7	12 – 6 AWG	2	1000	
H200X064HFT-2	H200X064HGT-2			2.00	50.8								1	500	
H100X084HFT-2	H100X084HGT-2	0.50	12.7	1.00	25.4	0.84	21.3	0.25	6.4	0.50	12.7	8 – 1 AWG	2	1000	
H200X084HFT-2	H200X084HGT-2			2.00	50.8								1	500	
H100X165HFT-2	H100X165HGT-2	1.00	25.4	1.00	25.4	1.65	41.9	0.50	12.7	1.00	25.4	8 AWG – 500 MCM	2	500	
H200X165HFT-2	H200X165HGT-2			2.00	50.8								1	250	

Order number of labels required in multiples of Standard Package Quantity.



## Fluid-Resistant Two-Sided Heat Shrink Labels

**PATENTED**

- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Cross-linked, semi-rigid, fluid-resistant, shrinkable polyolefin material
- Available in yellow only
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties AMS-DTL-23053/6 Class 1 and NF F00-608 Class A and H when printed with resin thermal transfer ribbons

- Meet SAE-AS5942, MIL-STD-883F Method 2015.13 Solutions A and D, and MIL-STD-202G Method 215K, Solutions A and D when printed with resin thermal transfer ribbons
- Shrink ratio 3:1
- Use thermal transfer RMER4BL-C resin ribbon
- Temperature range: -67°F to 275°F (-55°C to 135°C)



Part Number	Diameter		Width		Height		Min. Cable O.D.		Max. Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm				
H100X034HST-2	0.19	4.7	1.00	25.4	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	2	1000	1
H200X034HST-2			2.00	50.8								1	500	
H100X044HST-2	0.25	6.4	1.00	25.4	0.44	11.1	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	
H200X044HST-2			2.00	50.8								1	500	
H100X064HST-2	0.38	9.7	1.00	25.4	0.64	16.2	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	
H200X064HST-2			2.00	50.8								1	500	
H100X084HST-2	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	
H200X084HST-2			2.00	50.8								1	500	
H100X165HST-2	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	1000	
H200X165HST-2			2.00	50.8								1	250	

Order number of labels required in multiples of Standard Package Quantity.

## Raised Panel Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm		
C120X150APT-22	White	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
C120X150A8T-22	Yellow										
C120X150AST-22	Green										
C120X150AWT-22	Red										
C120X150A0T-22	Black										
C120X190APT-22	White	1.90	48.3	0.85	21.6	1.18	30.0	2			
C120X190A8T-22	Yellow										
C120X190AST-22	Green										
C120X190AWT-22	Red										
C120X190A0T-22	Black										
C180X180APT-30	White	1.80	45.7	1.80	45.7	0.36	9.1	1.18	30.0	1	
C180X180A8T-30	Yellow										
C180X180AST-30	Green										
C180X180AWT-30	Red										
C180X180A0T-30	Black										
C240X240APT-30	White	2.40	61.0	2.40	61.0	0.90	22.9	1			
C240X240A8T-30	Yellow										
C240X240AST-30	Green										
C240X240AWT-30	Red										
C240X240A0T-30	Black										

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Raised Panel Push Button Over-Laminate Labels

- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

Part Number	Color	Width		Height		Hole Diameter		Labels Per Roll	Std. Pkg. Qty.	
		In.	mm	In.	mm	In.	mm			
C120X150YK-22	Clear	1.20	30.5	1.50	38.1	0.87	22.0	3	500	
C120X190YK-22				1.90	48.3					
C180X180YK-30		1.80	45.7	1.80	45.7	1.18	30.0			2
C240X240YK-30		2.40	60.9	2.40	60.9	1.18	30.0			1

Order number of labels required in multiples of Standard Package Quantity.

## Raised Panel Half Push Button Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm	In.	mm	In.	mm		
C180X130APT-30H	White	1.80	45.7	1.30	33.0	0.73	18.5	1.18	30.0	1	500
C240X200APT-30H		2.40	61.0	2.00	50.8	1.43	36.3				

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Raised Panel Component Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C100X050APT	White	1.00	25.4	0.50	12.7	3	500
C100X050A8T	Yellow						
C100X050AST	Green						
C100X050AUT	Orange						
C100X050AWT	Red						
C100X050A0T	Black						
C100X050AMT	Silver	1.25	31.8	0.30	7.6		
C125X030APT	White						
C125X030A0T	Black						
C170X090APT	White	1.70	43.2	0.90	22.9		
C170X090A8T	Yellow						
C170X090AST	Green						
C170X090AWT	Red						
C170X090AMT	Silver						
C200X100APT	White	2.00	50.8	1.00	25.4		
C200X100A8T	Yellow						
C200X100AST	Green						
C200X100AUT	Orange						
C200X100AWT	Red						
C200X100A0T	Black						
C200X100AMT	Silver	2.52	64.0	0.30	7.6		
C252X030APT	White						
C252X030A0T	Black	3.00	76.2	1.00	25.4	1	
C300X100APT	White						
C300X100A8T	Yellow						
C300X100AUT	Orange						
C300X100AWT	Red						
C300X100A0T	Black			2.50	63.5		
C300X250APT	White						
C300X250A8T	Yellow						
C300X250AST	Green						
C300X250AUT	Orange						
C300X250AWT	Red	3.50	88.9	3.00	76.2		
C300X250A0T	Black						
C300X250AMT	Silver						
C350X300APT	White	3.79	96.3	0.30	7.6		
C379X030AQT	Blue						
C379X030AWT	Red						
C379X030A0T	Black	4.00	101.6	1.00	25.4		
C400X100APT	White						
C400X100A8T	Yellow						
C400X100AST	Green						
C400X100AUT	Orange						
C400X100AWT	Red						
C400X100A0T	Black	4.00	101.6	1.00	25.4		
C400X100AMT	Silver						

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.

## Raised Panel Component Over-Laminate Labels


- Provide additional print protection in harsh environments
- Over-laminates are not printable
- Temperature range: -51°F to 275°F (-46°C to 135°C)

Part Number	Color	Width		Height		Labels Per Roll	Std. Pkg. Qty.
		In.	mm	In.	mm		
C100X050YK	Clear	1.00	25.4	0.50	12.7	1	500
C170X090YK		1.70	43.2	0.90	22.9		
C200X100YK		2.00	50.8	1.00	25.4		
C300X100YK		3.00	76.2	1.00	25.4		
C300X250YK		2.50	63.5				
C350X300YK		3.50	88.9	3.00	76.2		
C400X100YK		4.00	101.6	1.00	25.4		

Order number of labels required in multiples of Standard Package Quantity.

## Raised Panel Pre-Printed Emergency Stop Labels

- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576

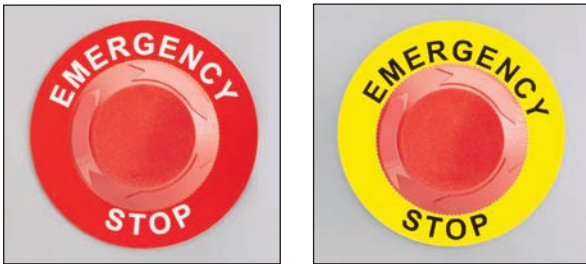

Part Number	Color	Diameter		Hole Diameter		Std. Pkg. Qty.
		In.	mm	In.	mm	
C235A8-30-ES	Black on Yellow	2.35	60.0	1.18	30.0	25
C235AW-30-ES	White on Red					
C350A8-30-ES	Black on Yellow	3.50	89.0			
C350AW-30-ES	White on Red					

Order number of labels required in multiples of Standard Package Quantity.

## Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.		
		In.	mm	In.	mm				
C025X025YJT	White	0.25	6.4	0.25	6.4	12	10000		
C038X038YJT		0.38	9.7	0.38	9.7	7			
C050X044YJT		0.50	12.7	0.44	11.2	5			
C060X020YJT		0.60	15.2	0.20	5.1	3			
C075X025YJT		Silver	0.75	19.1	0.25			6.4	
C075X025YMT	0.25				6.4				
C080X020YJT	White	0.80	20.3	0.20	5.1	3			
C090X025YJT		0.90	22.9	0.25	6.4				
C100X025YJT		1.00	25.4	0.25	6.4				
C100X038YJT				0.38	9.7				
C100X050YJT		Clear	25.4	0.50	12.7		3		
C100X050YKT	0.50					12.7			
C100X050YMT	Silver								
C125X038YJT	White	1.25	31.8	0.38	9.7	3			
C150X050YJT		1.50	38.1	0.50	12.7				
C150X075YJT				0.75	19.1				
C150X075YMT	Silver	1.60	40.6	0.20	5.1	5000			
C160X020YJT	White			2.00	50.8	0.25	6.4	10000	
C200X025YJT		0.38	9.7			5000			
C200X038YJT		0.50	12.7						
C200X050YJT		Clear	1.00				25.4		
C200X100YJT						Silver			
C200X100YKT	White	2.75	69.9	1.25	31.8	2500			
C200X100YMT				Silver					
C275X125YJT	White	3.00	76.2	0.25	6.4	1			
C275X125YMT				0.38	9.7				
C300X025YJT				1.00	25.4		2500		
C300X038YJT				Silver	2.00		50.8	2.00	50.8
C300X100YJT								1000	
C300X100YMT	White	3.50	88.9	1.00	25.4	2500			
C300X200YJT				Silver	2.00	50.8	2.00	50.8	
C300X200YMT							1000		
C350X100YJT	White	4.00	101.6	3.00	76.2	2500			
C400X100YJT				Silver	4.00	101.6	4.00	101.6	
C400X200YJT							2500		
C400X200YMT				White	4.00	101.6	6.00	152.4	1000
C400X300YJT							1000		
C400X400YJT									
C400X600YJT									


Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores,  
 the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.

## Super-Tack Polyester Component Labels

- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Meets DIN 40050-9, IP69K for washdown applications

- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Type of Application	Labels Per Row	Std. Pkg. Qty.					
		In.	mm	In.	mm								
C061X030YPT	White	0.61	15.5	0.30	7.6	1-port	4	2500					
C100X050YPT		1.00	25.4	0.50	12.7	general identifier	3	10000					
C125X030YPT		1.25	31.8	0.30	7.6	2-port							
C138X019YPT	Black	1.38	35.1	0.19	4.8	module	1	2500					
C138X019Y0T													
C188X030YPT	White	1.88	47.8	0.30	7.6	3-port	1	2500					
C200X100YPT	Black	2.00	50.8	1.00	25.4	general identifier							
C200X100Y0T													
C252X030YPT	White	2.52	64.0	0.30	7.6	4-port	1	2500					
C252X030YPT-P*						TIA Blue							
C252X030YQT-P*						TIA Brown							
C252X030YRT-P*						TIA Green							
C252X030YST-P*						TIA Gray							
C252X030YTT-P*						TIA Orange							
C252X030YUT-P*						TIA Purple							
C252X030YVT-P*						TIA Red							
C252X030YWT-P*						Black							
C252X030Y0T-P*						TIA Yellow							
C252X030Y8T-P*						Gold							
C252X030Y9T-P*						1, 2, 3, or 4-port							
C261X030YPT						White			2.61	66.3	0.30	7.6	4-port
C275X125YPT									Black	2.75	69.9	1.25	31.8
C275X125Y0T													
C288X030YPT	White	2.88	73.2	0.30	7.6	5-port	1	2500					
C300X200YPT		3.00	76.2	2.00	50.8	general identifier							
C315X030YPT		3.15	80.0	0.30	7.6	5-port							
C379X030YPT		Black	3.79	96.3	0.30	7.6			6-port				
C379X030YPT-P*									TIA Blue				
C379X030YQT-P*									TIA Brown				
C379X030YRT-P*									TIA Green				
C379X030YST-P*									TIA Gray				
C379X030YTT-P*									TIA Orange				
C379X030YUT-P*									TIA Purple				
C379X030YVT-P*	TIA Red												
C379X030YWT-P*	Black												
C379X030Y0T-P*	TIA Yellow												
C379X030Y8T-P*	Gold												
C379X030Y9T-P*	1, 2, 3, 4, 5 or 6-port												
C400X200Y8T	Yellow	4.00	101.6	2.00	50.8	general identifier	1000						
C400X300YPT	White			3.00	76.2		2500						

\*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications.  
 Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Tedlar® Component Labels

- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C060X020TJT	White	0.60	15.2	0.20	5.1	3	10000
C090X025TJT		0.90	22.9	0.25	6.4		
C100X038TJT		1.00	25.4	0.38	9.7		
C100X050TJT				0.50	12.7		
C125X038TJT		1.25	31.8	0.38	9.7	1	2500
C200X038TJT		2.00	50.8				1.00
C200X100TJT				3.00	76.2	0.38	9.7
C300X038TJT							5000

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company. Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Tamper-Evident Polyester Component Labels

- Leaves a checkerboard of silver material allowing you to see if label has been tampered with
- Use thermal transfer resin ribbon
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm		
C075X025AAT	Silver	0.75	19.1	0.25	6.4	3	10000
C100X050AAT		1.00	25.4	0.50	12.7		
C200X100AAT		2.00	50.8	1.00	25.4	1	2500
C275X125AAT		2.75	69.9	1.25	31.8		

Order number of labels required in multiples of Standard Package Quantity. Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.



## Non-Adhesive Polyester Component Labels

- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbon
- Temperature range: -10°F to 302°F (-23°C to 150°C)



Part Number	Color	Width		Height		Application	Labels Per Row	Std. Pkg. Qty.
		In.	mm	In.	mm			
C150X030Y1T	White	1.50	38.1	0.30	7.6	3-port identifier	2	1000
C195X040Y1T		1.95	49.5	0.40	10.2	Single-gang faceplate		
C261X035Y1T		2.61	66.3	0.35	8.9	4-port identifier		
C288X040Y1T		2.88	73.2	0.40	10.2	Double-gang faceplate		
C390X030Y1T		3.90	99.1	0.30	7.6	6-port identifier		
C750X050Y1T		7.50	190.5	0.50	12.7	110 block		
C788X050Y1T		7.88	200.2	0.50	12.7	GP6™ Punchdown System		

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Vinyl Cloth Component Labels

- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbon
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.			
		In.	mm	In.	mm					
C050X044CBT	White	0.50	12.7	0.44	11.2	5	10000			
C060X020CBT		0.60	15.2	0.20	5.1	3				
C075X025CBT		0.75	19.1	0.25	6.4					
C100X025CBT		1.00	25.4					0.38	9.7	
C100X038CBT				0.50	12.7					
C100X050CBT				1	50.8	101.6		0.75	19.1	5000
C150X075CBT		1.60	40.6					0.20	5.1	10000
C160X020CBT		2.00	50.8					0.50	12.7	5000
C200X050CBT		4.00	101.6					1.00	25.4	2500

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Polyimide Component Labels

- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process

- Use thermal transfer RMER4BL-C or RHER4BL-C resin ribbon on white polyimide
- Use thermal transfer hybrid ribbon on tan polyimide
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.	
		In.	mm	In.	mm			
C025X025KBT	White	0.25	6.4	0.25	6.4	12	10000	
C025X025KCT	Tan							
C038X038KBT	White	0.38	9.7	0.38	9.7	7		
C038X038KCT	Tan							
C050X013KBT	White	0.50	12.7	0.13	3.3	5		
C050X013KCT	Tan			0.20	5.1			
C050X020KBT	White							0.44
C050X044KCT	Tan							
C060X020KBT	White	0.60	15.3	0.20	5.1	3		
C060X020KCT	Tan							
C065X019KBT	White	0.65	16.5	0.19	4.8			
C065X019KCT	Tan							
C075X025KBT	White	0.75	19.1	0.25	6.4			
C075X025KCT	Tan							
C080X020KBT	White	0.80	20.3	0.20	5.1			
C080X020KCT	Tan							
C090X025KBT	White	0.90	22.9	0.25	6.4			
C090X025KCT	Tan							
C100X019KBT	White	1.00	25.4	0.19	4.8			2
C100X019KCT	Tan			0.25	6.4			
C100X025KBT	White							
C100X025KCT	Tan							
C100X038KBT	White	1.25	31.8	0.25	6.4			
C100X038KCT	Tan							
C125X025KBT	White	1.25	31.8	0.25	6.4			
C125X025KCT	Tan							
C150X025KBT	White	1.50	38.1	0.25	6.4	5000		
C150X025KCT	Tan							
C160X020KBT	White	1.60	40.6	0.20	5.1	10000		
C160X020KCT	Tan							
C200X025KBT	White	2.00	50.8	0.25	6.4	1		
C200X025KCT	Tan			0.38	9.7			
C200X038KBT	White						3.00	76.2
C300X025KBT				Tan				
C300X025KCT	Tan							

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

Contact Technical Support at 866.871.4571.