



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**M8-Round-Plug Connector, Single-Ended Cordsets,
According to IEC 61976-2-104**


RKMV | RKMVV



3-, 4-, and 8-Poles


Actuator/sensor cordset, single-ended, M8, 3-, 4-, and 8-poles, female straight connector with self-locking threaded joint and molded cable.

RKMV

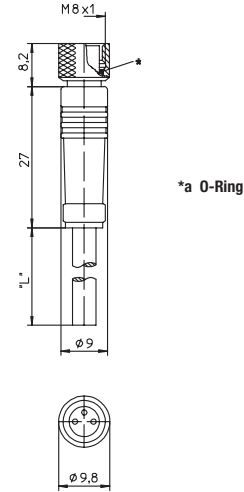

Actuator/sensor cordset, single-ended, M8, 3-, 4-, and 8-poles, female 90° connector with self-locking threaded joint and molded cable.


RKMVV

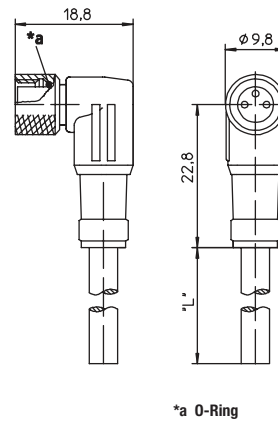

Pin Assignments

M8

3 poles



- 1 = brown
- 3 = blue
- 4 = black

4 poles




- 1 = brown
- 2 = white
- 3 = blue
- 4 = black

8 poles



- 1 = white
- 2 = brown
- 3 = green
- 4 = yellow
- 5 = grey
- 6 = pink
- 7 = blue
- 8 = red



Be Certain with Belden

M8-Round-Plug Connector, Single-Ended Cordsets, According to IEC 61976-2-104

RKMV 3 | RKMV 4 | RKMV 8 | RKMWV 3 | RKMWV 4

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
Operating temperature range -40°C (-40°F) / +90°C (+194°F)

Mechanical

Housing / Molded body TPU
Insert PA / TPU
Contact CuZn, pre-nickelated and 0.8 microns gold-plated
Coupling nut CuZn, nickel-plated

Electrical data

Contact resistance ≤ 5 mΩ
Nominal current at 40°C 4 A
Nominal voltage 3 poles 60 V
4 poles 30 V
Rated voltage 3 poles 63 V
4 poles 36 V
Test voltage 3 poles 1.5 kV eff. / 60 s
4 poles 0.8 kV eff. / 60 s
Insulation resistance > 10⁹ Ω
Pollution degree 3

Cable Specifications

Cable No.	Outer Jacket	Conductor Size	Jacket Color	OD
06	PVC	3 x 0.34 mm ²	Orange	.197" (5.0 mm)
07	PVC	4 x 0.75 mm ²	Orange	.197" (5.0 mm)
224	PUR, halogen-free	3 x 0.34 mm ²	Black	.169" (4.3 mm)
225	PUR, halogen-free	4 x 0.34 mm ²	Black	.185" (4.7 mm)
354	PUR, halogen-free	8 x 0.14 mm ²	Black	.197" (5.0 mm)

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RKMV 3-06/...M	3	PVC	2 M / 5 M / 10 M	
RKMV 3-224/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKMV 4-07/...M	4	PVC	2 M / 5 M / 10 M	
RKMV 4-225/...M		PUR, halogen-free	2 M / 5 M / 10 M	
RKMV 8-354/...M	8	PUR, halogen-free	2 M / 5 M / 10 M	