



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



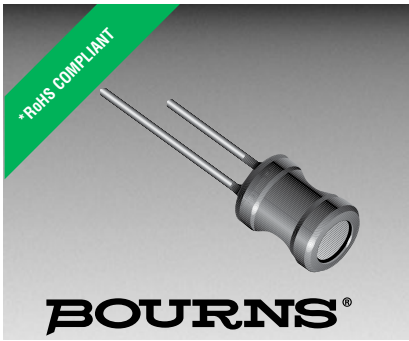

## Features

- Four types available
- High rated current for high current circuits
- Available in E12 series
- RoHS compliant\*

## Applications

- Power supplies
- DC/DC converters
- General use

# RLB Series Radial Lead Inductors

### General Specifications


Operating Temperature.....-40 °C to +105 °C  
 Storage Temperature.....-40 °C to +105 °C

### Materials


Core Material..... Ferrite DR core  
 Wire..... Enameled copper wire  
 Terminal..... Cu/Sn  
 Tube..... Shrinkable tube 125 °C, 600 V

### Product Dimensions


RLB0608, RLB0812, RLB1014,  
RLB0712, RLB0914 Series

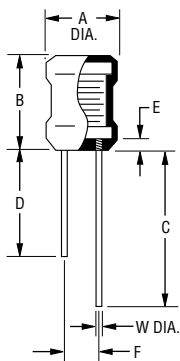


RLB0912 Series



RLB1314-680K  
through  
RLB1314-153K



RLB1314-3R3M  
through  
RLB1314-470K



| Series  | A                                      | B   | C                                       | D                                      | E                            | F                                     | W (DIA.)               | Inductance Range           |
|---------|--|---|---|--|------------------------------|---------------------------------------|------------------------|----------------------------|
| RLB0608 | $\frac{5.0 \pm 0.5}{(.197 \pm .020)}$  | $\frac{6.5 +1.0/ 0.5}{(.256 +.039/.020)}$ | $\frac{28.0 \pm 5.0}{(1.102 \pm .197)}$ | $\frac{20.0 \pm 5.0}{(.787 \pm .197)}$ | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{2.0 \pm 0.5}{(.079 \pm .020)}$ | $\frac{0.50}{(.020)}$  | 1.0 $\mu$ H - 2200 $\mu$ H |
| RLB0812 | $\frac{6.7 \pm 0.5}{(.264 \pm .020)}$  | $\frac{10.0 \pm 1.0}{(.394 \pm .039)}$    | $\frac{25.0 \pm 5.0}{(.984 \pm .197)}$  | $\frac{18.0 \pm 5.0}{(.709 \pm .197)}$ | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{3.0 \pm 0.5}{(.118 \pm .020)}$ | $\frac{0.65}{(.026)}$  | 47 $\mu$ H - 47 mH         |
| RLB1014 | $\frac{8.7 \pm 0.5}{(.343 \pm .020)}$  | $\frac{12.0 \pm 1.0}{(.472 \pm .039)}$    | $\frac{25.0 \pm 5.0}{(.984 \pm .197)}$  | $\frac{18.0 \pm 5.0}{(.709 \pm .197)}$ | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{5.0 \pm 0.8}{(.197 \pm .031)}$ | $\frac{0.65}{(.026)}$  | 100 $\mu$ H - 82 mH        |
| RLB0712 | $\frac{6.7 \pm 0.5}{(.264 \pm .020)}$  | $\frac{10.0 \pm 1.0}{(.394 \pm .039)}$    | $\frac{25.0 \pm 5.0}{(.984 \pm .197)}$  | $\frac{18.0 \pm 5.0}{(.709 \pm .197)}$ | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{3.0 \pm 0.5}{(.118 \pm .020)}$ | $\frac{0.65}{(.026)}$  | 10 $\mu$ H - 560 $\mu$ H   |
| RLB0912 | $\frac{8.7 \pm 0.5}{(.343 \pm .020)}$  | $\frac{10.0 \pm 1.0}{(.394 \pm .039)}$    | $\frac{5.0 \pm 1.0}{(.197 \pm .039)}$   | -                                      | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{5.0 \pm 0.8}{(.197 \pm .031)}$ | $\frac{0.65}{(.026)}$  | 1.5 $\mu$ H - 1000 $\mu$ H |
| RLB0914 | $\frac{8.7 \pm 0.5}{(.343 \pm .020)}$  | $\frac{12.0 \pm 1.0}{(.472 \pm .039)}$    | $\frac{25.0 \pm 5.0}{(.984 \pm .197)}$  | $\frac{18.0 \pm 5.0}{(.709 \pm .197)}$ | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{5.0 \pm 0.8}{(.197 \pm .031)}$ | $\frac{0.65}{(.026)}$  | 3.3 $\mu$ H - 1000 $\mu$ H |
| RLB1314 | $\frac{11.7 \pm 0.8}{(.461 \pm .031)}$ | $\frac{12.0 \pm 1.0}{(.472 \pm .039)}$    | $\frac{15.0 \pm 3.0}{(.591 \pm .118)}$  | -                                      | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .039)}$ | Per Specs.<br>(Page 7) | 3.3 $\mu$ H - 47 $\mu$ H   |
|         | $\frac{11.7 \pm 0.8}{(.461 \pm .031)}$ | $\frac{12.0 \pm 1.0}{(.472 \pm .039)}$    | $\frac{15.0 \pm 3.0}{(.591 \pm .118)}$  | $\frac{18.0 \pm 3.0}{(.709 \pm .128)}$ | $\frac{2.5 + 0}{(.098 + 0)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .031)}$ | $\frac{0.80}{(.031)}$  | 68 $\mu$ H - 15 mH         |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

\* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# RLB Series Radial Lead Inductors

**BOURNS®**

## Electrical Schematic



## Typical Part Marking



Inductance Code:  
 - First two digits are significant  
 - Third digit represents the number of zeroes to follow

• Indicates start of winding

## Electrical Characteristics - RLB0608 Series

NOTE: Temperature rise..... 20 °C max. at rated current

| Bourns Part Number | Inductance (μH) | Q Ref. | Test Freq. (MHz) L, Q | SRF (MHz) Min. | RDC (Ω) Max. | IDC (mA) Max. |
|--------------------|-----------------|--------|-----------------------|----------------|--------------|---------------|
| RLB0608-1R0ML      | 1.0 ± 20 %      | 60     | 7.96                  | 105.0          | 0.10         | 1030          |
| RLB0608-1R2ML      | 1.2 ± 20 %      | 60     | 7.96                  | 90.0           | 0.15         | 980           |
| RLB0608-1R5ML      | 1.5 ± 20 %      | 60     | 7.96                  | 75.0           | 0.20         | 920           |
| RLB0608-1R8ML      | 1.8 ± 20 %      | 60     | 7.96                  | 70.0           | 0.22         | 880           |
| RLB0608-2R2ML      | 2.2 ± 20 %      | 60     | 7.96                  | 65.0           | 0.24         | 830           |
| RLB0608-2R7ML      | 2.7 ± 20 %      | 60     | 7.96                  | 60.0           | 0.27         | 790           |
| RLB0608-3R3ML      | 3.3 ± 20 %      | 60     | 7.96                  | 50.0           | 0.30         | 750           |
| RLB0608-3R9ML      | 3.9 ± 20 %      | 60     | 7.96                  | 45.0           | 0.30         | 720           |
| RLB0608-4R7ML      | 4.7 ± 20 %      | 60     | 7.96                  | 40.0           | 0.35         | 670           |
| RLB0608-5R6KL      | 5.6 ± 10 %      | 60     | 7.96                  | 35.0           | 0.35         | 640           |
| RLB0608-6R8KL      | 6.8 ± 10 %      | 60     | 7.96                  | 30.0           | 0.40         | 620           |
| RLB0608-8R2KL      | 8.2 ± 10 %      | 60     | 7.96                  | 25.0           | 0.40         | 590           |
| RLB0608-100KL      | 10.0 ± 10 %     | 60     | 2.52                  | 20.0           | 0.45         | 550           |
| RLB0608-120KL      | 12.0 ± 10 %     | 60     | 2.52                  | 15.0           | 0.50         | 530           |
| RLB0608-150KL      | 15.0 ± 10 %     | 60     | 2.52                  | 13.0           | 0.55         | 500           |
| RLB0608-180KL      | 18.0 ± 10 %     | 60     | 2.52                  | 11.0           | 0.60         | 480           |
| RLB0608-220KL      | 22.0 ± 10 %     | 60     | 2.52                  | 10.0           | 0.65         | 460           |
| RLB0608-270KL      | 27.0 ± 10 %     | 50     | 2.52                  | 9.0            | 0.75         | 430           |
| RLB0608-330KL      | 33.0 ± 10 %     | 50     | 2.52                  | 8.0            | 0.85         | 410           |
| RLB0608-390KL      | 39.0 ± 10 %     | 50     | 2.52                  | 7.5            | 0.90         | 390           |
| RLB0608-470KL      | 47.0 ± 10 %     | 50     | 2.52                  | 7.0            | 1.00         | 370           |
| RLB0608-560KL      | 56.0 ± 10 %     | 50     | 2.52                  | 6.5            | 1.20         | 350           |
| RLB0608-680KL      | 68.0 ± 10 %     | 50     | 2.52                  | 6.0            | 1.30         | 340           |
| RLB0608-820KL      | 82.0 ± 10 %     | 50     | 2.52                  | 5.5            | 1.50         | 320           |
| RLB0608-101KL      | 100.0 ± 10 %    | 50     | 0.796                 | 5.0            | 1.70         | 305           |
| RLB0608-121KL      | 120.0 ± 10 %    | 50     | 0.796                 | 4.8            | 1.90         | 290           |
| RLB0608-151KL      | 150.0 ± 10 %    | 50     | 0.796                 | 4.4            | 2.10         | 275           |
| RLB0608-181KL      | 180.0 ± 10 %    | 50     | 0.796                 | 4.2            | 2.30         | 235           |
| RLB0608-221KL      | 220.0 ± 10 %    | 45     | 0.796                 | 3.8            | 2.50         | 200           |
| RLB0608-271KL      | 270.0 ± 10 %    | 45     | 0.796                 | 3.6            | 2.75         | 180           |
| RLB0608-331KL      | 330.0 ± 10 %    | 45     | 0.796                 | 3.3            | 4.68         | 165           |
| RLB0608-391KL      | 390.0 ± 10 %    | 45     | 0.796                 | 3.0            | 6.00         | 150           |
| RLB0608-471KL      | 470.0 ± 10 %    | 55     | 0.796                 | 2.8            | 6.50         | 140           |
| RLB0608-561KL      | 560.0 ± 10 %    | 55     | 0.796                 | 2.4            | 8.50         | 135           |
| RLB0608-681KL      | 680.0 ± 10 %    | 55     | 0.796                 | 2.2            | 9.00         | 125           |
| RLB0608-821KL      | 820.0 ± 10 %    | 55     | 0.796                 | 2.0            | 9.60         | 120           |
| RLB0608-102KL      | 1000.0 ± 10 %   | 55     | 0.252                 | 1.8            | 11.50        | 100           |
| RLB0608-152KL      | 1500.0 ± 10 %   | 50     | 0.252                 | 1.4            | 15.00        | 100           |
| RLB0608-222KL      | 2200.0 ± 10 %   | 50     | 0.252                 | 1.0            | 20.00        | 85            |

Packaging: 800 pieces per bag.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# RLB Series Radial Lead Inductors

**BOURNS®**

## Electrical Characteristics - RLB0812 Series

NOTE: Temperature rise..... 20 °C max. at rated current

| Bourns Part Number | Inductance ( $\mu$ H) | Q Ref. | Test Freq. (MHz) L, Q | SRF (MHz) Min. | RDC ( $\Omega$ ) Max. | IDC (mA) Max. |
|--------------------|-----------------------|--------|-----------------------|----------------|-----------------------|---------------|
| RLB0812-470KL      | 47 $\pm$ 10 %         | 30     | 2.52                  | 6.00           | 0.40                  | 450           |
| RLB0812-560KL      | 56 $\pm$ 10 %         | 30     | 2.52                  | 5.50           | 0.45                  | 400           |
| RLB0812-680KL      | 68 $\pm$ 10 %         | 30     | 2.52                  | 5.00           | 0.50                  | 360           |
| RLB0812-820KL      | 82 $\pm$ 10 %         | 30     | 2.52                  | 4.50           | 0.50                  | 340           |
| RLB0812-101KL      | 100 $\pm$ 10 %        | 45     | 0.796                 | 4.20           | 0.60                  | 320           |
| RLB0812-121KL      | 120 $\pm$ 10 %        | 45     | 0.796                 | 3.60           | 0.70                  | 300           |
| RLB0812-151KL      | 150 $\pm$ 10 %        | 45     | 0.796                 | 3.40           | 0.90                  | 280           |
| RLB0812-181KL      | 180 $\pm$ 10 %        | 45     | 0.796                 | 3.20           | 1.00                  | 260           |
| RLB0812-221KL      | 220 $\pm$ 10 %        | 45     | 0.796                 | 3.00           | 1.20                  | 240           |
| RLB0812-271KL      | 270 $\pm$ 10 %        | 45     | 0.796                 | 2.80           | 1.40                  | 220           |
| RLB0812-331KL      | 330 $\pm$ 10 %        | 45     | 0.796                 | 2.50           | 1.60                  | 200           |
| RLB0812-391KL      | 390 $\pm$ 10 %        | 45     | 0.796                 | 2.30           | 1.80                  | 180           |
| RLB0812-471KL      | 470 $\pm$ 10 %        | 45     | 0.796                 | 2.20           | 2.00                  | 160           |
| RLB0812-561KL      | 560 $\pm$ 10 %        | 45     | 0.796                 | 2.00           | 2.50                  | 150           |
| RLB0812-681KL      | 680 $\pm$ 10 %        | 45     | 0.796                 | 1.70           | 2.90                  | 140           |
| RLB0812-821KL      | 820 $\pm$ 10 %        | 45     | 0.796                 | 1.50           | 3.10                  | 130           |
| RLB0812-102KL      | 1000 $\pm$ 10 %       | 45     | 0.252                 | 1.40           | 3.90                  | 120           |
| RLB0812-122KL      | 1200 $\pm$ 10 %       | 60     | 0.252                 | 1.10           | 4.40                  | 110           |
| RLB0812-152KL      | 1500 $\pm$ 10 %       | 60     | 0.252                 | 0.90           | 6.00                  | 100           |
| RLB0812-182KL      | 1800 $\pm$ 10 %       | 60     | 0.252                 | 0.80           | 7.00                  | 90            |
| RLB0812-222KL      | 2200 $\pm$ 10 %       | 60     | 0.252                 | 0.75           | 8.00                  | 80            |
| RLB0812-272KL      | 2700 $\pm$ 10 %       | 60     | 0.252                 | 0.70           | 9.00                  | 70            |
| RLB0812-332KL      | 3300 $\pm$ 10 %       | 60     | 0.252                 | 0.60           | 12.00                 | 60            |
| RLB0812-392KL      | 3900 $\pm$ 10 %       | 60     | 0.252                 | 0.55           | 14.00                 | 55            |
| RLB0812-472KL      | 4700 $\pm$ 10 %       | 60     | 0.252                 | 0.50           | 16.00                 | 50            |
| RLB0812-562KL      | 5600 $\pm$ 10 %       | 60     | 0.252                 | 0.48           | 18.00                 | 45            |
| RLB0812-682KL      | 6800 $\pm$ 10 %       | 60     | 0.252                 | 0.44           | 24.00                 | 40            |
| RLB0812-822KL      | 8200 $\pm$ 10 %       | 60     | 0.252                 | 0.40           | 30.00                 | 36            |
| RLB0812-103KL      | 10000 $\pm$ 10 %      | 60     | 0.0796                | 0.36           | 39.00                 | 34            |
| RLB0812-123KL      | 12000 $\pm$ 10 %      | 60     | 0.0796                | 0.32           | 46.00                 | 32            |
| RLB0812-153KL      | 15000 $\pm$ 10 %      | 60     | 0.0796                | 0.30           | 54.00                 | 30            |
| RLB0812-183KL      | 18000 $\pm$ 10 %      | 60     | 0.0796                | 0.28           | 76.00                 | 27            |
| RLB0812-223KL      | 22000 $\pm$ 10 %      | 60     | 0.0796                | 0.24           | 92.00                 | 25            |
| RLB0812-273KL      | 27000 $\pm$ 10 %      | 60     | 0.0796                | 0.20           | 102.00                | 22            |
| RLB0812-333KL      | 33000 $\pm$ 10 %      | 60     | 0.0796                | 0.16           | 140.00                | 20            |
| RLB0812-393KL      | 39000 $\pm$ 10 %      | 60     | 0.0796                | 0.13           | 150.00                | 18            |
| RLB0812-473KL      | 47000 $\pm$ 10 %      | 60     | 0.0796                | 0.10           | 162.00                | 16            |

Packaging: 400 pieces per bag.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# RLB Series Radial Lead Inductors



## Electrical Characteristics - RLB1014 Series

NOTE: Temperature rise..... 40 °C typ. at rated I<sub>rms</sub>  
 Inductance drop..... 10 % typ at I<sub>sat</sub>

| Bourns Part Number | Inductance (μH) | Q Ref. | Test Freq. (MHz) L, Q | SRF (MHz) Min. | RDC (Ω) Max. | I <sub>rms</sub> (A) Typ. | I <sub>sat</sub> (A) Typ. |
|--------------------|-----------------|--------|-----------------------|----------------|--------------|---------------------------|---------------------------|
| RLB1014-101KL      | 100 ± 10 %      | 45     | 796.0                 | 3.20           | 0.85         | 0.78                      | 2                         |
| RLB1014-121KL      | 120 ± 10 %      | 45     | 796.0                 | 3.00           | 0.95         | 0.74                      | 1.93                      |
| RLB1014-151KL      | 150 ± 10 %      | 45     | 796.0                 | 2.80           | 1.05         | 0.68                      | 1.8                       |
| RLB1014-181KL      | 180 ± 10 %      | 45     | 796.0                 | 2.50           | 1.15         | 0.65                      | 1.55                      |
| RLB1014-221KL      | 220 ± 10 %      | 40     | 796.0                 | 2.10           | 1.30         | 0.62                      | 1.45                      |
| RLB1014-271KL      | 270 ± 10 %      | 40     | 796.0                 | 2.00           | 1.50         | 0.6                       | 1.33                      |
| RLB1014-331KL      | 330 ± 10 %      | 40     | 796.0                 | 1.95           | 1.70         | 0.55                      | 1.18                      |
| RLB1014-391KL      | 390 ± 10 %      | 40     | 796.0                 | 1.85           | 1.85         | 0.5                       | 1.1                       |
| RLB1014-471KL      | 470 ± 10 %      | 35     | 796.0                 | 1.55           | 2.30         | 0.45                      | 1                         |
| RLB1014-561KL      | 560 ± 10 %      | 35     | 796.0                 | 1.30           | 2.55         | 0.43                      | 0.95                      |
| RLB1014-681KL      | 680 ± 10 %      | 35     | 796.0                 | 1.15           | 2.85         | 0.42                      | 0.85                      |
| RLB1014-821KL      | 820 ± 10 %      | 35     | 796.0                 | 1.00           | 3.10         | 0.4                       | 0.8                       |
| RLB1014-102KL      | 1000 ± 10 %     | 50     | 252.0                 | 0.90           | 4.10         | 0.36                      | 0.6                       |
| RLB1014-122KL      | 1200 ± 10 %     | 50     | 252.0                 | 0.80           | 4.70         | 0.34                      | 0.36                      |
| RLB1014-152KL      | 1500 ± 10 %     | 50     | 252.0                 | 0.70           | 5.80         | 0.3                       | 0.32                      |
| RLB1014-182KL      | 1800 ± 10 %     | 50     | 252.0                 | 0.60           | 7.40         | 0.28                      | 0.3                       |
| RLB1014-222KL      | 2200 ± 10 %     | 50     | 252.0                 | 0.55           | 8.40         | 0.26                      | 0.27                      |
| RLB1014-272KL      | 2700 ± 10 %     | 50     | 252.0                 | 0.50           | 9.60         | 0.24                      | 0.25                      |
| RLB1014-332KL      | 3300 ± 10 %     | 50     | 252.0                 | 0.45           | 10.50        | 0.22                      | 0.23                      |
| RLB1014-392KL      | 3900 ± 10 %     | 50     | 252.0                 | 0.40           | 12.00        | 0.21                      | 0.21                      |
| RLB1014-472KL      | 4700 ± 10 %     | 45     | 252.0                 | 0.38           | 14.00        | 0.19                      | 0.195                     |
| RLB1014-562KL      | 5600 ± 10 %     | 45     | 252.0                 | 0.36           | 16.00        | 0.17                      | 0.18                      |
| RLB1014-682KL      | 6800 ± 10 %     | 40     | 252.0                 | 0.34           | 18.00        | 0.16                      | 0.165                     |
| RLB1014-822KL      | 8200 ± 10 %     | 40     | 252.0                 | 0.32           | 24.50        | 0.15                      | 0.155                     |
| RLB1014-103KL      | 10000 ± 10 %    | 50     | 79.6                  | 0.30           | 32.00        | 0.135                     | 0.145                     |
| RLB1014-123KL      | 12000 ± 10 %    | 50     | 79.6                  | 0.28           | 36.00        | 0.125                     | 0.13                      |
| RLB1014-153KL      | 15000 ± 10 %    | 50     | 79.6                  | 0.26           | 48.00        | 0.1                       | 0.11                      |
| RLB1014-183KL      | 18000 ± 10 %    | 45     | 79.6                  | 0.24           | 52.00        | 0.096                     | 0.1                       |
| RLB1014-223KL      | 22000 ± 10 %    | 45     | 79.6                  | 0.22           | 58.00        | 0.092                     | 0.095                     |
| RLB1014-273KL      | 27000 ± 10 %    | 45     | 79.6                  | 0.20           | 62.00        | 0.082                     | 0.085                     |
| RLB1014-333KL      | 33000 ± 10 %    | 45     | 79.6                  | 0.18           | 90.00        | 0.074                     | 0.075                     |
| RLB1014-393KL      | 39000 ± 10 %    | 40     | 79.6                  | 0.17           | 100.00       | 0.07                      | 0.072                     |
| RLB1014-473KL      | 47000 ± 10 %    | 35     | 79.6                  | 0.16           | 150.00       | 0.06                      | 0.065                     |
| RLB1014-563KL      | 56000 ± 10 %    | 35     | 79.6                  | 0.15           | 200.00       | 0.052                     | 0.06                      |
| RLB1014-683KL      | 68000 ± 10 %    | 35     | 79.6                  | 0.14           | 220.00       | 0.046                     | 0.056                     |
| RLB1014-823KL      | 82000 ± 10 %    | 30     | 79.6                  | 0.12           | 240.00       | 0.044                     | 0.052                     |
| RLB1014-104KL      | 100000 ± 10 %   | 30     | L: 1 kHz, Q: 79.6 kHz | 0.10           | 300.00       | 0.04                      | 0.04                      |

Packaging: 150 pieces per bag.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# RLB Series Radial Lead Inductors



## Electrical Characteristics - RLB0712 Series

NOTE: Temperature rise..... 20 °C max. at rated current

| Bourns Part Number | Inductance (μH) | Q Ref. | Test Freq. (Hz) |         | SRF (MHz) Min. | RDC (Ω) Max. | IDC (mA) Max. |
|--------------------|-----------------|--------|-----------------|---------|----------------|--------------|---------------|
|                    |                 |        | L               | Q       |                |              |               |
| RLB0712-100KL      | 10 ± 10 %       | 20     | 1 K             | 2.520 M | 16.0           | 0.07         | 1100          |
| RLB0712-120KL      | 12 ± 10 %       | 20     | 1 K             | 2.520 M | 12.0           | 0.08         | 1000          |
| RLB0712-150KL      | 15 ± 10 %       | 20     | 1 K             | 2.520 M | 10.0           | 0.09         | 900           |
| RLB0712-180KL      | 18 ± 10 %       | 20     | 1 K             | 2.520 M | 10.0           | 0.10         | 750           |
| RLB0712-220KL      | 22 ± 10 %       | 20     | 1 K             | 2.520 M | 9.0            | 0.12         | 700           |
| RLB0712-270KL      | 27 ± 10 %       | 20     | 1 K             | 2.520 M | 8.0            | 0.13         | 650           |
| RLB0712-330KL      | 33 ± 10 %       | 20     | 1 K             | 2.520 M | 7.0            | 0.15         | 600           |
| RLB0712-390KL      | 39 ± 10 %       | 20     | 1 K             | 2.520 M | 6.0            | 0.16         | 550           |
| RLB0712-470KL      | 47 ± 10 %       | 20     | 1 K             | 2.520 M | 6.0            | 0.18         | 450           |
| RLB0712-560KL      | 56 ± 10 %       | 20     | 1 K             | 2.520 M | 5.0            | 0.21         | 400           |
| RLB0712-680KL      | 68 ± 10 %       | 20     | 1 K             | 2.520 M | 5.0            | 0.24         | 360           |
| RLB0712-820KL      | 82 ± 10 %       | 20     | 1 K             | 2.520 M | 5.0            | 0.35         | 340           |
| RLB0712-101KL      | 100 ± 10 %      | 20     | 1 K             | 0.796 M | 4.0            | 0.40         | 320           |
| RLB0712-121KL      | 120 ± 10 %      | 20     | 1 K             | 0.796 M | 4.0            | 0.45         | 300           |
| RLB0712-151KL      | 150 ± 10 %      | 20     | 1 K             | 0.796 M | 3.5            | 0.50         | 280           |
| RLB0712-181KL      | 180 ± 10 %      | 20     | 1 K             | 0.796 M | 3.0            | 0.75         | 260           |
| RLB0712-221KL      | 220 ± 10 %      | 20     | 1 K             | 0.796 M | 3.0            | 0.90         | 240           |
| RLB0712-271KL      | 270 ± 10 %      | 20     | 1 K             | 0.796 M | 2.5            | 1.00         | 220           |
| RLB0712-331KL      | 330 ± 10 %      | 20     | 1 K             | 0.796 M | 2.5            | 1.10         | 200           |
| RLB0712-391KL      | 390 ± 10 %      | 20     | 1 K             | 0.796 M | 2.0            | 1.20         | 180           |
| RLB0712-471KL      | 470 ± 10 %      | 20     | 1 K             | 0.796 M | 2.0            | 1.50         | 160           |

Packaging: 400 pieces per bag.

## Electrical Characteristics - RLB0912 Series

NOTE: Temperature rise..... 40 °C typ. at rated Irms  
Inductance drop..... 10 % typ at Isat

| Bourns Part Number | Inductance (μH) | Q Ref. | Test Freq. (Hz) |         | SRF (MHz) Min. | RDC (Ω) Max. | Irms (A) Typ. | Isat (A) Typ. |
|--------------------|-----------------|--------|-----------------|---------|----------------|--------------|---------------|---------------|
|                    |                 |        | L               | Q       |                |              |               |               |
| RLB0912-1R0ML      | 1.0 ±20 %       | 30     | 1 K             | 7.960 M | 88.0           | 0.010        | 6             | 8.1           |
| RLB0912-1R5ML      | 1.5 ±20 %       | 30     | 1 K             | 7.960 M | 78.0           | 0.008        | 6             | 8             |
| RLB0912-2R2ML      | 2.2 ±20 %       | 30     | 1 K             | 7.960 M | 63.0           | 0.010        | 5.3           | 7.5           |
| RLB0912-3R3ML      | 3.3 ±20 %       | 30     | 1 K             | 7.960 M | 50.0           | 0.018        | 4.5           | 6.5           |
| RLB0912-4R7ML      | 4.7 ±20 %       | 30     | 1 K             | 7.960 M | 41.0           | 0.022        | 4             | 5             |
| RLB0912-6R8ML      | 6.8 ±20 %       | 30     | 1 K             | 7.960 M | 33.0           | 0.028        | 3.7           | 4.3           |
| RLB0912-100KL      | 10.0 ±10 %      | 60     | 1 K             | 2.520 M | 27.0           | 0.043        | 2.5           | 3.6           |
| RLB0912-150KL      | 15.0 ±10 %      | 50     | 1 K             | 2.520 M | 21.0           | 0.056        | 2.3           | 3             |
| RLB0912-220KL      | 22.0 ±10 %      | 50     | 1 K             | 2.520 M | 17.0           | 0.086        | 2.1           | 2.5           |
| RLB0912-330KL      | 33.0 ±10 %      | 45     | 1 K             | 2.520 M | 13.0           | 0.140        | 1.7           | 2             |
| RLB0912-470KL      | 47.0 ±10 %      | 40     | 1 K             | 2.520 M | 11.0           | 0.170        | 1.5           | 1.7           |
| RLB0912-680KL      | 68.0 ±10 %      | 35     | 1 K             | 2.520 M | 9.0            | 0.280        | 1.35          | 1.5           |
| RLB0912-101KL      | 100.0 ±10 %     | 55     | 1 K             | 0.796 M | 7.2            | 0.330        | 1             | 1.2           |
| RLB0912-151KL      | 150.0 ±10 %     | 40     | 1 K             | 0.796 M | 5.7            | 0.560        | 0.92          | 1             |
| RLB0912-221KL      | 220.0 ±10 %     | 30     | 1 K             | 0.796 M | 4.5            | 0.720        | 0.8           | 0.8           |
| RLB0912-331KL      | 330.0 ±10 %     | 25     | 1 K             | 0.796 M | 3.6            | 1.100        | 0.7           | 0.62          |
| RLB0912-471KL      | 470.0 ±10 %     | 25     | 1 K             | 0.796 M | 2.9            | 1.700        | 0.6           | 0.52          |
| RLB0912-681KL      | 680.0 ±10 %     | 25     | 1 K             | 0.796 M | 2.3            | 2.300        | 0.5           | 0.42          |
| RLB0912-102KL      | 1000.0 ±10 %    | 55     | 1 K             | 0.252 M | 1.9            | 4.300        | 0.4           | 0.35          |

Packaging: 200 pieces per bag; available in ammo-pak (use Model RLH0912) - 1000 pieces per box.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# RLB Series Radial Lead Inductors



## Electrical Characteristics - RLB0914 Series

NOTE: Temperature rise..... 40 °C typ. at rated I<sub>rms</sub>  
 Inductance drop..... 10 % typ at I<sub>sat</sub>

| Bourns Part Number | Inductance (μH) | Q Ref. | Test Freq. (MHz) L, Q | SRF (MHz) Min. | RDC (Ω) Max. | I <sub>rms</sub> (A) Typ. | I <sub>sat</sub> (A) Typ. |
|--------------------|-----------------|--------|-----------------------|----------------|--------------|---------------------------|---------------------------|
| RLB0914-3R3ML      | 3.3 ± 20 %      | 20     | 7.960                 | 70.0           | 0.027        | 3.6                       | 11.3                      |
| RLB0914-4R7ML      | 4.7 ± 20 %      | 20     | 7.960                 | 50.0           | 0.033        | 3.2                       | 10                        |
| RLB0914-6R8ML      | 6.8 ± 20 %      | 20     | 7.960                 | 30.0           | 0.039        | 3                         | 8.5                       |
| RLB0914-100KL      | 10.0 ± 10 %     | 50     | 2.520                 | 20.0           | 0.048        | 2.7                       | 6.7                       |
| RLB0914-120KL      | 12.0 ± 10 %     | 50     | 2.520                 | 15.0           | 0.055        | 2.5                       | 6.2                       |
| RLB0914-150KL      | 15.0 ± 10 %     | 50     | 2.520                 | 10.0           | 0.060        | 2.4                       | 5.3                       |
| RLB0914-180KL      | 18.0 ± 10 %     | 40     | 2.520                 | 9.5            | 0.065        | 2.3                       | 5                         |
| RLB0914-220KL      | 22.0 ± 10 %     | 40     | 2.520                 | 9.0            | 0.090        | 1.9                       | 4.5                       |
| RLB0914-270KL      | 27.0 ± 10 %     | 40     | 2.520                 | 8.5            | 0.110        | 1.8                       | 4                         |
| RLB0914-330KL      | 33.0 ± 10 %     | 40     | 2.520                 | 8.0            | 0.120        | 1.7                       | 3.8                       |
| RLB0914-390KL      | 39.0 ± 10 %     | 30     | 2.520                 | 7.0            | 0.130        | 1.6                       | 3.4                       |
| RLB0914-470KL      | 47.0 ± 10 %     | 30     | 2.520                 | 6.0            | 0.140        | 1.56                      | 3.2                       |
| RLB0914-560KL      | 56.0 ± 10 %     | 30     | 2.520                 | 5.0            | 0.200        | 1.5                       | 3                         |
| RLB0914-680KL      | 68.0 ± 10 %     | 30     | 2.520                 | 4.5            | 0.210        | 1.33                      | 2.7                       |
| RLB0914-820KL      | 82.0 ± 10 %     | 30     | 2.520                 | 4.0            | 0.230        | 1.28                      | 2.5                       |
| RLB0914-101KL      | 100.0 ± 10 %    | 30     | 0.796                 | 3.5            | 0.280        | 1.1                       | 2.1                       |
| RLB0914-121KL      | 120.0 ± 10 %    | 30     | 0.796                 | 3.0            | 0.320        | 1.05                      | 1.9                       |
| RLB0914-151KL      | 150.0 ± 10 %    | 30     | 0.796                 | 2.8            | 0.370        | 1                         | 1.8                       |
| RLB0914-181KL      | 180.0 ± 10 %    | 30     | 0.796                 | 2.6            | 0.540        | 0.87                      | 1.63                      |
| RLB0914-221KL      | 220.0 ± 10 %    | 20     | 0.796                 | 2.4            | 0.600        | 0.8                       | 1.5                       |
| RLB0914-271KL      | 270.0 ± 10 %    | 20     | 0.796                 | 2.2            | 0.680        | 0.77                      | 1.4                       |
| RLB0914-331KL      | 330.0 ± 10 %    | 20     | 0.796                 | 2.0            | 0.760        | 0.74                      | 1.25                      |
| RLB0914-391KL      | 390.0 ± 10 %    | 20     | 0.796                 | 1.9            | 0.850        | 0.7                       | 1.15                      |
| RLB0914-471KL      | 470.0 ± 10 %    | 20     | 0.796                 | 1.8            | 1.300        | 0.56                      | 1                         |
| RLB0914-561KL      | 560.0 ± 10 %    | 20     | 0.796                 | 1.7            | 1.400        | 0.52                      | 0.95                      |
| RLB0914-681KL      | 680.0 ± 10 %    | 20     | 0.796                 | 1.6            | 1.600        | 0.49                      | 0.9                       |
| RLB0914-821KL      | 820.0 ± 10 %    | 20     | 0.796                 | 1.5            | 1.800        | 0.46                      | 0.83                      |
| RLB0914-102KL      | 1000.0 ± 10 %   | 40     | 0.252                 | 1.3            | 2.100        | 0.42                      | 0.65                      |

Packaging: 200 pieces per bag

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Users should verify actual device performance in their specific applications.

# RLB Series Radial Lead Inductors



## Electrical Characteristics - RLB1314 Series

NOTE: Temperature rise..... 20 °C max. at rated current

| Bourns Part Number | Inductance (μH) | Q Ref. | Test Freq. (Hz) |        | SRF (MHz) Min. | RDC (Ω) Max. | IDC (A) Max. | Dimensions                             |                                       |
|--------------------|-----------------|--------|-----------------|--------|----------------|--------------|--------------|--|---------------------------------------|
|                    |                 |        | L               | Q      |                |              |              | W Dia.                                 | F                                     |
| RLB1314-3R3ML      | 3.3 ± 20 %      | 90     | 1 K             | 7.96 M | 59.00          | 0.008        | 5.600        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-4R7ML      | 4.7 ± 20 %      | 100    | 1 K             | 7.96 M | 45.00          | 0.009        | 4.700        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-6R8ML      | 6.8 ± 20 %      | 80     | 1 K             | 7.96 M | 34.00          | 0.012        | 3.900        | $\frac{0.7 \pm 0.05}{(.028 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-100ML      | 10.0 ± 20 %     | 140    | 1 K             | 2.52 M | 26.00          | 0.015        | 3.200        | $\frac{0.7 \pm 0.05}{(.028 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-150ML      | 15.0 ± 20 %     | 120    | 1 K             | 2.52 M | 19.00          | 0.019        | 2.600        | $\frac{0.7 \pm 0.05}{(.028 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-220KL      | 22.0 ± 10 %     | 110    | 1 K             | 2.52 M | 14.00          | 0.026        | 2.200        | $\frac{0.7 \pm 0.05}{(.028 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-330KL      | 33.0 ± 10 %     | 100    | 1 K             | 2.52 M | 10.00          | 0.045        | 1.800        | $\frac{0.6 \pm 0.05}{(.024 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-470KL      | 47.0 ± 10 %     | 90     | 1 K             | 2.52 M | 8.30           | 0.056        | 1.500        | $\frac{0.6 \pm 0.05}{(.024 \pm .002)}$ | $\frac{9.0 \pm 1.0}{(.354 \pm .04)}$  |
| RLB1314-680KL      | 68.0 ± 10 %     | 80     | 1 K             | 2.52 M | 6.70           | 0.092        | 1.200        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-101KL      | 100.0 ± 10 %    | 70     | 1 K             | 796 K  | 5.40           | 0.120        | 1.000        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-151KL      | 150.0 ± 10 %    | 70     | 1 K             | 796 K  | 4.30           | 0.200        | 0.820        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-221KL      | 220.0 ± 10 %    | 40     | 1 K             | 796 K  | 3.40           | 0.250        | 0.680        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-331KL      | 330.0 ± 10 %    | 40     | 1 K             | 796 K  | 2.70           | 0.420        | 0.550        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-471KL      | 470.0 ± 10 %    | 30     | 1 K             | 796 K  | 2.30           | 0.510        | 0.460        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-681KL      | 680.0 ± 10 %    | 30     | 1 K             | 796 K  | 1.90           | 0.790        | 0.380        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-102KL      | 1000.0 ± 10 %   | 40     | 1 K             | 252 K  | 1.60           | 1.300        | 0.310        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-152KL      | 1500.0 ± 10 %   | 30     | 1 K             | 252 K  | 1.30           | 1.700        | 0.250        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-222KL      | 2200.0 ± 10 %   | 60     | 1 K             | 252 K  | 1.10           | 2.900        | 0.210        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-332KL      | 3300.0 ± 10 %   | 50     | 1 K             | 252 K  | 0.90           | 3.700        | 0.170        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-472KL      | 4700.0 ± 10 %   | 50     | 1 K             | 252 K  | 0.76           | 5.600        | 0.140        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-682KL      | 6800.0 ± 10 %   | 60     | 1 K             | 252 K  | 0.65           | 9.400        | 0.120        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-103KL      | 10000.0 ± 10 %  | 80     | 1 K             | 79.6 K | 0.53           | 12.000       | 0.100        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |
| RLB1314-153KL      | 15000.0 ± 10 %  | 70     | 1 K             | 79.6 K | 0.41           | 15.000       | 0.082        | $\frac{0.8 \pm 0.05}{(.032 \pm .002)}$ | $\frac{7.0 \pm 0.8}{(.276 \pm .032)}$ |

DIMENSIONS:  $\frac{MM}{(INCHES)}$

Packaging: RLB1314 (3R3M to 470K) = 150 pieces per bag; RLB1314 (680K to 153K) = 130 pieces per bag.

REV. 03/17

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.