



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Core **RM8/I**

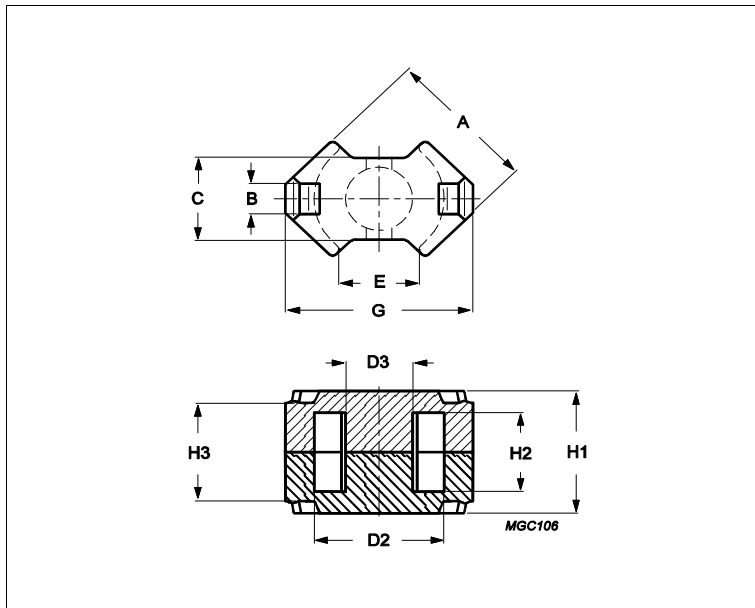

Effective parameters			
	Parameter	Value	Unit
$\Sigma(I/A)$	core factor (C1)	0.604	mm ⁻¹
Ve	effective volume	2440	mm ³
Le	effective length	38.4	mm
Ae	effective area	63	mm ²
Amin	minimum area	55.4	mm ²
m	RM8/I	≈ 13	g/set

Dimensions for product: RM8/I

	Nom	Tol +	Tol -	Max	Min	Unit
A	19.70	0.00	0.80	19.70	18.90	mm
B	5.10	0.10	0.10	5.20	5.00	mm
C	11.00	0.00	0.50	11.00	10.50	mm
D2	17.00	0.60	0.00	17.60	17.00	mm
D3	8.55	0.00	0.30	8.55	8.25	mm
E					9.50	mm
G	23.20	0.00	0.90	23.20	22.30	mm
H1	16.40	0.10	0.10	16.50	16.30	mm
H2	10.80	0.40	0.00	11.20	10.80	mm
H3	14.30	0.25	0.25	14.55	14.05	mm

Inductance factor

Material	Value	Tol +	Tol -	Unit
3C91	4100	25%	25%	nH/turns ²
3C94	3300	25%	25%	nH/turns ²
3C95	4100	25%	25%	nH/turns ²
3C96	3000	25%	25%	nH/turns ²
3C97	4100	25%	25%	nH/turns ²
3D3	1400	25%	25%	nH/turns ²
3F36	2400	25%	25%	nH/turns ²
3F46	1400	25%	25%	nH/turns ²
3H3	3250	25%	25%	nH/turns ²

Power loss: 3C91

Core **RM8/I**

Measuring conditions			Max	Unit
100 kHz	200 mT	60 °C	1.200	W/set
Power loss: 3C94				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	1.200	W/set
Power loss: 3C95				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	1.200	W/set
100 kHz	200 mT	25 °C	1.300	W/set
Power loss: 3C96				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	1.100	W/set
400 kHz	50 mT	100 °C	0.440	W/set
Power loss: 3C97				
Measuring conditions			Max	Unit
100 kHz	200 mT	60 °C	1.200	W/set
100 kHz	200 mT	120 °C	1.200	W/set
100 kHz	200 mT	140 °C	1.500	W/set
Power loss: 3F36				
Measuring conditions			Max	Unit
500 kHz	50 mT	100 °C	0.370	W/set
500 kHz	100 mT	100 °C	2.800	W/set
Power loss: 3F46				
Measuring conditions			Max	Unit
1000 kHz	50 mT	100 °C	0.980	W/set
3000 kHz	10 mT	100 °C	0.550	W/set

Bsat					
Measuring conditions			Material	Min	Unit
25 kHz	250 A/m	100 °C	3C91	320	mT
25 kHz	250 A/m	100 °C	3C94	320	mT
25 kHz	250 A/m	100 °C	3C95	330	mT
25 kHz	250 A/m	100 °C	3C96	340	mT
25 kHz	250 A/m	100 °C	3C97	330	mT
25 kHz	250 A/m	100 °C	3F36	340	mT
25 kHz	250 A/m	100 °C	3F46	330	mT

Accessories		
Ordering name	Description	Ordering code
CLI/P-RM8/I	Clip, with ground pin	432202134311
CPV-RM8/I-1S-12PD	Coil former, termoplastic, vertical	432202134051
CPV-RM8/I-1S-12PD-TZ	Coil former, termoplastic, vertical	432202106651
CSV-RM8-1S-12P-C	Coil former, termoset, vertical	432202107491
CSV-RM8-1S-12P-G	Coil former, termoset, vertical	432202100841

Core RM8/I

CSV-RM8-1S-4P	Coil former, termoset, vertical	432202134861
CSV-RM8-1S-5P	Coil former, termoset, vertical	432202134661
CSV-RM8-1S-8P-G	Coil former, termoset, vertical	432202101401
CSV-RM8-1S-8PL	Coil former, termoset, vertical	432202134871
CSV-RM8-1S-8P-TA	Coil former, termoset, vertical	432202102651
CSV-RM8-2S-12P	Coil former, termoset, vertical	432202134711
CSV-RM8-2S-8P	Coil former, termoset, vertical	432202134701