



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RNXV Bluetooth / Wi-Fi Module

Provides drop in, certified Bluetooth or Wi-Fi connectivity for existing systems currently using 802.15.4 modules

PRODUCT BRIEF

The RNXV module by Roving Networks provides drop-in, certified Bluetooth or Wi-Fi™ connectivity for existing systems using 802.15.4 modules. Based on the popular 2 x 10 (2mm) socket footprint often found in embedded applications, the RNXV offers a complete wireless solution for customers looking to migrate to a standard protocol without modifying existing hardware.

The RN171XV Wi-Fi module is built upon Roving's RN171 ultra-low power 802.11 b/g technology which boasts a complete onboard TCP/IP stack with a simple UART interface. The onboard stack offers network services including full WEP/WPA/WPA2 security, FTP/HTTP client, UDP, TCP, HTTP, Telnet, DNS, and DHCP and Wi-Fi protected setup (WPS) amongst others. It supports infrastructure networking, AdHoc connectivity, and SoftAP.

The RN41XV and RN42XV modules are built upon Roving's RN41 and RN42 low power Bluetooth modules. The modules have an embedded Bluetooth stack and support multiple interface protocols and profiles including the commonly used SPP and HID profiles. The RN42 and RN41 are functionally compatible with high-performance, onboard antennas and support for Bluetooth EDR.


ORDERING INFORMATION

Module	Technology	Antenna
RN171XVW-I/RM*	Wi-Fi	Wire
RN171XVS-I/RM	Wi-Fi	SMA connector
RN171XVU-I/RM	Wi-Fi	U.FL connector
RN41XVC-I/RM	Bluetooth	Chip
RN41XVU-I/RM*	Bluetooth	U.FL connector
RN42XVP-I/RM*	Bluetooth	PCB trace
RN42XVU-I/RM	Bluetooth	U.FL connector

* Note: modules shown left



RN171XVW

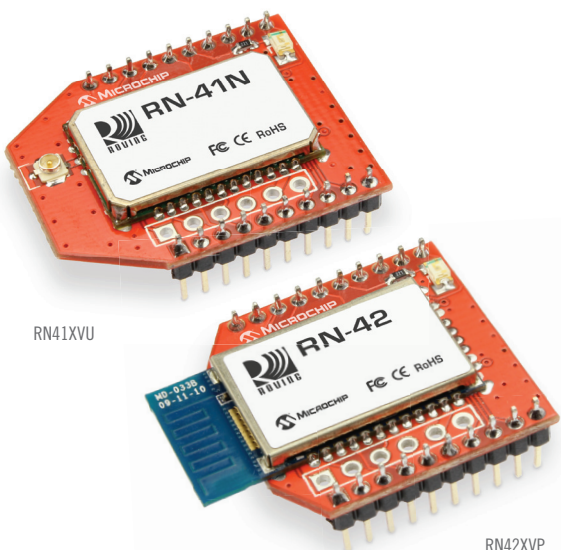

RN42XVP





- Direct internet connectivity
- Full 802.11 b/g data rate support
- Onboard TCP/IP stack
- Infrastructure, AdHoc, and AP modes
- Low power operation
- Industrial temperature range
- Multiple antenna options: wire, U.FL, SMA connector
- FCC, CE, IC, and Wi-Fi certifications
- Firmware over-air upgradeable
- Webserver configurator

SPECIFICATIONS

RF Data Rates	Up to 54Mbps
Range (LoS)	~200m
Transmit Power (Tx)	-2 to +12dBm (programmable)
Sensitivity (Rx)	-83dBm
Serial Data Interface	UART (up to 464Kbps)
Configuration	API, local or remote (over air)
Frequency	2.4GHz
ADC	(8) 14-bit inputs
Digital I/O	3
Antenna options	Wire, SMA, UFL, chip


RN41XV / RN42XV (Bluetooth)




- Fully certified Bluetooth® module, supports version 2.1 + Enhanced Data Rate (EDR)
- Backwards-compatible with Bluetooth version 2.0, 1.2, and 1.1
- Low power:
 - RN41XV: 30 mA connected, < 10 mA sniff mode
 - RN42XV: 26 µA sleep, 3 mA connected, 30 mA transmit
- UART (SPP) data connection interface
- Certifications: FCC, IC, CE, Bluetooth SIG

Bluetooth Versions	2.1 + EDR, 2.0, 1.2, 1.1
Data Rate	With onboard stack: 300Kbps
Frequency Band	2.412 - 2.484 GHz
Modulation Techniques	FHSS/GFSK modulation, 79 channels at 1MHz intervals
Profiles	SPP, DUN, HID, iAP, HCI, RFCOM, L2CAP, SDP
Supply Voltage	3.3V ± 10%
Output Power	RN41: +15dBm; RN42: +4dBm
Power Consumption	Standby/Idle 25 mA : Connected (normal mode) 30 mA Connected (low power Sniff) 8 mA Standby/Idle (Deep sleep enabled) 26 µA (250µA for RN41)
Operating Temperature Range	-40°C to +85°C
Interface	UART, USB, Bluetooth
Antenna Options	RN41: Chip antenna, U.FL connector RN42: PCB trace, U.FL connector
Certifications	FCC, IC, CE, Bluetooth SIG


PIN DIAGRAM




Dimensions in mm

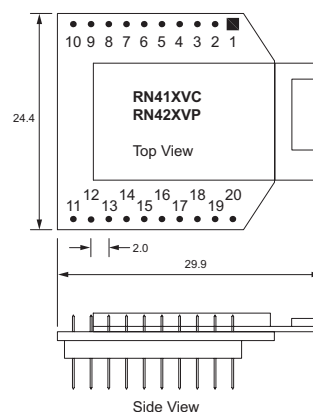

Side View

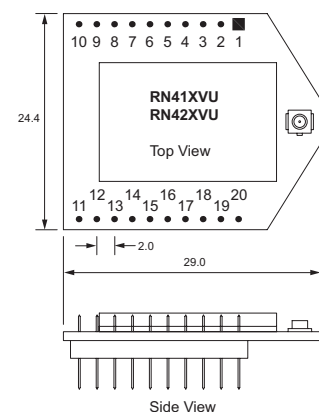

Side View



DEVELOPMENT TOOLS

Roving offers several development tools for both Bluetooth and Wi-Fi RNXV modules such as the RN-XV-EK1, an evaluation kit that connects to a PC via a standard USB cable. It has 2 pushbutton switches and connectors for the RNXV.

Part Number	Descriptions
RN-XV-EK1	RNXV Evaluation kit with UART to USB connector and 802.15.4 socket