



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Features:
- High voltage surge handling per IEC 60065.14.1, up to 7KV
 - High tolerance to prolonged exposure to temperature and humidity stress
 - Ideal for applications requiring high stability, reliability and voltage handling; including power inverters, AC adapters and switching power supplies



Electrical Specifications					
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage ⁽¹⁾	Maximum Overload Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance
					1% and 5%
RNV14	0.25W	1600V (DC)	3200V (DC)	±100 ppm/°C	100K - 6.8M
		1150V (RMS)	2300V (RMS)	±200 ppm/°C	100K - 15M

Note: (1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage


Mechanical Specifications					
Type / Code	L	D	d	H	Unit
RNV14	0.236 ± 0.012	0.094 ± 0.008	0.022 ± 0.002	1.102 ± 0.079	inches
	6.00 ± 0.30	2.40 ± 0.20	0.55 ± 0.05	28.00 ± 2.00	mm

Packaging Specifications						
Type / Code	A max. ⁽¹⁾	B max.	C	D ⁽²⁾	Tape	Unit
RNV14	2.756 ± 0.118	11.811 ± 0.197	0.197 ± 0.020	2.047 ± 0.020	0.250	inches
	70.00 ± 3.00	300.00 ± 5.00	5.00 ± 0.50	52.00 ± 0.50	6.35	mm

Dimension "E": This is a non-critical dimension that does not have a tolerance in the standard.


Range of diameters is from 0.547" (13.9 mm) to 1.5" (38.1 mm)

- (1) Reference value only. The "A" dimension shall be governed by the overall length of the taped component. The distance between flanges shall be 0.59" (1.5 mm) to 0.315" (8 mm) greater than the overall component.
- (2) The given dimension "D" expresses the standard width spacing. A 26 mm narrow spacing is available as option "N" packaging code.

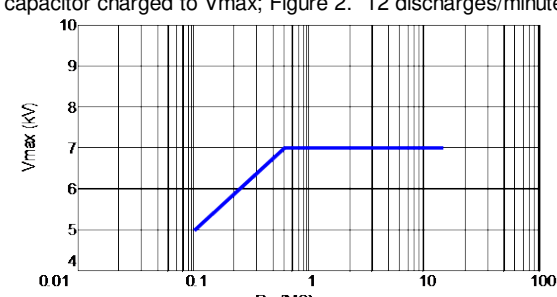
Performance Characteristics		
Item	Performance	Test Method
Solvent Resistance	No serious scratches on the insulating surface	Resistor was dipped into solvent for 5 ± 0.5 minutes
Temperature Coefficient Resistance (TCR)	±100 ppm/°C (100K - 6.8M) ±200 ppm/°C (100K - 15M)	Measured resistance (R ₀ ohm) at room temperature (t °C) then measured again at 100°C higher than room temperature $ppm/°C = (R - R_0) / R_0 \times 10^6 / ((T + 100) - t)$
Overload (short time)	Resistance variation within ±(1% + 0.05Ω)	Applied DC voltage 2.5 times rated voltage or max. overload voltage whichever is lower for 5 seconds ON, 45 seconds OFF. Repeated cycle 10 times. Maximum Overload voltage is not more than 2 x Max Working Voltage
Voltage Proof	Resistance variation within ±(0.5% + 0.05Ω)	Resistor was clamped in the through of a 90°C metallic V-block and was tested at provided AC potential voltage for 1 minute. Test voltage: max overload voltage. Test voltage: 500V (AC)
Vibration	Resistance variation within ±(0.5% + 0.05Ω)	Applied 1.5mm amplitude vibration to two directions, perpendicular to each other, for 6 hours each. Total 12 hours. Vibrating frequency is 10HZ - 2000HZ - 10HZ cycle in 20 minutes. Repeat cycle.
Insulation Resistance	104 MΩ or more	Resistor was clamped in the through of a 90°C metallic V-block at DC 100V for 1 minute
Robustness of Terminations	Resistance variation within ±(0.5% + 0.05Ω) and no mechanical damage	Tensile test: The body of the part is fixed. The tensile force was applied gradually up to 10N. Twist test: Terminal lead was rotated 360° of the original axis of the bent terminal, alternating direction for 3 rotations.
Resistance to Soldering Heat	No mechanical and electrical deterioration	Resistance to wave soldering condition: Temperature/Time-Profile in accordance to the CECC00802. Max Temperature/Time: 260°C, 10 seconds
Solderability	More than 95% of the lead surface was covered by new solder after the leads were dipped in the solder	Dipped the lead into a solder bath (temperature 245°C ± 5°C) up to 4 ± 0.8mm from the resistor body and held for 5 ± 0.5 seconds.
Rapid Change of Temperature	Resistance variation within ±(0.5% + 0.05Ω)	Test: -55°C for 30 minutes, 25°C for 30 seconds, 155°C for 30 minutes, 25°C for 30 seconds. Resistance changed after continuous 5 cycles.
Damp Heat	Resistance variation within ±(1.5% + 0.05Ω)	Temperature 40°C ± 2°C, relative humidity 90~95%, inside bath for 1.5 hour and shut voltage 0.5 hour. Repeated cycle for 1,000 hours. Room temperature for 1 hour after test, then measured
Endurance at 70°C	Resistance variation within ±(1.5% + 0.05Ω)	In constant temperature chamber 70°C ± 2°C, applied rated DC voltage for 1.5 hour and shut voltage for 0.5 hour. Cycle repeated for 1,000 hours.
Cold Resistance	Resistance variation within ±(1.5% + 0.05Ω)	Resistor was put into a bath at fixed temp of -55°C ± 3°C for 2 hours. After measured, left at room temp for 1 hour, then measured again.
Heat Resistance	Resistance variation within ±(1.5% + 0.05Ω)	Resistor was put into a bath at fixed temp of 155°C ± 3°C for 16 hours. After measured, left at room temp for 1 hour, then measured again.
High Voltage Surge Test	Resistance variation within ±(1% + 0.05Ω)	In accordance with IEC60065.14.1, 50 discharges from a 1nF capacitor charged to V _{max} ; Figure 2. 12 discharges/minute 

Operating Temperature Range: -55°C to +155°C

Power Derating Curve:

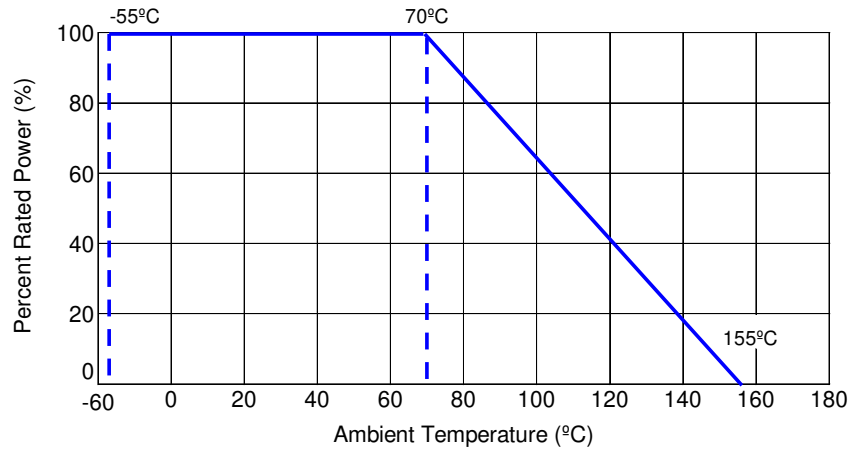

How to Order



Product Series		Size	Power	Tolerance		Packaging				TCR		Resistance Value
Code	Description			Code	Tol	Code	Description	Size	Quantity	Code	ppm	
RNV	High Voltage Metal Film	14	0.25W	F	1%	A	Tape Box (52mm)	14	2,000	D	100	Four characters with the multiplier used as the decimal holder. 100 Kohm = 100K 1 Mohm = 1M00 15 Mohm = 15M0
				J	5%	T	Tape and Reel		5,000	L	200	