



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Smooth Belt - 1/8"D (10" ID)

ROB-12106

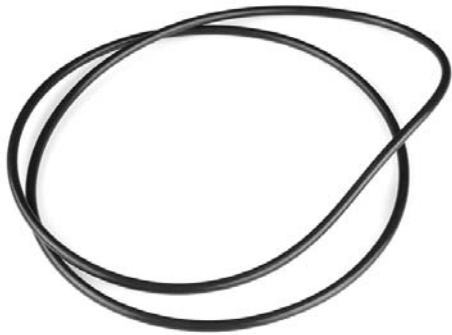

© images are CC BY-NC-SA 3.0

Description: These smooth (round) belts have a Durometer hardness of A70 and can withstand temperatures from -35 to 250 degrees F. Their elastic nature allows them to apply tension on the pulleys when stretched and the rubber construction creates excellent grip characteristics between the pulley and belt. Smooth belts can be used in a variety of applications including follow focus systems, linear drives, 90 degree drives, XY tables, robot tracks, battery hold-downs, etc.

Actobotics is a robotics building system based around extruded aluminum channels, gears, precision shafts, and ball bearings. Thanks to the two standardized hole patterns, nearly all Actobotics components can be intuitively connected together. The wide range of components makes building complex electromechanical prototypes or finished projects a reality.

Note: These belts have a stretch factor of 12-26%. A low stretch factor will apply a small amount of side-load to the axles and create less friction while a higher selected stretch factor will apply slightly more side-load to the axles and have more resistance to belt deflection.