

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# G Series

# SD Memory Card, Industrial MLC Model

#### ■ Product Outline

G series are SDHC memory cards adopting built-in industrial type MLC NAND flash memory and are suitable for industrial applications where large data storage and high speed writes are required. They are adequate for the applications, where large data load are written, such as Broadcast Equipment, Security Camera, Car Navigation Systems and Drive Recorders. They are formatted complying with SD card specification.

■ **Product Specification** (specifications and appearances may be changed without notice.)

representation (openious) and appear		16GB	32GB
Appearance Part Number		Panasonic © 101 16GB MLC  RP-SDGD16DA2	Panasonic  © 32GB  MILE  RP-SDGD32DA2
Capacity	Available user data area capacity *1)	16,198,369,280 byte	31,629,213,696 byte
Memory	Flash Memory Type	MLC 64Gbit x2	MLC 64Gbit x4
Compliant Specification	SD Physical Specification	Ver. 3.01	
	SD Speed Class	CLASS(I)	
	UHS Speed Grade	1)	
	Speed mode	Default Speed, High Speed, SDR12, SDR25, SDR50	
Absolute Maximum Ratings *2)	Supply Voltage	Min: -0.3 V; Max: +4.6 V	
	Input Voltage	Min∶-0.3 V; Max∶VDD +0.3 V	
	Output Voltage	Min: -0.3 V; Max: VDD +0.3 V	
	Output Current	Min∶-24 mA;Max∶+24 mA	
Environmental Specification	Operating Temperature	-40 °C to +85 °C	
	Storage Temperature	-40 °C to +85 °C	
	Humidity	5 % RH to 95 % RH	
	Vibration	15 Gp-р	
	Shock	1,000 G	
	Mating Cycles	10,000 cycles	


<sup>\*1)</sup> Free area capacity after formatted.

- Absolute Maximum Ratings are the values of limitation, which do not damage the card. Those values do not define the operational range.
- Products comply with EU RoHS directives.

<sup>\*2)</sup> Absolute Maximum Ratings are the values of limitation, which do not damage the card. So those values do not define the operational range.

Panasonic RP-SDGDxxDA2

### ■Laser Mark on the Back-side (example; 32GB)

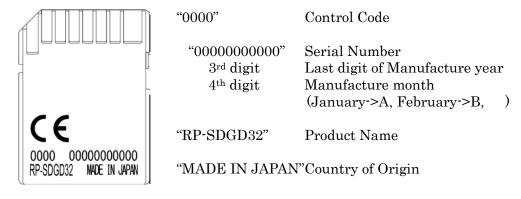

## ■ System Reliability

- a. Powerful error detect and corrective function
- b. Static wear leveling
- c. Data recovery at power failure in writing
- d. Automatic refresh function to prevent uncorrectable error
- e. Bad block management

#### ■ Notice and Caution

If you think about the usage for which special quality or reliability of the products is needed and failure or malfunction of the products may directly threaten life or injury for the special usage (aeronautic or cosmic usage, military usage, combustion machine, life support applications or safety applications), please counsel with our contacts in advance.

Write frequency and storage temperature will affect data retention time. Please make a backup for important data.

### **■** Warranty

If the product cannot be used because of failure which is determined as defect in design or production of the product, it is replaced by same product or equivalent one within 12 months from the delivery date of product.