

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







REVISION D TABLE 1 "B" PART NUMBER 17.00 [.67] RPCE-XX-X-XX.XX-D-C5E RPCE-XX-X-XX.XX-BC-C5E 3.50 [.14]

DO NOT

SCALE FROM

THIS PRINT

NOTES:

DESIGNED & DIMENSIONED IN MILLIMETERS[INCHES]

RPCE-XX-X-XX.XX-XX-C5E CABLE STYLE -01: OUTDOOR UL PLATING SPECIFICATION -E: .000050" GOLD ON CONTACT AREAS, NICKEL ON SHELLS


END OPTION -D: DOUBLE ENDED -BC: BLUNT CUT (SEE FIG. 2, SHEET 2)

CABLE LENGTH* -XX.XX (0.17M[6.69] MIN - 50.00M[1968.50] MAX)


* -00.25 AND -00.50 ARE CATALOG STANDARD LENGTHS, FOR OTHER


LENGTHS CONTACT SAMTEC THIS PRODUCT MANUFACTURED (PK WITH LEAD-FREE PROCESSING

11.68 [.460] REF



D DETAIL 'E' SCALE 15 : 1



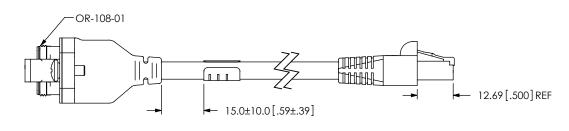




FIG. 1 RPCE-01-E-XX.XX-D-C5E SHOWN

 $\langle \mathbb{C} \rangle$

SEE NOTE 4

SEE NOTE 2

SPE-01

MS-632-375-P-P-S

(SEE NOTE 17)

ASSEMBLY LENGTH: XX.XX + "B"

(SEE TABLE 1) (SEE NOTES 7 & 12)

CABLE LENGTH: XX.XX ± 2%

LABEL-ET

1. (C) REPRESENTS A CRITICAL DIMENSION. 2. SAMTEC LOGO SHALL APPEAR AT ONE EQUALLY SPACED LOCATION ON

SURFACE SHOWN, APPROXIMATELY 16.5[.724] x 5.0[.197].

3. MOLDED SURFACES SHALL BE CONSISTENT AND SMOOTH, SURFACES TO BE FREE OF SCRATCHES. NICKS, SINK AREAS, VOIDS, OR OTHER BLEMISHES.

46.10[1.815] REF

OR-107-01

4. ALL MULTIPLE CAVITY MOLDS SHALL IDENTIFY EACH CAVITY WITH A NUMBER DESIGNATION LOCATED WHERE SHOWN.

5. ALL IDENTIFICATION MARKS SHALL NOT STAND GREATER THAN 0.05[.002] OFF THE SURFACE OF THE PART.

6. MOLD TO BE INSERTED TO ACCEPT DIFFERENT CABLE DIAMETERS.
© 7. ASSEMBLY TO BE 100% ELECTRICALLY TESTED TO CAT5CH USING FLUKE DTX-1800 CABLE ANALYZER. AFTER FINAL ELECTRICAL TEST, LABEL WITH 1 LABEL-ET.

8. ALL EJECTION PIN AND GATE LOCATIONS MUST BE APPROVED BY SAMTEC PRODUCT ENGINEERING. 9. ANY ADDITIONAL VOIDING AND/OR MODIFICATIONS TO VOIDING MUST BE APPROVED BY

SAMTEC PRODUCT ENGINEERING. 10. ALL DRAFT MUST BE WITHIN THE SPECIFIED TOLERANCES.

11. ALL INSIDE/OUTSIDE RADII 0.13[.005] MAX UNLESS OTHERWISE STATED.

12. TOLERANCE SHALL BE ±2% FOR ALL LENGTHS.
13. PANEL THICKNESS: 0.08[.030] - 3.96[.156], RECOMMENDED PANEL CUT OUT ON SHEET 3.

14. BURR ALLOWANCE: 0.038[.0015] MAX. 15. MINIMUM PUSHOUT FORCE: 4.4N[1.00 LB]

ASSEMBLY TO BE BULK PACKAGED.

17. SEALING O-RING IS INCLUDED WITH MS-632-375-P-P-S. 18. REQUIRED TORQUE ON MS-632-375-P-P-S: .32 ± .07 Nm [45 ± 10 IN-OZ].

19. OR-108-XX POSITION INDICATOR

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES ARE: DECIMALS **ANGLES** 2° X.X: ±0.3 [.01] X.XX: ±0.13 [.005] X.XXX: ±0.051 [.0020]

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC

PROPRIETARY NOTE

DO NOT SCALE DRAWING

MATERIAL: MALERIAL:
INSULATOR: GLASS FILLED THEMOPLASTIC
CONTACT: PHOS BRONZE
SHIELD PHOS BRONZE

OVERMOLD: RITE FLEX 640F SEAL: NBR NUT: STAINLESS STEEL SCREW: STAINLESS STEEL O-RING: SILICONE
F:\DWG\MISC\MKTG\RPCE-XX-X-XX.XX-XX-C5E-MKT.SLDDRW

SHEET SCALE: 3:4

SEAL RECTANGULAR RECEPTACLE, ETHERNET

520 PARK EAST BLVD, NEW ALBANY, IN 47150


FAX: 812-948-5047


PHONE: 812-944-6733

e-Mail info@SAMTEC.com

RPCE-XX-X-XX.XX-XX-C5E

BY: T NEWTON 12/10/2009 | SHEET 1 OF 6

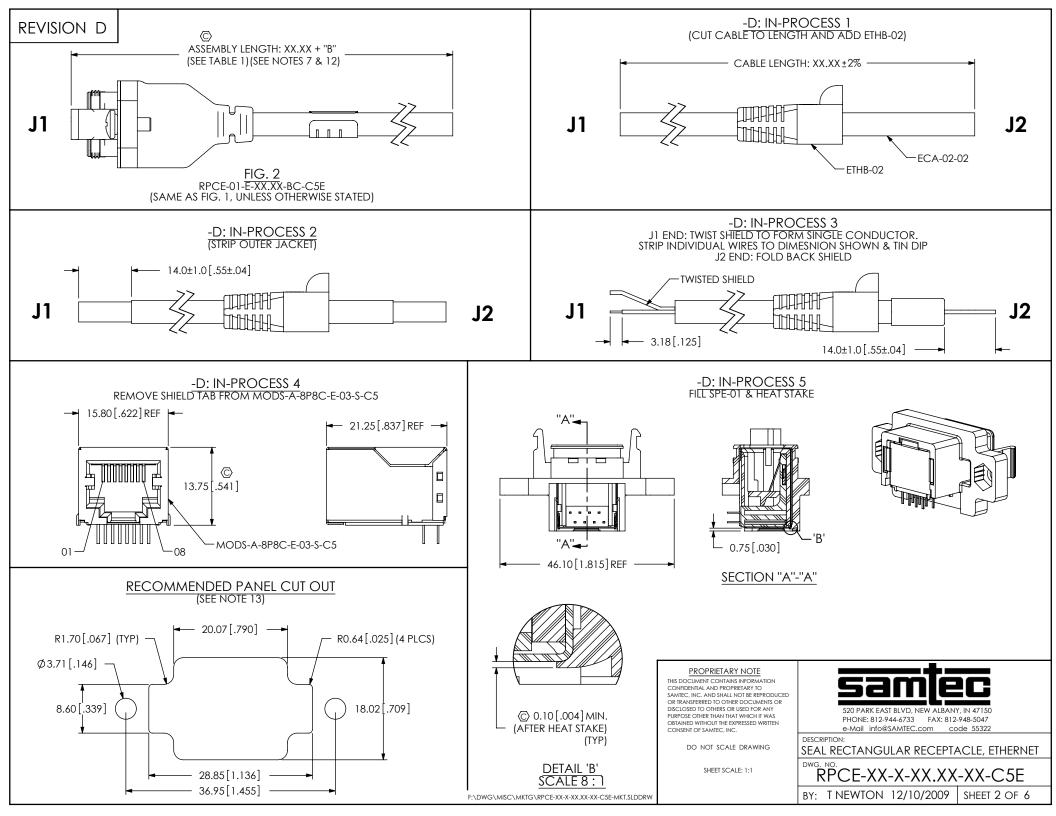

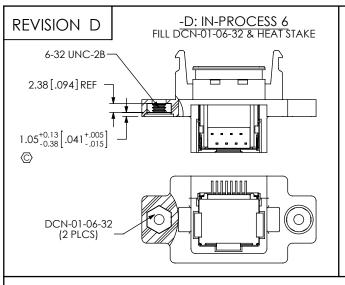




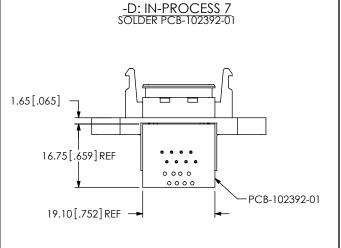


TABLE 2		
J1 P0S	COLOR	J2 POS
01	WHITE/ORANGE	01
02	ORANGE	02
03	WHITE/GREEN	03
04	BLUE	04
05	WHITE/BLUE	05
06	GREEN	06
07	WHITE/BROWN	07
08	BROWN	80
SHELL	BRAID	SHELL

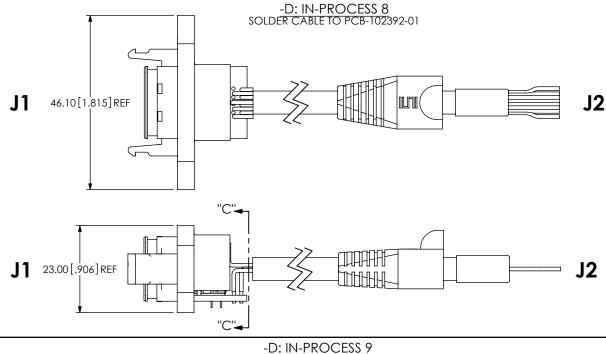



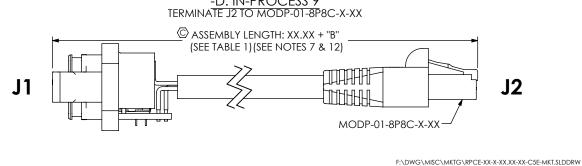

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

SEAL RECTANGULAR RECEPTACLE, ETHERNET

RPCE-XX-X-XX.XX-XX-C5E

BY: T NEWTON 12/10/2009 | SHEET 3 OF 6

