

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Photointerrupter, Ultraminiature SMD type

Absolute maximum ratings (Ta=25°C)

		• ,		
	Parameter	Symbol	Limits	Unit
Input (LED)	Forward current	lF	50	mA
	Reverse voltage	VR	5	V
	Power dissipation	Po	80	mW
Output (photo- transistor)	Collector-emitter voltage	Vceo	30	V
	Emitter-collector voltage	Veco	4.5	٧
	Collector current	lc	30	mA
	Collector power dissipation	Pc	80	mW
Operating temperature		Topr	-30 to +85	°C
	Storage temperature	Tstg	-40 to +85	°C

Applications

DSC(Digital steal camera) DVC(Digital video camera) Digital handy phone

Features

1) Ultraminiature middle size SMD type. 2) Gap 1.2mm.

Electrical and optical characteristics (Ta=25°C)

Parameter			Symbol	Min.	Тур.	Max.	Unit	Conditions
Input charac- teristics	Forward voltage		VF	-	1.8	2.3	٧	I=50mA
	Reverse current		la	-	-	10	μА	V _R =5V
Output charac- teristics	Dark current		Iceo	-	-	0.1	μА	VcE=10V
	Peak sensitivity wavelength		λp	-	800	-	nm	-
Transfer characteristics	Collector current		lc	0.1	-	-	mA	Vce=5V, Ir=5mA
	Collector-emitter saturation voltage		VCE(sat)	-	-	0.4	٧	Ir=20mA, Ic=0.1mA
	Response time	Rise time	tr	-	30	150	μs	Vcc=5V, Ir=0.1mA, Rι=1000Ω
		Fall time	tf	-	30	150	μs	
Infrared light emitter diode	Peak light emitting wavelength		λρ	-	850	-	nm	I⊱=50mA ∗ Non-coherent Infrared light emitting diode used.
Photo transistor	Response time		tr∙tf	-	50	-	μs	$\label{eq:Vcc=5V} Vcc=5V,\ lc=0.1 mA,\ R\iota=1000\Omega$ * This product is not designed to be protected against electromagnetic wave.
	Maximum sensitivity wavelength		λp	-	800	-	nm	-

Electrical and optical characteristics curves




Fig.4 Relative output current vs. distance (II)




Fig.1 Relative output current vs. distance (I)




Fig.2 Forward current falloff




Fig.5 Power dissipation / collector power dissipation vs. ambient temperature




Fig.3 Forward current vs. forward voltage


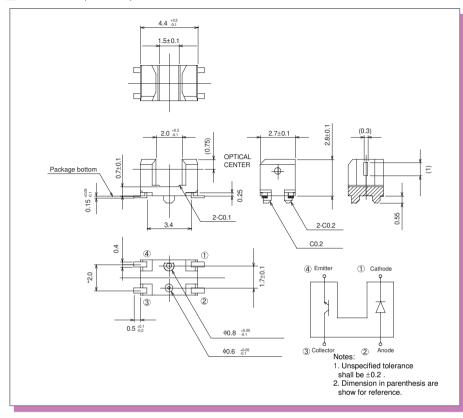



Fig.6 Relative output vs. ambient temperature

Dimensions (Unit : mm)








Fig.10 Output characteristics




Fig.8 Response time vs. collector current





Fig.9 Dark current vs. ambient temperature



- td : Delay time
- tr :Rise time (time for output current to rise from 10% to 90% of peak current)
- tr : Fall time (time for output current to fall from 90% to 10% of peak current)

Fig.11 Response time measurement circuit

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
 means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
 use and operation. Please pay careful attention to the peripheral conditions when designing circuits
 and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@ rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

n TEL:+81-75-311-2121 FAX:+81-75-315-0172

