



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Power Supplies




Redundant Power Supplies



Model Name	RPS-300ATX-ZE	RPS-400ATX-ZE	1757001757 1757001760	1757001758 1757001761	1757001759 1757001677
Wattage	300 W	400 W	460 W	570 W 2+1	810 W 3+1
Input Range	100 ~ 240 V _{AC} 60 ~ 50 Hz 6 ~ 3 A	100 ~ 240 V _{AC} 47 ~ 63 Hz 8 ~ 4 A	100 ~ 240 V _{AC} 47 ~ 63 Hz 8 ~ 4 A	115 ~ 230 V _{AC} 60 ~ 50 Hz 12 ~ 6 A	115 ~ 230 V _{AC} 60 ~ 50 Hz 15 ~ 7.5 A
Outputs	+5 V @ 25 A (3 A min) +3.3 V @ 18 A (1 A min) +12 V @ 16 A (2 A min) -12 V @ 0.5 A, -5 V @ 0.5 A +5 Vsb @ 2 A	+5 V @ 35 A (3 A min) +3.3 V @ 25 A (1 A min) +12 V @ 28 A (2 A min) -12 V @ 1.2 A, -5 V @ 0.5 A +5 Vsb @ 2 A	+5 V @ 40 A (5 A min) +3.3 V @ 30 A (1 A min) +12 V @ 32 A (2.5 A min) -12 V @ 1 A, -5 V @ 0.8 A +5 Vsb @ 2 A	+5 V @ 50 A (6 A min) +3.3 V @ 40 A (2 A min) +12 V @ 34 A (3 A min) -12 V @ 1 A, -5 V @ 1 A +5 Vsb @ 1.2 A	+5 V @ 75 A (9 A min) +3.3 V @ 60 A (3 A min) +12 V @ 51 A (4.5 A min) -12 V @ 1.5 A, -5 V @ 1.5 A +5 Vsb @ 1.6 A
MTBF (hrs)	100,000 @ 25C	100,000 @ 25C	100,000 @ 25C	100,000 @ 25C	100,000 @ 25C
Dimensions (H x W x D)	86 x 150 x 185 mm (3.39" x 5.91" x 7.28")	86 x 150 x 185 mm (3.39" x 5.91" x 7.28")	1757001757: 106 x 354 x 185.8 mm (4.17" x 13.94" x 7.31") 1757001760: 183 x 167 x 187.8 mm (7.20" x 6.57" x 7.39")	1757001758: 95 x 356 x 230 mm (3.74" x 14.02" x 9.06") 1757001761: 200.6 x 164 x 230 mm (7.90" x 6.46" x 9.06")	1757001758: 95 x 356 x 230 mm (3.74" x 14.02" x 9.06") 1757001677: 200.6 x 164 x 230 mm (7.90" x 6.46" x 9.06")
Safety	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC
Compatible Chassis	ACP-2000, ACP-4000, ACP-4010, ACP-4320, IPC-610, IPC-611, IPC-6908, IPC-7220, IPC-7143	ACP-4000, ACP-4010, ACP-4320, ACP-4360, IPC-610, IPC-611, IPC-6908, IPC-7220, IPC-7143	1757001757: ACP-7360, IPC-622 1757001760: ACP-5360, IPC-623	1757001758: ACP-7360 1757001761: ACP-5360, IPC-623	1757001759: ACP-7360 1757001677: ACP-5360, IPC-623
Single Power Module P/N	1757930060G	1757000227G	1757946008G: ACP-7360, IPC-622 1757000228G: ACP-5360, IPC-623	1757930057G: ACP-7360 1757000126G: ACP-5360, IPC-623	1757930057G: ACP-7360 1757000126G: ACP-5360, IPC-623

80 Plus Bronze Power Supply

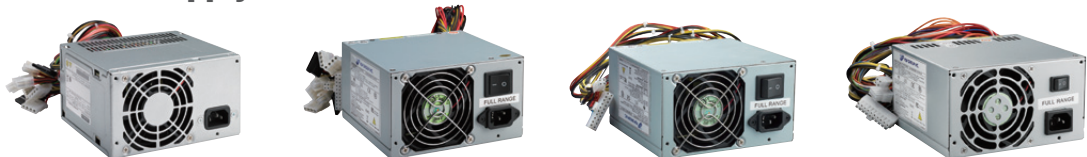

Model Name	PS8-300ATX-ZBE	PS8-400ATX-ZE	PS8-500ATX-ZE	PS8-700ATX-ZE
Wattage	300 W	400 W	500 W	700 W
Input Range	100 ~ 240 V _{AC} 47 ~ 63 Hz 8 ~ 4 A	100 ~ 240 V _{AC} 60 ~ 50 Hz 8 ~ 4 A	100 ~ 240 V _{AC} 60 ~ 50 Hz 8 ~ 4 A	100 ~ 240 V _{AC} 60 ~ 50 Hz 12 ~ 6 A
Outputs	+3.3 V @ 16 A, +5 V @ 19 A +12 V @ 11 A, +12 V _{cpu} @ 11.5 A -12 V @ 0.3 A -5 V @ 0.3 A, +5 Vsb @ 2 A	+3.3 V @ 21 A, +5 V @ 20 A +12 V1 @ 16 A, +12 V2 @ 16 A -12 V @ 0.5 A -5 V @ 0.3 A, +5 Vsb @ 3 A	+3.3 V @ 24 A, +5 V @ 20 A +12 V1 @ 16 A, +12 V2 @ 16 A -12 V @ 0.5 A -5 V @ 0.3 A, +5 Vsb @ 3 A	+3.3 V @ 24 A, +5 V @ 30 A +12 V1 @ 16 A, +12 V2 @ 16 A +12 V3 @ 16 A, +12 V4 @ 16 A -12 V @ 0.5 A -5 V @ 0.5 A, +5 Vsb @ 4 A
MTBF (hrs)	100,000 @ 25° C	100,000 @ 25° C	100,000 @ 25° C	100,000 @ 25° C
Dimensions (H x W x D)	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")
Safety	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC
Compatible Chassis	IPC-602, IPC-510, IPC-610, IPC-611, IPC-619(S) ACP-2000, ACP-4000, ACP-4010, ACP-4320, ACP-4360 IPC-6606, IPC-6608, IPC-5122 IPC-7130, IPC-7132	IPC-602, IPC-510, IPC-610, IPC-611, IPC-619(S) ACP-2000, ACP-4000, ACP-4010, ACP-4320, ACP-4360 IPC-6606, IPC-6608, IPC-5122 IPC-7130, IPC-7132	IPC-610, IPC-611, ACP-4000, ACP-4010, ACP-4320, ACP-4360	IPC-610, IPC-611, ACP-4000, ACP-4010, ACP-4320, ACP-4360

Power Supplies

PS/2 Power Supplies



Model Name	PS-250ATX-ZE	PS-300ATX-DC48E
Wattage	250 W	300 W
Input Range	Selectable 115 V _{AC} / 230 V _{AC} , 60 / 50 Hz, 10 / 5 A	72 ~ 36 V _{DC} , 15 A
Outputs	+5 V @ 27 A (0.5 A min) +3.3 V @ 20 A (0.3 A min) +12 V @ 13 A (1 A min) -12 V @ 0.8 A, -5 V @ 0.3 A, +5 Vsb @ 2 A	+5 V @ 30 A (0.3 A min) +3.3 V @ 28 A (0.3 A min) +12 V @ 15 A (0.2 A min) -12 V @ 0.8 A, -5 V @ 0.3 A, +5 Vsb @ 2 A
MTBF (hrs)	100,000 @ 25C	100,000 @ 25C
Dimensions (H x W x D)	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")
Safety	UL, TUV, CB, CCC	UL, TUV, CB, CCC
Compatible Chassis	ACP-2000, IPC-602, IPC-610, IPC-611, IPC-6606, IPC-6608, IPC-6908	ACP-2000, ACP-4000, ACP-4320, ACP-4360, IPC-602, IPC-610, ACP-4010, IPC-6606, IPC-6608, IPC-6908, IPC-7143, IPC-7220

Power Adapters



Model Name	1757003062 1757003063	1757003527
Wattage	60 W	90 W
Input Range	AC 100 ~ 240 V, 50 ~ 60 Hz, 1.5 A	AC 100 ~ 240 V, 50 ~ 60 Hz, 1.5 A
Outputs	+12 V @ 5.0 A	+19 V @ 4.74 A
Power Plug	1757003062: Drum; 1757003063: 4-pin 12V	Phoenix 2-pin
MTBF (hrs)	1757003062: 60,000 @ 25C; 1757003063: 50,000 @ 25C	50,000 @ 25C
Dimensions	31.5 x 63 x 110 mm	32.0 x 58.0 x 160.0 mm
Safety	UL, TUV, CB, CCC	UL, TUV, CB, CCC
Compatible Chassis	ARK-6320	ARK-6310 series

Small Form Factor Power Supplies



Model Name	175700007G	1757000105G	1757000160G 1757000229G 1757000263	1757001458 1757001798
Form Factor	2U	2U	1U	1U
Wattage	300 W	400 W	300 W	400 W
Input Range	100 ~ 240 V _{AC} 47 Hz ~ 63 Hz 6 ~ 3 A	100 ~ 240 V _{AC} 47 Hz ~ 63 Hz 8 ~ 5 A	100 ~ 240 V _{AC} 63 ~ 47 Hz 6 ~ 3 A	100 ~ 240 V _{AC} 47 Hz ~ 63 Hz 8 ~ 5 A
Outputs	+5 V @ 35 A (3 A min) +3.3 V @ 20 A (1 A min) +12 V @ 16 A (2 A min) -12 V @ 0.5 A -5 V @ 0.5 A +5 Vsb @ 2 A	+5 V @ 25 A (3 A min) +3.3 V @ 20 A (1 A min) +12 V @ 28 A (2 A min) -12 V @ 0.5 A -5 V @ 0.5 A +5 Vsb @ 2 A	+5 V @ 25 A (3 A min) +3.3 V @ 14 A (1 A min) +12 V @ 16 A (2 A min) -12 V @ 1 A, -5 V @ 0.5 A +5 Vsb @ 2 A	+5 V @ 25 A (3 A min) +3.3 V @ 20 A (1 A min) +12 V @ 28 A (2 A min) -12 V @ 0.5 A, -5 V @ 0.5 A +5 Vsb @ 2 A
MTBF (hrs)	98,000 @ 25C	100,000 @ 25C	100,000 @ 25C	100,000 @ 25C
Dimensions (H x W x D)	70 x 100 x 200 mm (27.56" x 3.94" x 7.87")	70 x 100 x 215 mm (27.56" x 3.94" x 8.46")	40 x 100 x 205 mm (1.57" x 3.94" x 8.07")	40.5 x 100 x 225 mm (1.59" x 3.94" x 8.86")
Safety	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, TUV, CB, CCC
Compatible Chassis	ACP-2010MB, ACP-2320MB	ACP-2010MB, ACP-2320MB	1757000160G: IPC-603MB, IPC-6806W, ACP-1010BP/1320BP 1757000229G: IPC-5120, IPC-7120 1757000263: ACP-1010MB/1320MB	1757001458: ACP-1320MB 1757001798: ACP-1320BP



Model Name	1757000209G	1757000557 1757001457 1757001397 1757001797	1757000878	1757001847
Form Factor	1U	1U	FLEX	FLEX
Wattage	150 W	250 W	180 W	270 W
Input Range	100 ~ 240 V _{AC} 63 Hz ~ 47 Hz 4 ~ 2 A	100 ~ 240 V _{AC} 50 Hz ~ 60 Hz 4 ~ 2 A	100 ~ 240 V _{AC} 50 Hz ~ 60 Hz 4 ~ 2 A	100 ~ 240 V _{AC} 50 Hz ~ 60 Hz 5 ~ 3 A
Outputs	+5 V @ 14 A (2 A min) +3.3 V @ 10 A (1 A min) +12 V @ 6 A (1 A min) -12 V @ 0.8 A -5 V @ 0.5 A +5 Vsb @ 1.5 A	+5 V @ 23 A (3 A min) +3.3 V @ 14 A (1 A min) +12 V @ 16 A (2 A min) -12 V @ 0.5 A -5 V @ 0.2 A +5 Vsb @ 2 A	+5 V @ 16 A (0.3 A min) +3.3 V @ 14 A (0.3 A min) +12 V @ 14 A (0.3 A min) -12 V @ 0.5 A +5 Vsb @ 2 A	+5 V @ 18 A (0.5 A min) +3.3 V @ 16 A (0.5 A min) +12 V1 @ 16 A (1 A min) +12 V2 @ 10 A (1 A min) -12 V @ 0.8 A +5 Vsb @ 2.5 A
MTBF (hrs)	84,000 @ 25C	110,000 @ 25C	100,000 @ 25C	100,000 @ 25C
Dimensions (H x W x D)	40 x 100 x 190 mm (1.57" x 3.94" x 7.48")	40 x 100 x 190 mm (1.57" x 3.94" x 7.48")	40 x 81.5 x 150 mm (1.57" x 3.21" x 5.91")	40 x 81.5 x 150 mm (1.57" x 3.21" x 5.91")
Safety	UL, TUV, CB, CCC	UL, TUV, CB, CCC	UL, CB, CCC	UL, TUV, CB, CCC
Compatible Chassis	IPC-6806S	1757001457: ACP-1010MB/1320MB 1757001797: ACP-1010BP/1320BP 1757000557: IPC-5120/7120 1757001397: IPC-6806	ARK-6610 ARK-6620	IPC-6025