



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




M12 Field Attachable Connectors

RSC | RKC




Male, 3-, 4-, 5-, and 8-Pole

Field attachable connector, M12 male connector, 3-, 4-, 5-, and 8-pole with threaded joint, assembling with screw terminals.

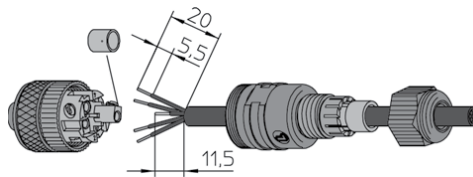

RSC

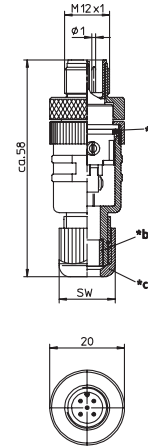


*a O-Ring
 *b gasket
 *c cap nut




Female, 3-, 4-, 5-, and 8-Pole

Field attachable connector, M12 female connector, 3-, 4-, 5-, and 8-pole with threaded joint, assembling with screw terminals.

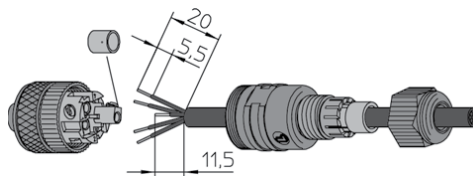

RKC

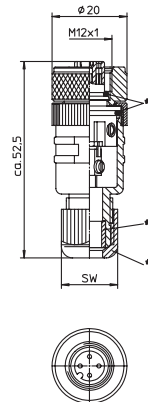


*a O-Ring
 *b gasket
 *c cap nut

Pin Assignments

Face Views / M12, Male / Female


3 pole




4 pole



5 pole



8 pole





Be Certain with Belden

M12 Field Attachable Connectors

RSC | RKC

Technical Data

Environmental







Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body PBT
 Insert PBT
 Contact CuZn, pre-coppered, CuSnZn
 8-poles pre-nickel, gold-plated
 Receptacle shell CuZn, nickel-plated
 O-ring FKM
 Mode of connection Screw terminals
 Connectable conductor 3-5 poles max. 0.75 mm²
 8 poles max. 0.50 mm²

Electrical

Contact resistance ≤ 5 mΩ
 Nominal current at 40°C 3-5 poles 4 A
 8 poles 2 A
 Nominal voltage 3-4 poles 240 V
 5 poles 60 V
 8 poles 30 V
 Rated voltage 3-4 poles 250 V
 5 poles 63 V
 8 poles 36 V
 Test voltage 3-4 poles 2.0 kV eff. / 60 s
 5 poles 1.5 kV eff. / 60 s
 8 poles 0.9 kV eff. / 60 s
 Insulation resistance > 10⁹ Ω
 Pollution degree 3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSC 3/7	RKC 4/3/7	3	Ø 3.0-6.5 mm /SW 15	
RSC 3/9	RKC 4/3/9		Ø 4.0-8.0 mm /SW 19	
RSC 4/7	RKC 4/7	4	Ø 3.0-6.5 mm /SW 15	
RSC 4/9	RKC 4/9		Ø 4.0-8.0 mm /SW 19	
RSC 5/7	RKC 5/7	5	Ø 3.0-6.5 mm /SW 15	
RSC 5/9	RKC 5/9		Ø 4.0-8.0 mm /SW 19	
RSC 8/9	RKC 8/9	8	Ø 4.0-8.0 mm /SW 19	