

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








High Conductivity		Fro m	
Se a m le ss C o p p e r Tub e	Wire Sizes	750 kc mil	
Ele c tro -Tin	Wire Types	Stranded Copper, Class B: Compact, Compressed or Concentric, Class C: Concentr	
Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than			
	Wire Strip Lengths	2.0 in.	
2000 vo lts.	Panduit Color Code	BIACK	
90 ° C	on Barrels	BIACK	
Yes	Panduit Die Index No. on Barrels	P106	
	Alte mate Industry Die Index No.() on Barrels	(24)	
	Seamless Copper Tube Electro-Tin Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	Se a m le ss Copper Tube Ele c tro-Tin Ye s, for a p p lic a tions up to 35kv. Consult c a b le manufac turer for voltage stress re lie f instructions with a p p lic a tions greater than 2000 volts. 90 ° C Ye s Wire Size s Wire Types Wire Strip Lengths Panduit Color Code on Barrels Panduit Die Index No. on Barrels Alte mate Industry Die Index No. ()	

	Fro m	To	
Wire Sizes	750 kc mil	500 FLEX	
Wire Types	Stranded Copper, Class B: Compact, Compressed or Concentric, Class C: Concentric	Stranded Copper Flex; Class I	
Wire Strip Lengths	2.0 in.	2.0 in.	
Panduit Color Code on Barrels	BIACK	PINK	
Panduit Die Index No. on Barrels	P106	P99	
Alte mate Industry Die Index No.() on Barrels	(24)	(400)	





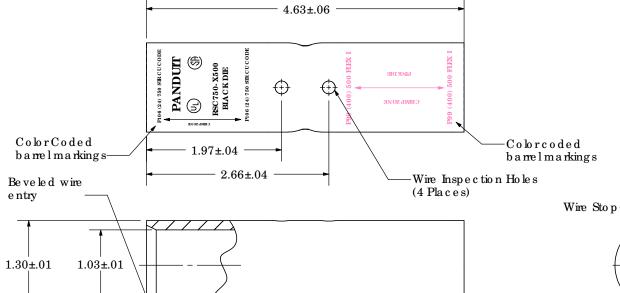

						CORP. TINIEY PARK, ILLINOIS
						RSC 750-X500-6
01	3/04	JHNU	JCSH	Removed dimension; added note.	11603	Copper Reducing Splice With Inspection Holes
REV	DATE	ВҮ	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE RSC 750-X500-C UST