



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101**


RST -RKT | RST-RKWT



**3-, 4-, 5- and 8-Poles**


Actuator/sensor cordset, double-ended, M12, 3-, 4-, 5- and 8-poles, male straight to female straight connector with self-locking thread and molded TPE, PUR, or PVC cable, IEC color code.

RST-RKT



Actuator/sensor cordset, double-ended, M12, 3-, 4-, 5- and 8-poles, male straight to female 90° connector with self-locking thread and molded TPE, PUR, or PVC cable, IEC color code.


RST-RKWT

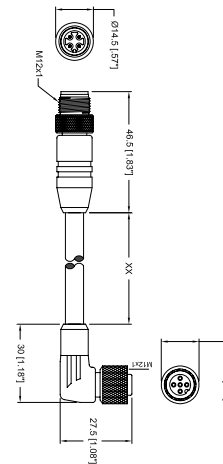


**Pin Assignments**

M12 - Male/Female


**3 poles**




**4 poles**




**5 poles (794)**



**5 poles (all others)**



**8 poles**





## M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101

RST-RKT | RST-RKWT

### Technical Data

#### Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	PUR: -40°C (-40°F) / +80°C (176°F) PVC: -40°C (-40°F) / +90°C (194°F) TPE: -40°C (-40°F) / +90°C (194°F)

#### Mechanical

Housing / Molded body	PUR, yellow RST 8-RKT 8-627: PUR, black RST 8-RKWT 8-627: PUR, black
Insert	PUR, Yellow RST 8-RKT 8-627: PUR, orange RST 8-RKWT 8-627: PUR, orange
Contacts	CuSn, gold over nickel-plated
Coupling nut	CuZn, nickel-plated
O-ring (female only)	FKM or Viton

#### Electrical

Current rating	4 A
RST 8-RKT 8-XXX:	1.5A
Voltage rating	250 V 5-Pole: 60V 8-Pole: 30 V AC /36 V DC

### Cable Specifications

Cable No.	Outer Jacket	Gauge	Jacket Color	OD
<b>602</b>	<b>PUR</b>	<b>18AWG</b>	Yellow	.230" (5.8 mm)
Continuous flex rating and suitable for general C-track usage. 1 million cycles at minimum bend radius 10X cable diameter.				
<b>610</b>	<b>PUR</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>612</b>	<b>PVC</b>	<b>22AWG</b>	Yellow	.210" (5.3 mm)
<b>627</b>	<b>PVC</b>	<b>24AWG</b>	Black	.232" (5.9 mm)
<b>632</b>	<b>PVC</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>633</b>	<b>PVC</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>637</b>	<b>TPE/PLTC</b>	<b>18AWG</b>	Yellow	.280" (7.1 mm)
<b>643</b>	<b>TPE/PLTC</b>	<b>22AWG</b>	Yellow	.246" (6.2 mm)
<b>644</b>	<b>PUR</b>	<b>22AWG</b>	Yellow	.210" (5.3 mm)
<b>645</b>	<b>PUR</b>	<b>18AWG</b>	Yellow	.220" (5.6 mm)
<b>679</b>	<b>PUR</b>	<b>22AWG</b>	Yellow	.190" (4.8 mm)
<b>713</b>	<b>TPE/PLTC</b>	<b>22AWG</b>	Yellow	.280" (7.1 mm)
<b>727</b>	<b>TPE/PLTC</b>	<b>22AWG</b>	Yellow	.335" (8.5 mm)
<b>731</b>	<b>TPE/PLTC</b>	<b>18AWG</b>	Yellow	.261" (6.6 mm)
<b>794</b>	<b>TPE/PLTC</b>	<b>18AWG</b>	Yellow	.304" (7.7 mm)

Part Number	Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3-RKT 4-3-731/...M RST 3-RKWT 4-3-731/...M	3	TPE/PLTC	2 M / 5 M / 10 M	
RST 3-RKT 4-3-632/...M RST 3-RKWT 4-3-632/...M		PVC	2 M / 5 M / 10 M	
RST 3-RKT 4-3-645/...M RST 3-RKWT 4-3-645/...M		PUR	2 M / 5 M / 10 M	
RST 3-RKT 4-3-610/...M RST 3-RKWT 4-3-610/...M		PUR	2 M / 5 M / 10 M	
RST 4-RKT 4-637/...M RST 4-RKWT 4-637/...M	4	TPE/PLTC	1 M / 2 M / 3 M / 5 M / 6 M / 10 M	
RST 4-RKT 4-633/...M RST 4-RKWT 4-633/...M		PVC	2 M / 5 M / 10 M	
RST 4-RKT 4-643/...M RST 4-RKWT 4-643/...M		TPE/PLTC	1 M / 2 M / 5 M / 10 M	
RST 4-RKT 4-602/...M RST 4-RKWT 4-602/...M		PUR	1 M / 2 M / 3 M / 4 M / 5 M / 6 M / 10 M	
RST 4-RKT 4-679/...M RST 4-RKWT 4-679/...M		PUR	2 M / 5 M / 10 M	
RST 5-RKT 5-612/...M RST 5-RKWT 5-612/...M	5	PVC	2 M / 5 M / 10 M	
RST 5-RKT 5-644/...M RST 5-RKWT 5-644/...M		PUR	2 M / 5 M / 10 M	
RST 5-RKT 5-713/...M RST 5-RKWT 5-713/...M		TPE/PLTC	2 M / 5 M / 10 M	
RST 5-RKT 5-794/...M RST 5-RKWT 5-794/...M		TPE/PLTC	2 M / 5 M / 10 M	
RST 8-RKT 8-627/...M RST 8-RKWT 8-627/...M	8	PVC	2 M / 5 M / 10 M	
RST 8-RKT 8-727/...M RST 8-RKWT 8-727/...M		TPE/PLTC	2 M / 5 M / 10 M	