



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

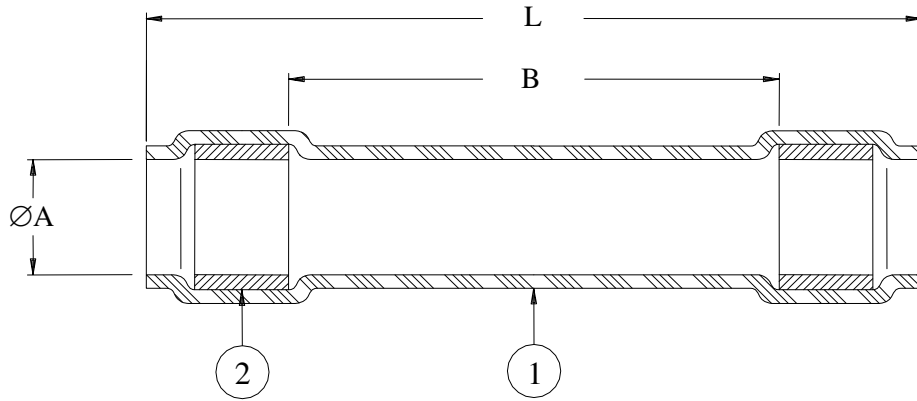

Part Description	Product Dimensions		
	L Max	B Ref	ØA Min
RT-555-3/8-2.75-A260-0	69.9 (2.75)	25.4 (1.00)	8.9 (0.35)
RT-555-3/8-4.75-A260-0	120.7 (4.75)	76.2 (3.00)	8.9 (0.35)
RT-555-1/2-2.75-A260-0	69.9 (2.75)	25.4 (1.00)	12.7 (0.50)
RT-555-1/2-5.75-A260-0	146.1 (5.75)	101.6 (4.00)	12.7 (0.50)
RT-555-3/4-3.00-A260-0	76.2 (3.00)	31.8 (1.25)	18.3 (0.72)
RT-555-3/4-4.75-A260-0	120.6 (4.75)	76.2 (3.00)	18.3 (0.72)
RT-555-3/4-6.75-A260-0	171.5 (6.75)	127.0 (5.00)	18.3 (0.72)
RT-555-1.0-3.75-A260-0	95.3 (3.75)	50.8 (2.00)	22.8 (0.90)
RT-555-1.0-4.75-A260-0	120.6 (4.75)	76.2 (3.00)	22.8 (0.90)
RT-555-1.0-6.75-A260-0	171.5 (6.75)	127.0 (5.00)	22.8 (0.90)

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified fluoropolymer. Color: Black.
2. MELTABLE INSERT: Environment resistant modified thermoplastic fluoroelastomer. Color: Light Blue

APPLICATION

1. This part is designed to provide an immersion resistant seal on wires having insulation diameters as specified on table and temperature rating of at least +150°C (302°F).
2. Temperature range: -65°C to +200°C (-85°F to +392°F).
Maximum temperature of 260°C (500°F) when exposed for 500 continuous hours.

			TITLE: SEALING SLEEVE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets] DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009		Raychem Molded Parts	DOCUMENT NO.: RT-555-X/X-YYY-A260-0		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: E	DATE: August 3, 2012
PREPARED BY: RODRIGUEZ	CAGE CODE: 06090	ECO NUMBER: ECO-12-014108		SCALE: NTS	SIZE: A SHEET: 1 of 1