



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Precision Thin Film Chip Resistors

PFC Series

- Standard 60/40 Sn/Pb and Pb-free (RoHS compliant) terminations available
- Available in 0402, 0603, 0805 and 1206
- Tested for COTS applications
- Absolute TCR to $\pm 10\text{ppm}/^\circ\text{C}$
- MIL screening available
- Superior anti-sulfuration characteristics

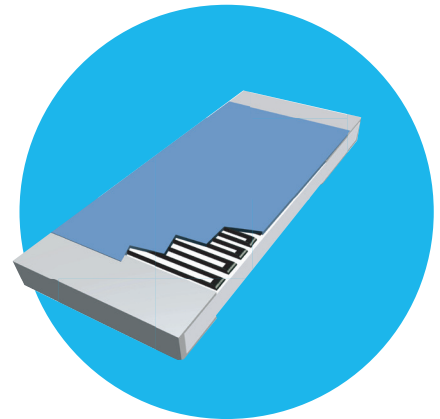

 All Pb-free parts comply with EU Directive 2011/65/EU (RoHS2)

The TaNFilm® PFC chip resistor series provides the high precision and ultra stable performance of our Tantalum Nitride resistive film system in 0402, 0603, 0805 and 1206 sizes. The unique characteristics of the passivated Tantalum Nitride film ensure long term life stability and reliability in most environments. Qualified for resistance to sulfur bearing gases, the PFC series is an excellent solution for automotive and heavy equipment applications where precision, exceptional reliability with anti-sulfuration characteristics is imperative.

Using the same manufacturing line as the PFC Military Series, these precision chips maintain the same superior environmental performance. Specially selected materials and processes insure initial precision is maintained in the harshest surface mount soldering environment. Wrap-around terminations with leach-resistant nickel barriers insure high integrity solder connections.

Electrical Data

| Model | Power Rating (70°C) | Max Voltage Rating ($\leq \sqrt{P \times R}$) | Temperature Range | ESD Sensitivity | Noise | Termination | Substrate |
|-------|---------------------|---|-------------------|------------------|--------|--|---------------|
| W0402 | 50mW | 75V | -65°C to +150°C | 2KV to 4KV (HBM) | <-25dB | 100% matte tin (RoHS compliant) plated over nickel barrier | 99.5% Alumina |
| W0603 | 100mW | 75V | | | | | |
| W0805 | 250mW | 100V | | | | | |
| W1206 | 333mW | 200V | | | | | |


Environmental Data

| Environmental Test | Test Method | Performance | |
|---|---|--------------|--------------|
| | | Typical | Maximum |
| Sulfuration Test (ASLF terminations only) | ASTM B-809 (Modified) 105°C Dry, 1000 Hours | $\pm 0.02\%$ | $\pm 0.05\%$ |
| Thermal Shock | MIL-PRF-55342 | $\pm 0.02\%$ | $\pm 0.10\%$ |
| Low Temperature Operation | MIL-PRF-55342 | $\pm 0.01\%$ | $\pm 0.05\%$ |
| Short Time Overload | MIL-PRF-55342 | $\pm 0.01\%$ | $\pm 0.05\%$ |
| High Temperature Exposure | MIL-PRF-55342 | $\pm 0.03\%$ | $\pm 0.10\%$ |
| Effects of Solder | MIL-PRF-55342 | $\pm 0.01\%$ | $\pm 0.10\%$ |
| Moisture Resistance | MIL-PRF-55342 | $\pm 0.03\%$ | $\pm 0.10\%$ |
| Life | MIL-PRF-55342 | $\pm 0.03\%$ | $\pm 0.10\%$ |


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Manufacturing Capabilities Data

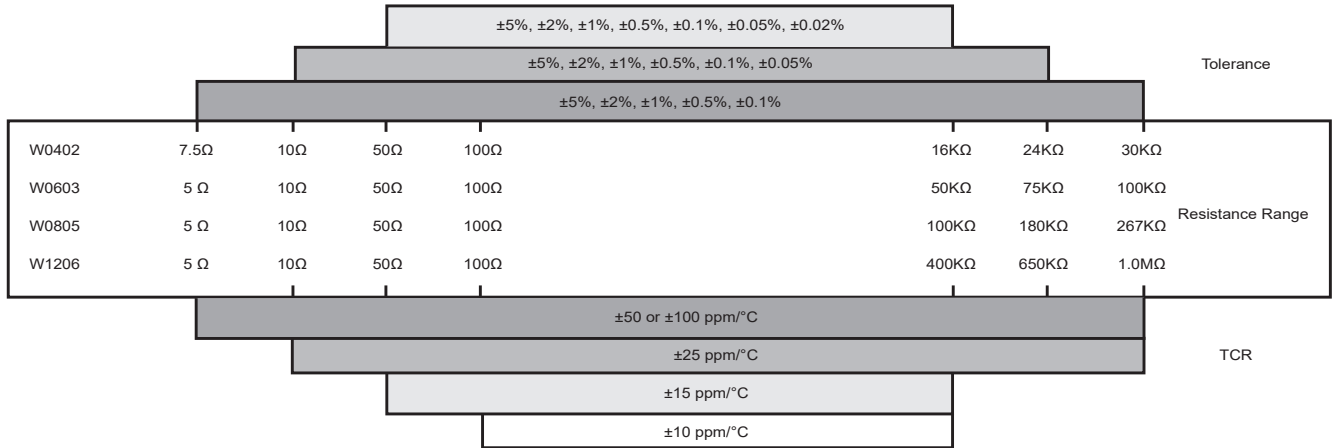

Power Derating Curve

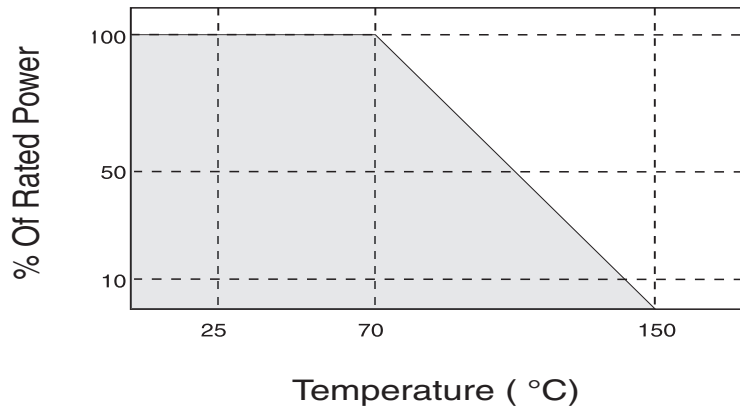

Physical Data

| Model | L | W | H | a | b |
|-------|------------------------------|------------------------------|-----------------------------|-----------------------------|------------------------------|
| W0402 | 0.04 ±0.002 (1.02 ±0.05) | 0.021 ±0.002 (0.53 ±0.05) | 0.012 ±0.003 (0.3 ±0.08) | 0.008 ±0.002 (0.2 ±0.05) | 0.01 ±0.002 (0.25 ±0.05) |
| W0603 | 0.063 ±0.004 (1.6 ±0.1) | 0.031 ±0.004 (0.79 ±0.1) | 0.02 ±0.004 (0.51 ±0.1) | 0.012 ±0.005 (0.3 ±0.13) | 0.015 ±0.005 (0.38 ±0.13) |
| W0805 | 0.081 ±0.005 (2.06 ±0.13) | 0.05 ±0.005 (1.27 ±0.13) | 0.02 ±0.006 (0.51 ±0.15) | 0.015 ±0.008 (0.38 ±0.2) | 0.016 ±0.008 (0.41 ±0.2) |
| W1206 | 0.126 ±0.006 (3.2 ±0.15) | 0.063 ±0.005 (1.6 ±0.13) | 0.024 ±0.004 (0.61 ±0.1) | 0.025 ±0.01 (0.64 ±0.25) | 0.025 ±0.01 (0.64 ±0.25) |

MIL Screened Precision Chip Resistors

IRC's PFC chip resistors are available with MIL screening. These chips are manufactured on the same production line as our Mil-qualified chip resistors and screened in accordance with MIL-PRF-55342.

These chips are identified with IRC's ordering information and not with MIL marking.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Ordering Procedure

This product has two valid part numbers:

European (Welwyn) Part Number: W1206R-01-1K0BI (1206, 100ppm/°C, 1 kilohm ±0.1%, Pb-free)



| 1 | 2 | 3 | 4 | 5 | 6 | |
|-------|------|-------------------|----------------------|------------|---------------------------------|-----------|
| Type | Size | TCR | Value | Tolerance | Termination & Packing | |
| W=PFC | 0402 | R-12 = ±10ppm/°C | E24 = 3/4 characters | Q = ±0.02% | I = Pb-free, Standard pack | |
| | 0603 | R-11 = ±15ppm/°C | E96 = 3/4 characters | A = ±0.05% | PB = SnPb finish, Standard pack | |
| | 0805 | R = ±25ppm/°C | R = ohms | B = ±0.1% | All sizes | 1000/reel |
| | 1206 | R-02 = ±50ppm/°C | K = kilohms | D = ±0.5% | | |
| | | R-01 = ±100ppm/°C | M = megohms | F = ±1% | | |
| | | | | G = ±2% | | |
| | | | | J = ±5% | | |

USA (IRC) Commercial Part Number: PFC-W1206LF-01-1001-B (1206, 100ppm/°C, 1 kilohm ±0.1%, Pb-free)



| 1 | 2 | 3 | 4 | 5 | 6 | Packing | |
|--------|-------|--|-----------------|----------------------------------|------------|-----------|-----------|
| Family | Model | Termination | TCR | Value | Tolerance | | |
| PFC | W0402 | R = SnPb (60/40) | 12 = ±10ppm/°C | 3 digits + multiplier | Q = ±0.02% | All sizes | 1000/reel |
| | W0603 | LF = Pb-free (100%Sn) | 11 = ±15ppm/°C | R = ohms for values <100 ohms | A = ±0.05% | | |
| | W0805 | ASLF = Anti-sulfur & Pb-free (100%Sn) | 03 = ±25ppm/°C | | B = ±0.1% | | |
| | W1206 | | 02 = ±50ppm/°C | D = ±0.5% | | | |
| | | | 01 = ±100ppm/°C | F = ±1% | | | |
| | | | | | G = ±2% | | |
| | | | | | J = ±5% | | |

USA (IRC) Mil Screened Part Number*: PFC-W1206R-05-1001-B (1206, 100ppm/°C, 1 kilohm ±0.1%,)



| 1 | 2 | 3 | 4 | 5 | 6 | Packing | |
|--------|-------|------------------|-----------------|----------------------------------|-----------|-----------|-----------|
| Family | Model | Termination | TCR | Value | Tolerance | | |
| PFC | W0402 | R = SnPb (60/40) | 16 = ±10ppm/°C | 3 digits + multiplier | B = ±0.1% | All sizes | 1000/reel |
| | W0603 | | 15 = ±15ppm/°C | R = ohms for values <100 ohms | D = ±0.5% | | |
| | W0805 | | 14 = ±20ppm/°C | | F = ±1% | | |
| | W1206 | | 07 = ±25ppm/°C | G = ±2% | | | |
| | | | 06 = ±50ppm/°C | J = ±5% | | | |
| | | | 05 = ±100ppm/°C | | | | |
| | | | 04 = ±300ppm/°C | | | | |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.