



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Specification Sheet

Part Number: RT50S9C2

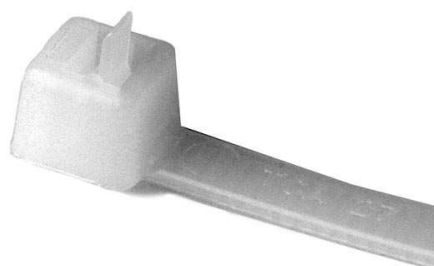

Releasable Cable Tie, Release Tab, 6.3" Long, 50 lb Tensile Strength, PA66, Natural, 100/pkg

<b>Article Number</b>	115-06319
<b>Type</b>	RT50S
<b>Color</b>	Natural (NA)
<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>• Special extended-pawl design offers a release feature for quick and easy access to wire bundles.</li><li>• Head design provides high tensile strength with very low insertion force even after repeated use.</li><li>• Bent tail ensures a quick and simple installation.</li></ul>
<b>Quantity Per</b>	bag

### Product Description

HellermannTyton Releasable Cable Ties offer a release feature in the head allowing for easy access to wire bundles when changes are necessary. The head design guarantees high tensile strength even after repeated use, as well as a low insertion force. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

<b>Short Description</b>	Releasable Cable Tie, Release Tab, 6.3" Long, 50 lb Tensile Strength, PA66, Natural, 100/pkg
<b>Global Part Name</b>	RT50S-PA66-NA
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	225.0
<b>Length L (Imperial)</b>	6.3
<b>Length L (Metric)</b>	160.0
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	Yes
<b>Tie Closure</b>	plastic pawl
<b>Variant</b>	Inside Serrated
<b>Width W (Imperial)</b>	0.18
<b>Width W (Metric)</b>	4.6
<b>Bundle Diameter Min (Imperial)</b>	0.06
<b>Bundle Diameter Min (Metric)</b>	1.5
<b>Bundle Diameter Max (Imperial)</b>	1.38
<b>Bundle Diameter Max (Metric)</b>	35.0

<b>Thickness T (Imperial)</b>	0.05
<b>Thickness T (Metric)</b>	1.2
<b>Height H (Imperial)</b>	.06
<b>Height H (Metric)</b>	1.40
<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	UL-ZODZ2.E64139
<b>UL Recognized (US)</b>	Yes
<b>UL Recognized (US and Canada)</b>	Yes
<b>Package Quantity(Imperial)</b>	100
<b>Package Quantity (Metric)</b>	100

**Customs Number**

3926909987

**Content Unit(BMEcat)**

pcs.

**Weight (Metric)**

1.2