

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1		FIRST RELEASED	May.9.2017	Ben	Tommy
A2	-	UPDATE NOTES	Jun.20.2017	Nick	Tommy
A3	1	UPDATE PANEL CUT OUT REFERENCE	Aug.10.2017	Nick	Tommy
A4	-	UPDATE DRAWING	Mar-19-2018	White	Tommy
A5	-	UPDATE DRAWING	Apr-10-2018	White	Tommy



MASTER KEYWAY -24.0 2 8 18.5 24.0




NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

SHELL: THERMOPLASTIC, UL94 V-0. INSERT: THERMOPLASTIC, UL94 V-0. SEAL GASKET: NBR OR SILICONE RUBBER.

- 2. SPECIFICATIONS:
 - 2.1 RATED CURRENT:
 - 2.1.1 STAMPED CONTACT 5A (MAX). 2.1.2 MACHINED CONTACT 7.5A (MAX).
 - 2.2 RATED VOLTAGE: 250V(AC/DC).
 - 2.3, OPERATING TEMPERATURE : SEE TABLE.
 - 2.4, DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE@2000 VOLTS AC.
 - 2.5, INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 - 2.6, IP-CLASS: IP67 AND IP69K IN THE MATED CONDITION, PANEL EXTERNAL.
 - 2.7, MATING CYCLES DURABILITY: 500 CYCLES MIN.
 - 2.8, Rohs Compliant.
- 3. SUITABLE CONTACTS: 20# CONTACT.
- 4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

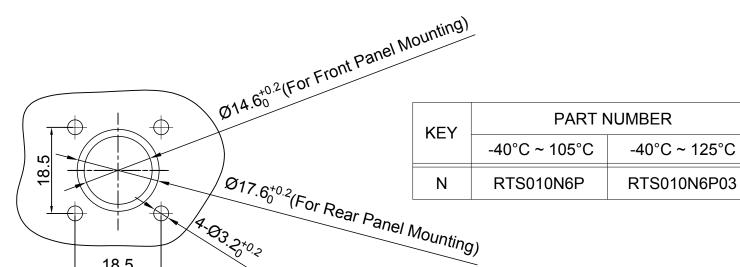

PANEL CUT OUT REFERENCE

18.5

QUANTITY	PART NUMBER			DESCRIPTION				ITEM		
MATERIALS LIST										
1) All dimensions a 2) Tolerances are a	as follows:	SIGNATUR DRAWN: White		Apr-10-2018	Amphenol					
1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 3) Note reference:	Fractions ±1/64 Angles ±1°	CHECKED: Tod		Apr-10-2018	Sine Systems - www.amphenol-sine.com 44724 Morley Drive			e.com		
MATERIAL SPECIFICATIONS:		APPROVAL: Tomm	у	Apr-10-2018	Clinton Township, MI 48036 ECO-MATE. RECEPTACLE.					
		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY, DESIGN FEATURES.					ANGE, SIZE 10, 6 POS, PIN			
		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL		В	CPE	RTS010*6Pxx	A5			
NEXT ASS'Y:		MANUFACTURING VARIATIONS.			SCALE: NO	NE	SHEET 1 OI	1		