



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Tyco/Electronics**  
**Raychem Circuit Protection**  
 308 Constitution Drive  
 Menlo Park, CA 94025-1164  
 Phone: 800-227-4856  
 Fax: 800-227-4866

**PolySwitch®**  
**PTC Devices**  
 Overcurrent Protection Device

**PRODUCT: RXE040**

DOCUMENT: SCD 21865  
 PCN: 401247  
 REV LETTER: G  
 REV DATE: AUGUST 20, 2001  
 PAGE NO.: 1 OF 1

**Specification Status: RELEASED**

**Electrical Rating**

**Voltage: 72V MAX**

**Current: 40A MAX**

**Insulating Material:**


Cured, Flame Retarded Epoxy Polymer  
 meets UL94 V-0 Requirements

**Lead Material:**

24 AWG Tin Lead Plated Copper Clad Steel

**Marking:**

- ┌───┐ Raychem Logo and Voltage
- ⊗ 72
- X 040 Part Identification
- Lot Identification (can be on back)

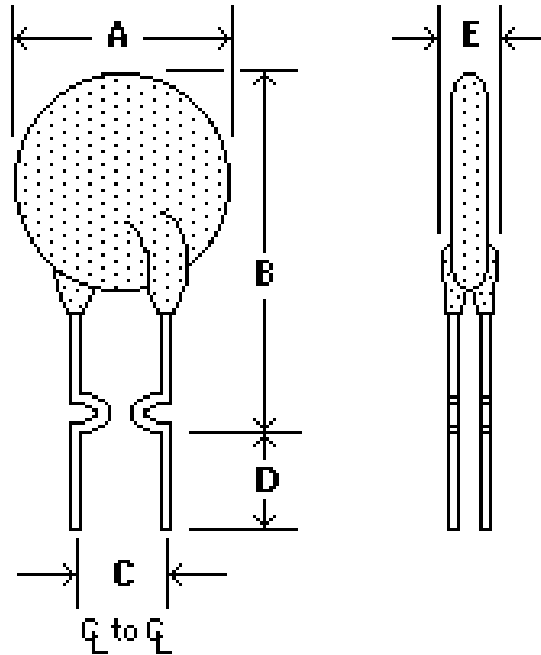

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	7.6	--	13.5	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.30)	--	(0.53)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I <sub>H</sub> RATED CURRENT	CURRENT RATINGS						TIME TO TRIP	INITIAL RESISTANCE VALUES		ONE-HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION
	AMPERES 20°C HOLD	AMPERES AT 0°C HOLD	AMPERES AT 20°C TRIP	AMPERES AT 60°C HOLD	AMPERES AT 60°C TRIP	AMPERES AT 60°C TRIP		SECONDS AT 20°C, 2.0A MAX	OHMS AT 20°C MIN		
.40	.48	.96	.40	.80	.26	.52	3.8	.55	.86	1.29	.56

**Recognitions:**

UL, CSA and TUV approved.

**Reference Documents:**

Approved by UL as a current limiting impedance, per the 1996 NEC, Tables 11 (c) and 11 (b).  
 PS300

**Precedence:**

This specification takes precedence over documents referenced herein.

**Effectivity:**

Reference documents shall be the issue in effect on the date of invitation for bid.

**CAUTION:**

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.