



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us






Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ITEM NO.	QTY.	DESCRIPTION	DRAWING # REF
1	1	B92CD-A351	10127
2	184	EZB-DHM	256

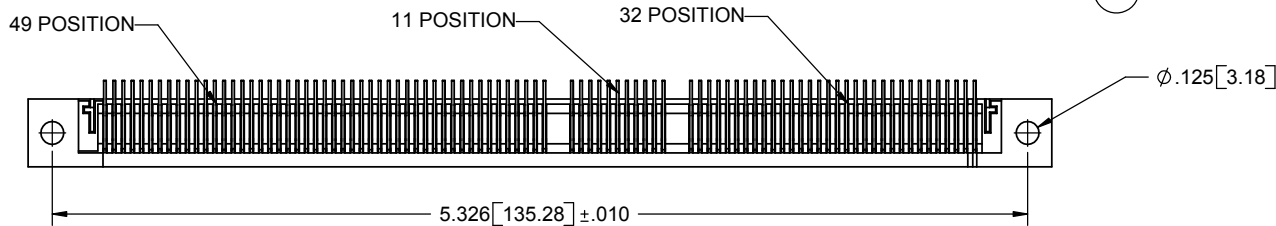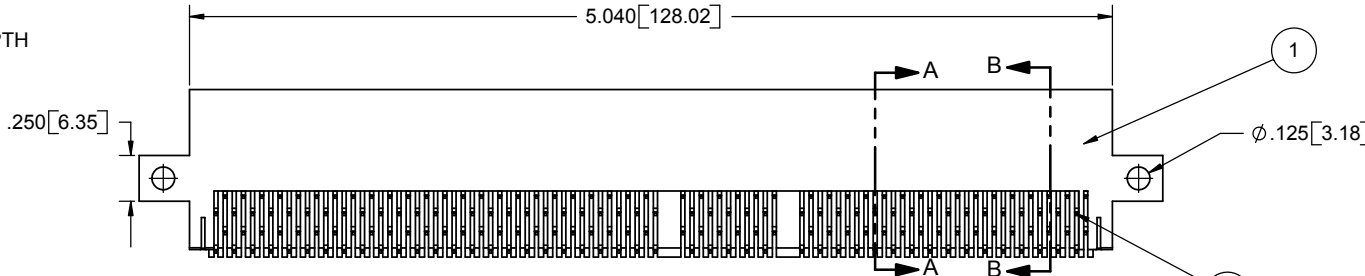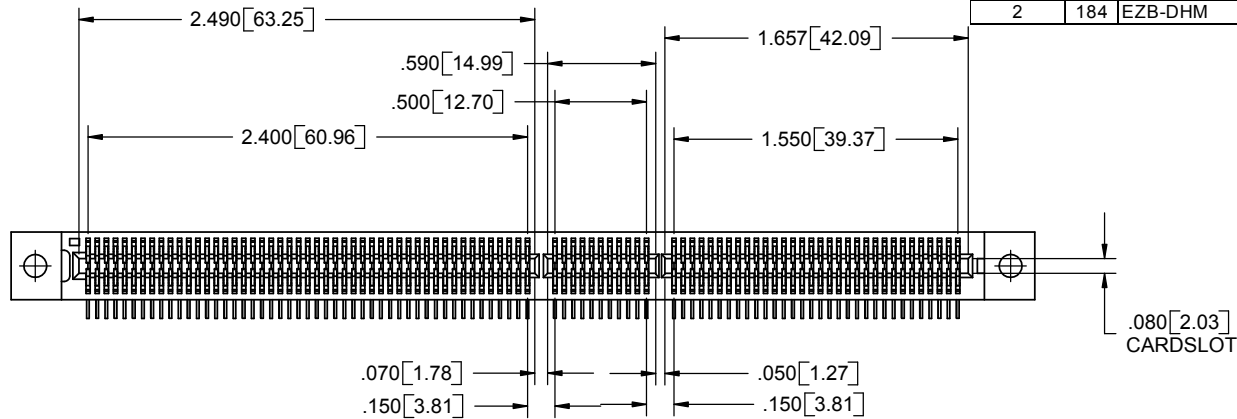

- NOTES:
- THIS SPECIFICATION COVERS THE REQUIREMENT FOR A DUAL 92/184 ROW EDGECARD CONNECTOR
 - INSULATOR MATERIAL: POLYPHENYLENE SULFIDE. (BLACK)
 - CONTACT MATERIAL: PHOSPHOR BRONZE.
 - PLATING: .00001" GOLD ON CONTACT SURFACE
.00001" TIN/LEAD ON TERMINAL
.00005" NICKEL UNDERPLATE
 - TEMPERATURE: -65°C TO 125°C
 - UL FLAMMABILITY RATING: 94V-0
 - VOLTAGE RATING: 125 VDC MINIMUM AT SEA LEVEL.
 - CURRENT RATING: 1 AMP
 - VOLTAGE DROP: 30 MILLI VOLT AT RATED CURRENT
 - INSULATION RESISTANCE: 1000 MEGA OHM
 - CONNECTOR IDENTIFICATION: THE PART SHALL BE MARKED WITH A PART NUMBER AND DATE CODE.
 - BOARD THICKNESS ACCOMMODATED: .062 [1.57]
 - BOARD INSERTION FORCE: 6 OUNCE AVERAGE PER CONTACT PAIR USING .062 [1.57] PCB
 - BOARD WITHDRAWAL FORCE: 1 OUNCE MINIMUM PER CONTACT PAIR USING .062 [1.57] PCB
 - TOLERANCE: $\pm .010$ " UNLESS OTHERWISE NOTED.
 - MODIFICATION: MOLDED KEY BETWEEN POSITIONS 49 AND 52, 62 AND 65

COMPUTER GENERATED DOCUMENT DO NOT CHANGE MANUALLY

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING AND DESIGN IS THE PROPERTY OF SULLINS ELECTRONICS. IT MAY NOT BE USED FOR ANY PURPOSE OTHER THAN BY THE OWNER. SULLINS ELECTRONICS DOES NOT AUTHORIZE THE REPRODUCTION OR CONVEYANCE OF ANY INFORMATION CONTAINED HEREIN.

REV.	ECO NO.	DESCRIPTION	DATE	BY	APP'VD
A	120	ORIGINAL RELEASE	01/09/04	AN	AJT
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/32$ ANGULAR: $\pm 1^\circ$ TWO PLACE DECIMAL: $\pm .02$ THREE PLACE DECIMAL: $\pm .005$ FOUR PLACE DECIMAL: $\pm .0005$ INTERPRET GEOMETRIC TOLERANCING PER:	DRAWN: ARIA CHECKED: AJT	SULLINS ELECTRONICS	
		MATERIAL: NOTED	PART NO./DESCRIPTION: RZB92DHAS-S250		SIZE: C
		FRISH: N/A	DWG. NO.: 10126		REV: A
		APPLICATION: DO NOT SCALE DRAWING	SCALE: 2:1		SHEET 1 OF 1