



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ITEM NO.	QTY.	DESCRIPTION	DRAWING # REF
1	1	B92HN-A353	10120
2	184	E B-DHH	10011

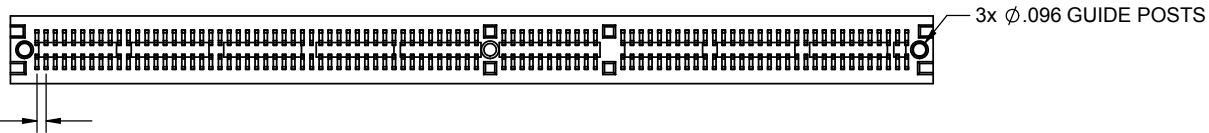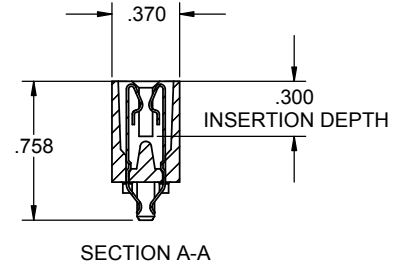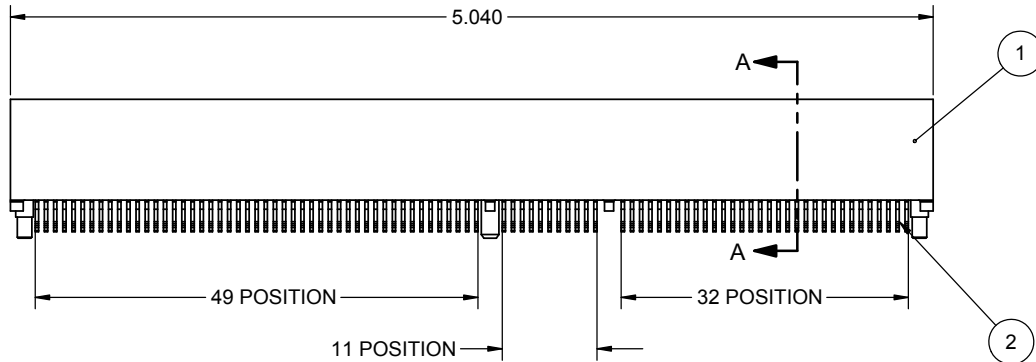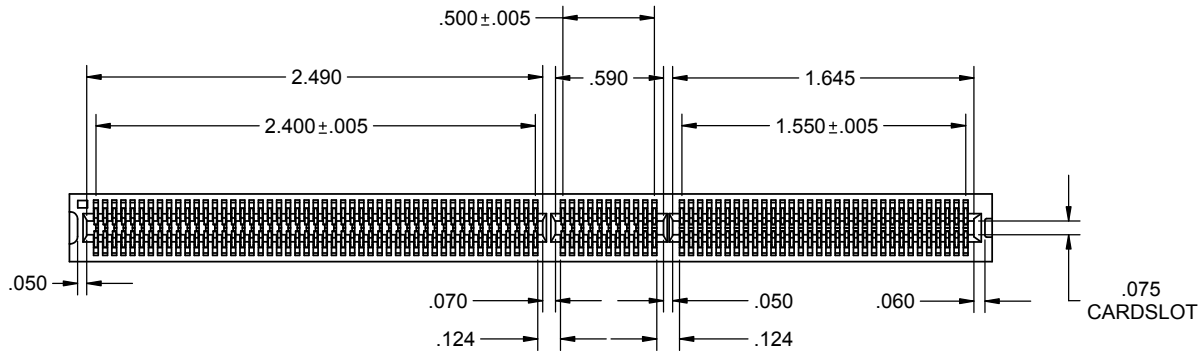

NOTES:

- THIS SPECIFICATION COVERS THE REQUIREMENT FOR A DUAL CARD EXTENDER EDGECARD CONNECTOR.
- INSULATOR MATERIAL: POLYPHENYLENE SULFIDE.
- CONTACT MATERIAL: PHOSPHOR BRONZE.
- PLATING: Z PLATING: .00001" GOLD ON CONTACT SURFACE
.0001" TIN/LEAD ON TERMINAL
.00005" NICKEL UNDERPLATE
- TEMPERATURE: -65°C TO 125°C
- UL FLAMMABILITY RATING: 94V-0
- VOLTAGE RATING: 125 VDC MINIMUM AT SEA LEVEL.
- CURRENT RATING: 1 AMP
- VOLTAGE DROP: 30 MILLI VOLT AT RATED CURRENT
- INSULATION RESISTANCE: 1000 MEGA OHM
- CONNECTOR IDENTIFICATION: THE PART SHALL BE MARKED WITH A PART NUMBER AND DATE CODE.
- BOARD THICKNESS ACCOMMODATED: .054/.070
- BOARD INSERTION FORCE: 6 OUNCE AVERAGE PER CONTACT PAIR USING .062 PCB
- BOARD WITHDRAWL FORCE: 1 OUNCE MINIMUM PER CONTACT PAIR USING .062 PCB
- TOLERANCE: ±.010" UNLESS OTHERWISE NOTED.
- MODIFICATION: CARD EXTENDER BEND

COMPUTER GENERATED DOCUMENT DO NOT CHANGE MANUALLY

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING AND DESIGN IS THE PROPERTY OF SULLINS ELECTRONICS. IT MAY NOT BE USED FOR ANY PURPOSE OTHER THAN BY THE OWNER. SULLINS ELECTRONICS DOES NOT AUTHORIZE THE REPRODUCTION OR CONVEYANCE OF ANY INFORMATION CONTAINED HEREIN.

REV.	A	118	ORIGINAL RELEASE	01/08/04	AN	AJT
ECO NO.	DESCRIPTION			DATE	BY	APP'VD
	UNLESS OTHERWISE SPECIFIED:			DATE	NAME	
	DIMENSIONS ARE IN INCHES			DRAWN	ARIA	
	TOLERANCES:			CHECKED	AJT	
	FRACTIONAL: 1/32			COMMENTS:		
	ANGULAR: ± 1°					
	TWO PLACE DECIMAL ± .02					
	THREE PLACE DECIMAL ± .005					
	FOUR PLACE DECIMAL ± .0005			PART NO./DESCRIPTION:		
	INTERPRET GEOMETRIC TOLERANCING PER:			RZB92DHRN-S378		
	MATERIAL:			SIZE DWG. NO.		
	NEXT ASSY USED ON FINISH N/A			C 10119		
	APPLICATION DO NOT SCALE DRAWING			SCALE: 2:1		
				SHEET 1 OF 1		

