



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION CONTROL DRAWING

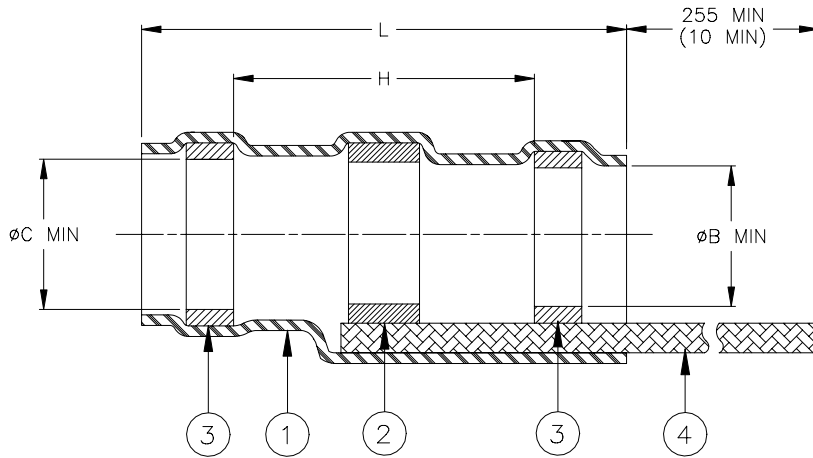

Product Revision		Product Dimensions				Cable Dimensions			
Product Name		Ident. Code	L±1.75 (L±0.07)	øB min.	øC min.	H min.	øE max.	øF min.	øD max.
S03-06-R-100HN	A	S0306R	16.5 (0.650)	1.90 (0.075)	2.67 (0.105)	8.20 (0.323)	2.67 (0.105)	0.90 (0.035)	1.90 (0.075)
S03-07-R-100HN	A	S0307R	16.5 (0.650)	2.67 (0.105)	3.68 (0.145)	8.20 (0.323)	3.68 (0.145)	1.40 (0.055)	2.67 (0.105)
S03-08-R-100HN	A	S0308R	16.5 (0.650)	4.32 (0.170)	5.08 (0.200)	8.20 (0.323)	5.08 (0.195)	2.15 (0.085)	4.32 (0.170)
S03-09-R-100HN	A	S0309R	19.1 (0.750)	5.97 (0.235)	6.48 (0.255)	8.20 (0.323)	6.48 (0.255)	3.30 (0.130)	5.97 (0.235)
S03-10-R-100HN	A	S0310R	19.1 (0.750)	6.98 (0.275)	7.62 (0.300)	8.20 (0.323)	7.62 (0.300)	4.30 (0.170)	6.98 (0.275)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX AND THERMAL INDICATOR:
 SOLDER: TYPE Sn63 per ANSI-J-STD-006.
 FLUX: TYPE ROL1 per ANSI-J-STD-004.
 THERMAL INDICATOR: Color change violet to colorless.
- MELTABLE RINGS: Stabilized thermoplastic. Color: blue.
- PRE-INSTALLED BRAID: Nickel plated copper strands per ASTM B355 Class 7. CMA 640.

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed and having tin or silver plated shields and insulation compatible with the insert material.
For compatible insulations, see MIL-S-83519/2 or consult Raychem.
- When installed per Raychem process standard RCPS-100-70, assemblies will meet those requirements of Raychem Specification RT-1404 and MIL-S-83519/2 which do not require electrical testing while parts are immersed in water.
- Temperature range: -55°C to +150°C.
- Parts shall be marked with identification code per table.

For best results, prepare the cable as shown:

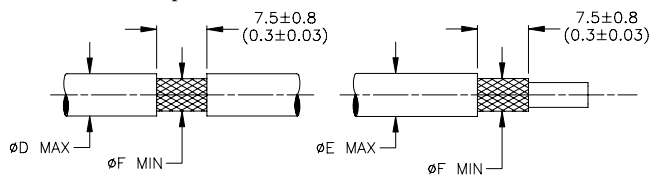

Raychem		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		TITLE: SOLDERSLEEVE* DEVICE SHIELD TERMINATION WITH BRAID	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.						DOCUMENT NO.: S03-XX-R-100HN	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D990967	
REPLACES: N/A		DRAWN BY: M. FORONDA		DATE: 12/03/99		PROD. REV. SEE TABLE	
DOC ISSUE: 0		SCALE: None		SIZE: A		SHEET: 1 of 1	

* A trademark of Raychem Corporation.

If this document is printed it becomes uncontrolled. Check for the latest revision.