



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





S075W-038C2000-L02-UN-D2

75W Programmable LED Driver



Electrical Specifications

Maximum Power:	75W
Typical Efficiency:	88%
Input Voltage Range:	120-277 Vac \pm 10%
Frequency:	50/60 Hz
Power Factor:	> 0.90 @ 80-100% load, 120-277Vac
Inrush Current:	25A @ 120V, 50A @ 277V
Input Current (Max):	0.88A @ 120Vac, 0.34A @ 277Vac
Output Dimming Range:	1-100% (20mA @ Max POC)
Load Regulation:	\pm 2%
Line Regulation:	\pm 1%
THD:	<20% @ 80-100% load, 120-277Vac
Start Up Time	<750ms @ 100% load
Output Current Ripple:	<3% Io

Protections


Over-voltage:	Auto recovery
Over-current:	Auto recovery
Short Circuit:	Auto recovery
Over-temperature:	Reduce Output To 50% @ Tc \geq 90

Environmental Specifications

Max Case Life Temp: (5 year warranty)	75°C
Maximum Case Temp (UL):	90°C
Minimum Starting Temp:	-20°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 95%
Cooling:	Convection
Vibration Frequency:	TBD
Sound Rating:	Class A
Weight:	20 oz. (567g)

- Constant Current, Dimmable
- Programmable Output Current (POC): 660mA to 2000mA
- Dim-to-off mode
- Flicker-free output
- Auxiliary output: 12Vdc, 200mA max
- 0-10V dimming, down to 1% at max POC
- UL Dry & Damp Location Rated, Class 2 output
- UL Class P
- UL Type HL for hazardous locations
- NFC Programming with universal NFC Reader for flexible and precise tuning
- Narrow cross-section fits T5-style ballast channels
- Metal housing
- 5 year warranty*

* For extended warranty options beyond 5 yrs., contact factory.

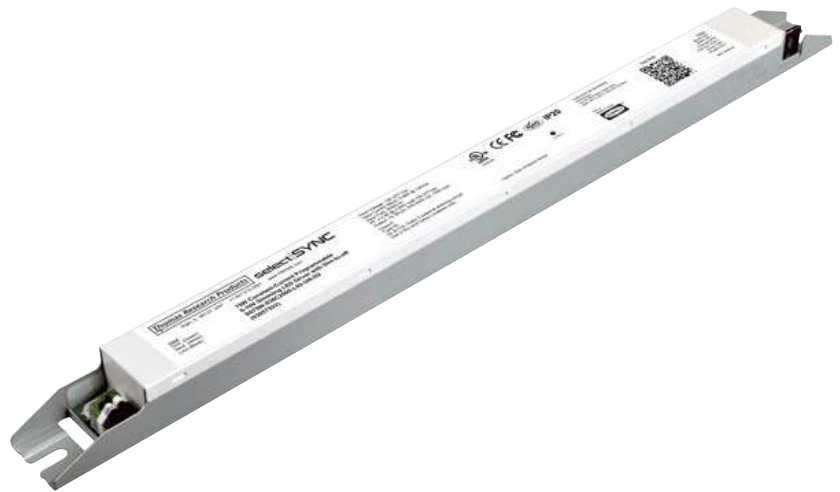

Part	Model	Adj. Current Out (mA \pm 5%)	Voltage Out (Vdc)	Max Power (W)	Wire End
93057522	S075W-038C2000-L02-UN-D2	660-2000	19-38	75	


Class 2: US/Canada

Safety Cert.	Standard
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Class P, UL Type HL
CE	EN61347-1, EN61347-2-13
EMC Standard	Notes
FCC, 47CFR Part 15	ANSI C63.4:2009 (120V input meets Class B, 277V input meets Class A)
EN 61000-3-2	Harmonic Current Emissions Class C
EN 61000-4-5	Part 4-5: Surge Immunity test, 2.5 kV L-N, L-FG & N-FG



Dimensions

IN [mm]

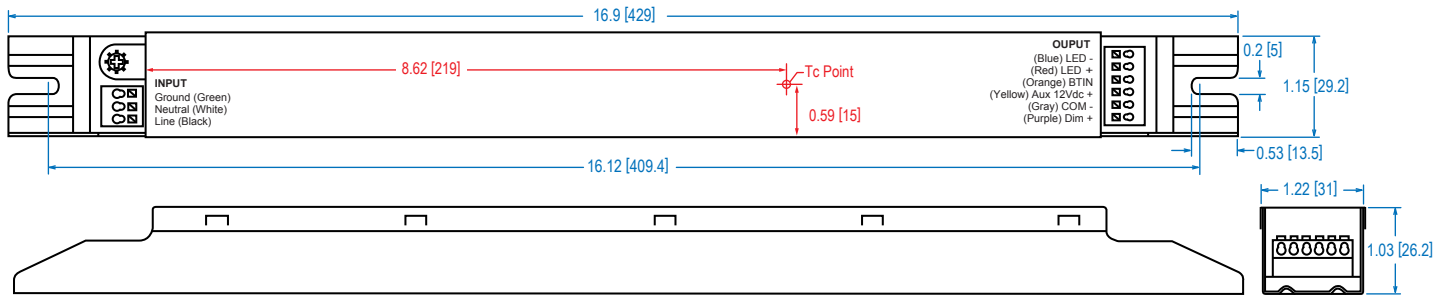


Remote Mounting:





Max Distance 26ft. using #18 AWG

PUSH IN CONNECTORS

Wire Gauge: Solid Copper
AWG22-18 [0.6-1.0 mm²]



Power Characteristics

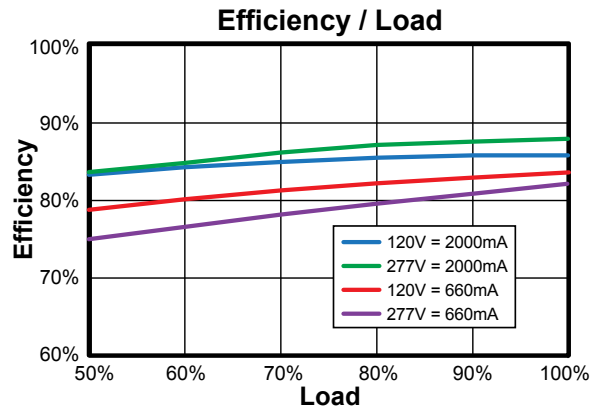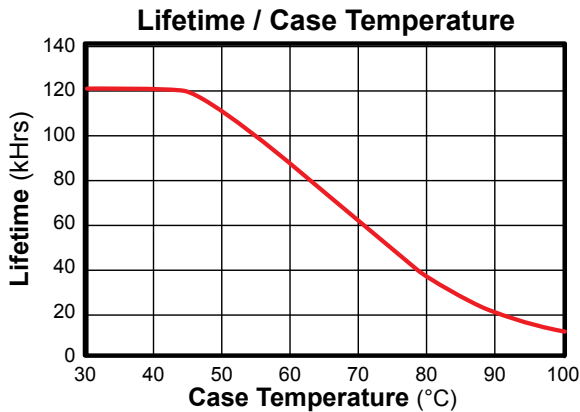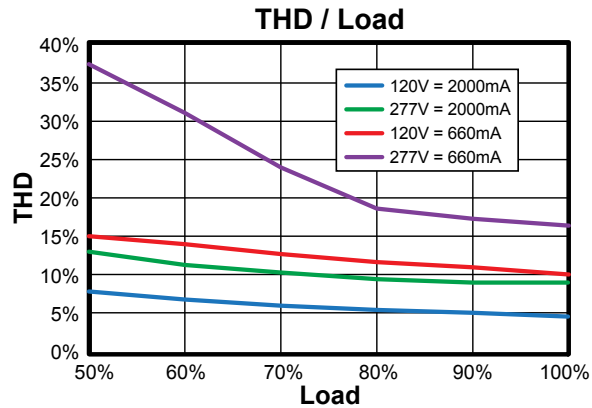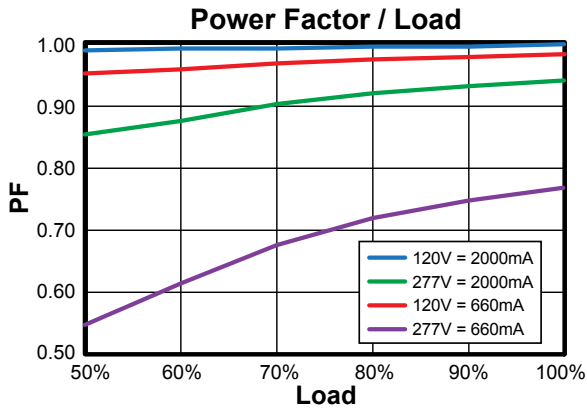


Parameter Defaults


Parameter	Default Setting	Setting Range	Increment
Output Current (mA)	2000	660 - 2000	1

Note: The area under the life-temperature curve represents where the driver has highly reliable operation within specification. Driver performance may drift out of published specifications as the hours of operation exceed the curve at a given temperature. Higher operating temperatures increase the chances of a failure to function. Other electrical, mechanical and environmental factors affect driver lifetime but are not represented in this calculation.

Wiring

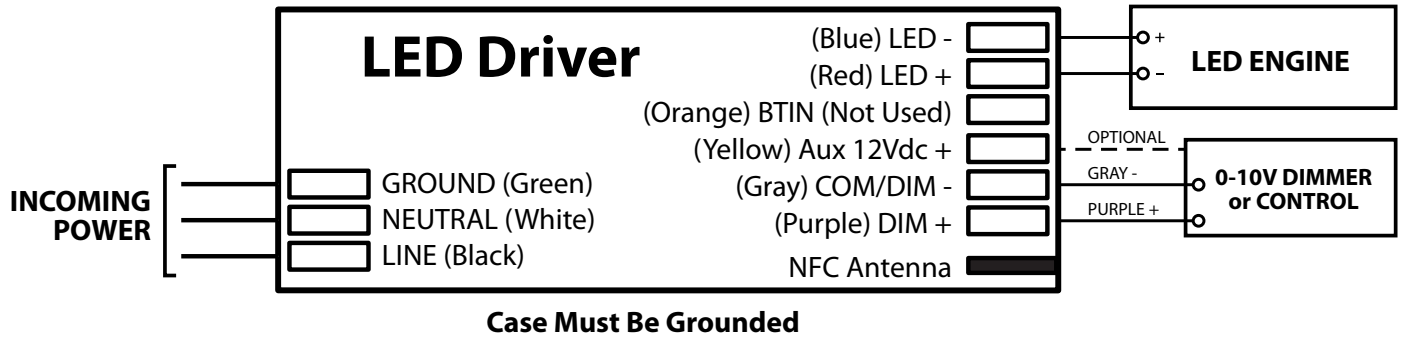

Power Operating Window

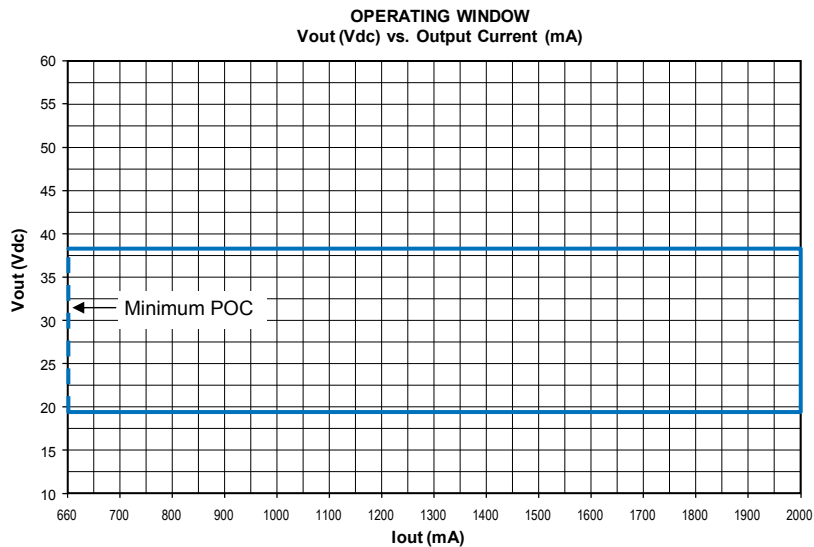

Labeling Programmable Drivers

It is highly recommended that the drivers be labeled with information traceable to the programmed current.
This information is critical to answering any field questions from the contractor or end user.


Programming Guide

Refer to the SelectSYNC Programming Software User's Manual.


Dimming: 0-10Vdc

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	---	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-60V	---	+15V


Typical Dimming Circuit: 2-Wire Resistance

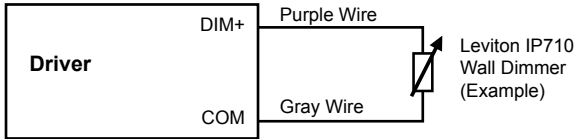

Typical Dimming Circuit: 2-Wire 0-10V Analog

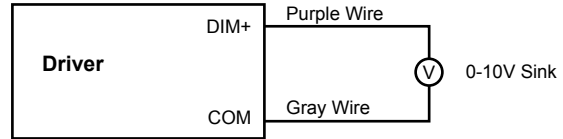

Operating Current Behavior by AD Voltage

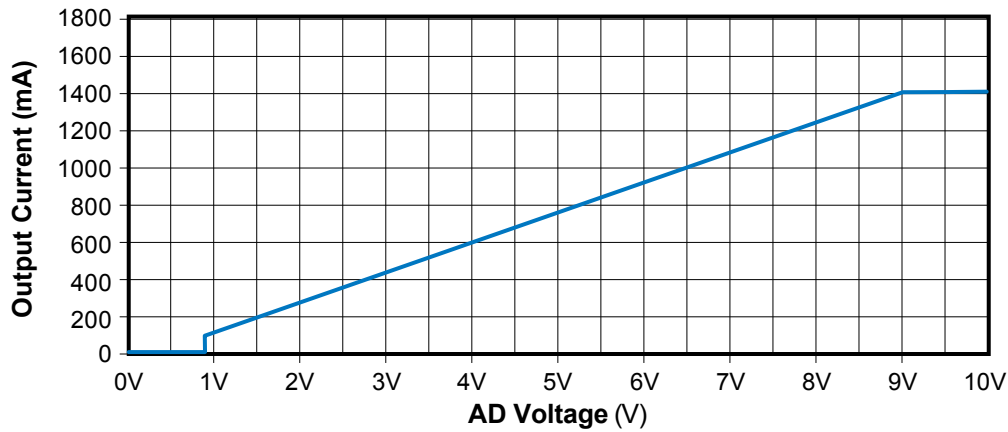

0-10V Dimming Notes:

1. Part comes with two dimming input connectors +Purple/-Gray on the output side.
2. Part is compatible with most 0-10V Wall Slide dimmers and 0-10V dimming.
3. Output current will be 1% when $V_{dim}=1.0V$.
4. Output current will be 0% (off) when $V_{dim} < 0.85V_{dc}$.
5. Output will be 100% with Purple/Gray open and 0% with Purple/Gray Shorted.