



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



S1D13517 External SDRAM LCD Controller

March 2009


The S1D13517 is a color LCD graphics controller which uses an external SDRAM display buffer. The S1D13517 supports an 8/16-bit indirect host interface while providing high performance bandwidth to external SDRAM, allowing for fast screen updates.

The S1D13517 supports displays up to 960x540 (QHD) @ 24 bpp or 800x600 (SVGA)@ 24bpp, controlling a main the window and up to two Picture-in-Picture windows. Additionally, the S1D13517 is designed with a 2D Graphics Engine with Alpha Blending. The S1D13517 uses a double-buffer architecture to prevent any visual tearing during streaming video screen updates.

■ FEATURES

- Easy to use, Easy to connect
- External 16M-bit, 64M-bit or 128M-bit SDRAM
- High performance SDRAM controller
- 8/16-bit asynchronous indirect parallel interface (used for display or register data)
- Input data formats: RGB 8:8:8, RGB 5:6:5
- Active Matrix TFT interface: 18/24-bit interface
- Supports resolutions up to 960x540 or 800x600
- Software Power Save mode
- Main Display Window with two Picture-in-Picture windows
- 180° hardware rotation and mirror of display image
- Double-Buffer available to prevent image tearing during streaming input
- PWM output for LCD backlight control
- Internal programmable PLL
- SS (Spread spectrum) clock available
- General Purpose Output pins

■ SYSTEM BLOCK DIAGRAM

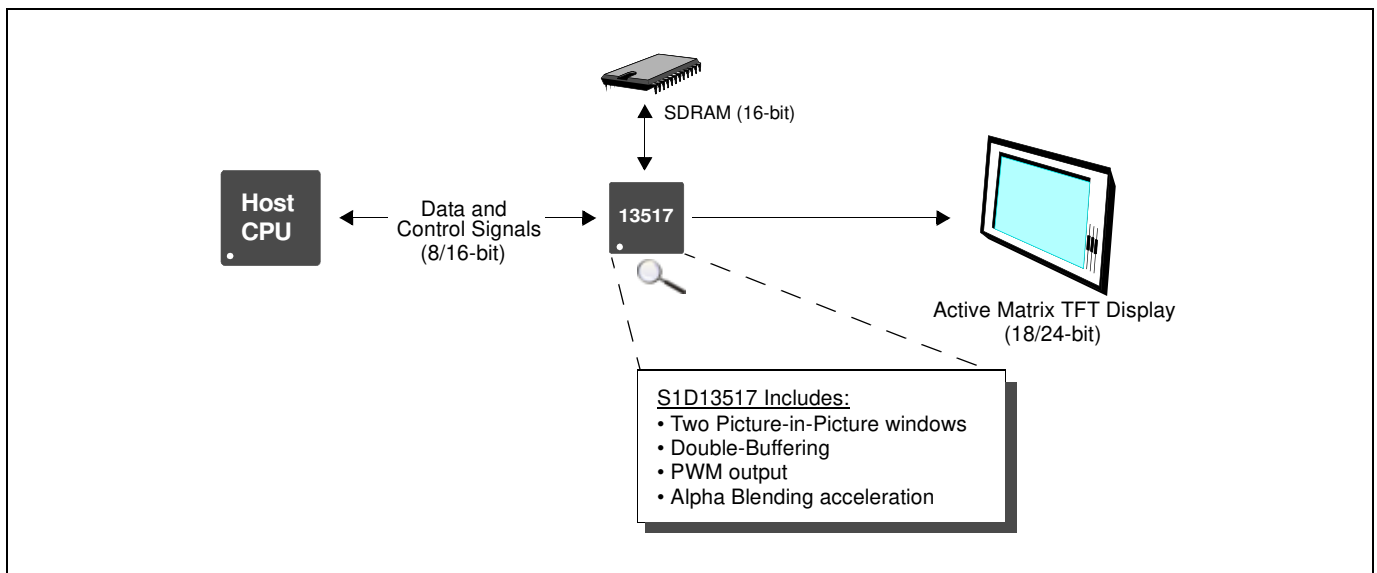

S1D13517

■ DESCRIPTION

Frame Buffer

- External 16M-bit, 64M-bit or 128M-bit SDRAM memory support
 - Maximum 90MHz SDRAM clock
 - 16-bit bus width
 - Maximum 16-Buffer separation available

Host Interface

- 8/16-bit asynchronous parallel interface (used for display or register data)
 - Indirect addressing Intel80 interface
 - Burst and rectangular write available for memory

Input Data Format

- RGB 8:8:8, RGB 5:6:5

Display Support

- Active Matrix TFT
 - 18/24-bit interface
- Supports resolution up to 960x560 (QHD)
 - HVGA, VGA, WVGA, SVGA

Power

- COREVDD 2.5 volts, PLLVDD 2.5 volts and IOVDD 3.3 volts

Display Features

- 24 bit-per-pixel (bpp) color depths
- Display window
- Two Picture-in-Picture windows
- 2D graphics engine (Alpha blending, Copy)
- 180° hardware rotation and mirror of display image.
- Double-Buffer available to prevent image tearing during streaming input
- Software Multi-Buffer available for simple animation
- TE (Tearing Effect) output

Clock Source

- Internal programmable PLL (Maximum 180MHz)
- Spread Spectrum clock available for PCLK and SDCLK (note: frequency: 31MHz to 80MHz)
- LCD pixel clock (Maximum PCLK = 45MHz)
- SDRAM clock (Maximum SDCLK = 90MHz)

Miscellaneous

- PWM output for LCD backlight control
- Software Power Save mode
- General Purpose Output pins are available (GPO[3:0])
- QFP15 128-pin package (16mm x 16mm x 1.7mm)

CONTACT YOUR SALES REPRESENTATIVE FOR COMPREHENSIVE DESIGN TOOLS

- S1D13517 Technical Documentation
- CPU Independent Software Utilities
- S1D13517 Evaluation Boards
- Royalty Free source level driver code

Japan

Seiko Epson Corporation
IC International Sales Group
421-8, Hino, Hino-shi
Tokyo 191-8501, Japan
Tel: +81-42-587-5814
Fax: +81-42-587-5117

North America

Epson Electronics America, Inc.
2580 Orchard Parkway
San Jose, CA 95131, USA
Tel: +1-800-228-3964
Fax: +1-408-922-0238

China

Epson (China) Co., Ltd.
7F, Jinbao Bldg.
No. 89 Jinbao St.
Dongcheng District
Beijing 100005, China
Tel: +86-10-6410-6555
Fax: +86-10-6410-7320

Taiwan

Epson Taiwan Technology & Trading Ltd.
14F, No. 7
Song Ren Road
Taipei 110, Taiwan
Tel: +886-2-8786-6688
Fax: +886-2-8786-6660

Hong Kong

Epson Hong Kong Ltd.
20/F, Harbour Centre
25 Harbour Road
Wanchai, Hong Kong
Tel: +852-2585-4600
Fax: +852-2827-4346

Europe

Epson Europe Electronics GmbH
Riesstrasse 15
80992 Munich, Germany
Tel: +49-89-14005-0
Fax: +49-89-14005-110

Singapore

Epson Singapore Pte., Ltd.
1 HarbourFront Place
#03-02 HarbourFront Tower One
Singapore 098633
Tel: +65-6586-5500
Fax: +65-6271-3182

Korea

Seiko Epson Corp.
Korea Office
50F, LK1 63 Bldg.
60 Yoido-dong, Youngdeungpo-Ku,
Seoul, 150-763, Korea
Tel: +82-2-784-6027
Fax: +82-2-767-3677

©SEIKO EPSON CORPORATION 2008-2009. All rights reserved.
Information in this document is subject to change without notice. You may download and use this document, but only for your own use in evaluating Seiko Epson/EPSON products. You may not modify the document. Epson Research and Development, Inc. disclaims any representation that the contents of this document are accurate or current. The Programs/Technologies described in this document may contain material protected under U.S. and/or International Patent laws.
EPSON is a registered trademark of Seiko Epson Corporation. All other trademarks are the property of their respective owners.